

elcometer®

protective coatings inspection equipment

elcometer®

protective coatings  
inspection equipment



## Divisions of Elcometer



### Blast Equipment

The Elcometer range of high performance abrasive blast machines, media valves, air handling, blast hose, blast nozzles, personal protective equipment and blast inspection & test equipment is engineered to be tough, safe and incredibly durable.



### Spray Equipment

To meet the needs of the automotive refinishing, industrial finishing and refinishing markets+ the Elcometer Spray Equipment range of spray guns, fluid application & filtration systems and personal protective equipment ensures a fast and efficient high quality finish.



### Coatings Inspection

Ever since our first coating thickness gauge in 1947, Elcometer has been a world leader in the design, manufacture & supply of inspection equipment to the coatings inspection industry, building a global network in 170 countries to meet the needs of the protective & industrial finishings industries.



### NDT Equipment

Accurate and easy to use, Elcometer's NDT inspection equipment is ideal for measuring material thickness, sound velocity and detecting a wide range of flaws in a variety of materials, perfect for corrosion assessment in a broad range of industry applications.

## Elcometer's **Coatings Inspection Equipment** division is divided into two distinct sectors:



**Protective coatings inspection equipment**  
this product catalogue provides a full range of inspection equipment for the protective coatings industry, from offshore platforms to shipyards, bridges to wind farms, mining to reservoirs, for more information visit our website [protective.elcometer.com](http://protective.elcometer.com)



**Industrial finishing & physical test equipment**  
a full range of inspection equipment designed for the industrial finishing, powder coating and general manufacturing industry, whether you are on a production line or in a paint laboratory, in quality assurance or an academic institution.





**1 Abrasive & Blast Inspection**

**2 Material & Corrosion Thickness**

**3 Surface Condition, Profile & Roughness**

**4 Surface Cleanliness**

**5 Climatic Conditions**

**6 Wet Film Thickness**

**7 Dry Film Thickness**

**8 Adhesion Testing**

**9 Pinhole & Porosity**

**10 Inspector's Accessories**

**11 Inspection Kits**

**12 Data Management Software**

**13 Concrete Inspection & Metal Detection**



With a range of products specifically developed to meet the needs of the protective coatings industry, **Elcometer** is well positioned to provide you with **the solution to your inspection requirements**, whatever and wherever they might be.



**elcometer**

## Our Company

We will ensure that Elcometer is the leading manufacturer and supplier of quality control instrumentation within the inspection, Monitoring & Control sector.

This will be achieved through the design, manufacture and supply of industry leading, innovative, high quality products; supported by a best-in-class customer experience and delivered by a highly capable and motivated team, within a culture of continuous improvement and in accordance with ISO 9001.

**elcometer**

## Our Values

**Our Values Shape Our Culture.**

- Pride:** We are proud of where we work and the work we do
- Ownership:** We take responsibility for what we do and how we do it
- Ethics:** We treat our customers, suppliers and colleagues fairly and with respect
- Achievement:** We believe that just enough is not enough
- Focus:** We know that if it is not acceptable to us it is not acceptable to our customers
- Initiative:** We are encouraged to identify opportunities for improvement and offer solutions

**elcometer**

## Environmental Policy

Protection of our environment is an integral part of Elcometer's activities. We take a responsible approach to environmental management throughout our Company, with our Board of Directors being responsible for our environmental performance.

We are committed to the achievement of the expectations of our customers and stakeholders through the alignment of our environmental objectives to our programme of continuous improvement in order to reduce our total impact on the environment.

- All relevant compliance obligations requirements are met
- Environmental performance is monitored and reviewed on a regular basis
- Any emissions to air, releases to water, energy usage or disposal of solid waste to landfill does not cause unacceptable environmental effects
- Our business is conducted in a way that respects our neighbours

For more than seventy years Elcometer has been a world leader in the design, manufacture and supply of inspection equipment to the coatings industry.

Ever since the first Elcometer gauge was manufactured in 1947, our philosophy has been to provide industry leading, innovative, high quality products; supported by a best-in-class customer experience; at a competitive price. By concentrating on these core values, Elcometer has grown into a global network with representation in over 170 countries.

In 2018 Elcometer expanded its product range to include the design and manufacture of high performance abrasive blast equipment, including portable abrasive blast machines, media valves, air handling, personal protective equipment, hoses and a full range of accessories.

For more information on Elcometer's range of blast equipment, visit [www.elcometer.com](http://www.elcometer.com).

### Our Values

|                     |  |
|---------------------|--|
| <b>Pride;</b>       | We are proud of where we work and the work we do                                 |
| <b>Ownership;</b>   | We take responsibility for what we do and how we do it                           |
| <b>Ethics;</b>      | We treat our customers, suppliers and colleagues fairly and with respect         |
| <b>Achievement;</b> | We believe that just enough is not enough  |
| <b>Focus;</b>       | We know that if it is not acceptable to us it is not acceptable to our customers |
| <b>Initiative;</b>  | We are encouraged to identify opportunities for improvement and offer solutions  |



### Quality is part of our culture

Elcometer's commitment to quality is reflected in our ISO 9001 and ISO 14001 Quality and Environmental certifications.

It is the Company philosophy to integrate quality into all aspects of the product - whether it be the initial product design, the manufacture or our commitment to our customers.

We are committed to meet or exceed the expectations of our customers and stakeholders by aligning our quality objectives for product, sales and service performance and delivery.

Elcometer is committed to reducing its impact on the environment, including product manufacture, packaging, catalogue production and our zero to landfill waste management. All our products are lead and mercury free and, where required, CE and RoHS compliant.

To view all our Company Policies and ISO certifications, visit [www.elcometer.com](http://www.elcometer.com)

### Service and Support

Elcometer has Distributor representation in over 170 countries around the world, all comprehensively trained on our coating inspection products, providing a full after sales service and support within your region.

Our aim is to provide you with a complete solution to all your coating inspection requirements.

### Training

Elcometer offers first class training on all its products to all our customers either at your facility or at our state of the art training facilities in England, Germany, United Arab Emirates or the USA. For more information please contact Elcometer.

### Fit for Purpose

All Elcometer products are designed to be used in accordance with National and International Standards. We have a team of experts working with Standards bodies around the world, ensuring we have products fit for purpose, exceeding the demands of our customers.

In this catalogue, we have identified the latest National and International Standards - those in Orange are current and those in Grey have been superseded but are still recognised in some industries.

We continuously review our products against current and new Standards. For the most up to date list of Standards, visit our online catalogue which provides the latest information on all new, current and superseded Standards which our products can be used in accordance with.

### Product Innovation

Elcometer continues to be a leader in product innovation for the coating inspection in both hardware and software design and has a team of specialists dedicated to product development.

We are committed to continuously push the boundaries through our new product development programmes.



| Model Number      | Start Page  | Model Number       | Start Page   | Model Number      | Start Page   |
|-------------------|-------------|--------------------|--------------|-------------------|--------------|
| Elcometer 102     | <b>1-9</b>  | Elcometer 137      | <b>10-4</b>  | Elcometer 331     | <b>13-12</b> |
| Elcometer 103     | <b>1-9</b>  | Elcometer 138      | <b>1-4</b>   | Elcometer 331B    | <b>13-10</b> |
| Elcometer 106     | <b>8-18</b> | Elcometer 138/2    | <b>1-5</b>   | Elcometer 331HM   | <b>13-8</b>  |
| Elcometer 106/6   | <b>8-20</b> | Elcometer 138-1C   | <b>4-14</b>  | Elcometer 410     | <b>5-14</b>  |
| Elcometer 107     | <b>8-32</b> | Elcometer 138 ASTM | <b>1-4</b>   | Elcometer 456     | <b>7-6</b>   |
| Elcometer 108     | <b>8-26</b> | Elcometer 138 BSM  | <b>4-15</b>  | Elcometer 456 IPC | <b>7-30</b>  |
| Elcometer 112     | <b>6-3</b>  | Elcometer 139      | <b>4-21</b>  | Elcometer 500     | <b>7-33</b>  |
| Elcometer 112 AL  | <b>6-5</b>  | Elcometer 141      | <b>7-54</b>  | Elcometer 506     | <b>8-15</b>  |
| Elcometer 113     | <b>5-10</b> | Elcometer 142      | <b>4-22</b>  | Elcometer 508     | <b>8-24</b>  |
| Elcometer 114     | <b>5-9</b>  | Elcometer 143      | <b>13-23</b> | Elcometer 510     | <b>8-6</b>   |
| Elcometer 115     | <b>6-4</b>  | Elcometer 144      | <b>10-6</b>  | Elcometer 900     | <b>10-5</b>  |
| Elcometer 116     | <b>5-8</b>  | Elcometer 145      | <b>4-22</b>  | Elcometer 990     | <b>7-46</b>  |
| Elcometer 119     | <b>3-4</b>  | Elcometer 147      | <b>3-4</b>   | Elcometer 999     | <b>3-5</b>   |
| Elcometer 121/4   | <b>7-52</b> | Elcometer 148      | <b>1-6</b>   | Elcometer 1540    | <b>8-35</b>  |
| Elcometer 122     | <b>3-13</b> | Elcometer 154      | <b>6-5</b>   | Elcometer 1542    | <b>8-34</b>  |
| Elcometer 123     | <b>3-12</b> | Elcometer 181      | <b>13-6</b>  | Elcometer 2210    | <b>10-11</b> |
| Elcometer 124     | <b>3-14</b> | Elcometer 210      | <b>5-10</b>  | Elcometer 2410    | <b>10-12</b> |
| Elcometer 125     | <b>3-14</b> | Elcometer 211      | <b>7-42</b>  | Elcometer 2434    | <b>10-10</b> |
| Elcometer 127     | <b>3-15</b> | Elcometer 212      | <b>5-11</b>  | Elcometer 2435    | <b>10-9</b>  |
| Elcometer 128     | <b>3-3</b>  | Elcometer 213/2    | <b>5-12</b>  | Elcometer 2436    | <b>10-10</b> |
| Elcometer 129     | <b>3-15</b> | Elcometer 214L     | <b>5-13</b>  | Elcometer 2437    | <b>10-9</b>  |
| Elcometer 130     | <b>4-9</b>  | Elcometer 2210     | <b>10-11</b> | Elcometer 3230    | <b>6-6</b>   |
| Elcometer 130 SSP | <b>4-3</b>  | Elcometer 224      | <b>3-6</b>   | Elcometer 3236    | <b>6-3</b>   |
| Elcometer 131     | <b>10-3</b> | Elcometer 236      | <b>9-19</b>  | Elcometer 3238    | <b>6-4</b>   |
| Elcometer 132     | <b>10-5</b> | Elcometer 260      | <b>9-21</b>  | Elcometer 7000    | <b>13-22</b> |
| Elcometer 134A    | <b>1-3</b>  | Elcometer 266      | <b>9-16</b>  | Elcometer 7210    | <b>10-4</b>  |
| Elcometer 134 CSN | <b>4-20</b> | Elcometer 270      | <b>9-6</b>   | Elcometer 7410    | <b>13-23</b> |
| Elcometer 134S    | <b>4-19</b> | Elcometer 280      | <b>9-10</b>  | Elcometer MTG     | <b>2-3</b>   |
| Elcometer 134W    | <b>1-3</b>  | Elcometer 308      | <b>5-7</b>   | Elcometer P500    | <b>13-26</b> |
| Elcometer 135C    | <b>4-13</b> | Elcometer 309      | <b>5-7</b>   |                   |              |
| Elcometer 135B    | <b>4-13</b> | Elcometer 319      | <b>5-3</b>   |                   |              |





Whether you're looking to **find out more** about an Elcometer product, its **application** or learn more about **optimal use** of an instrument, **Elcometer's videos** provide a quick and simple guide.

For our full video library visit **elcometer.tv**

Elcometer products with a video will show the '**video available**' symbol








Jetec®



# Abrasive & Blast Inspection

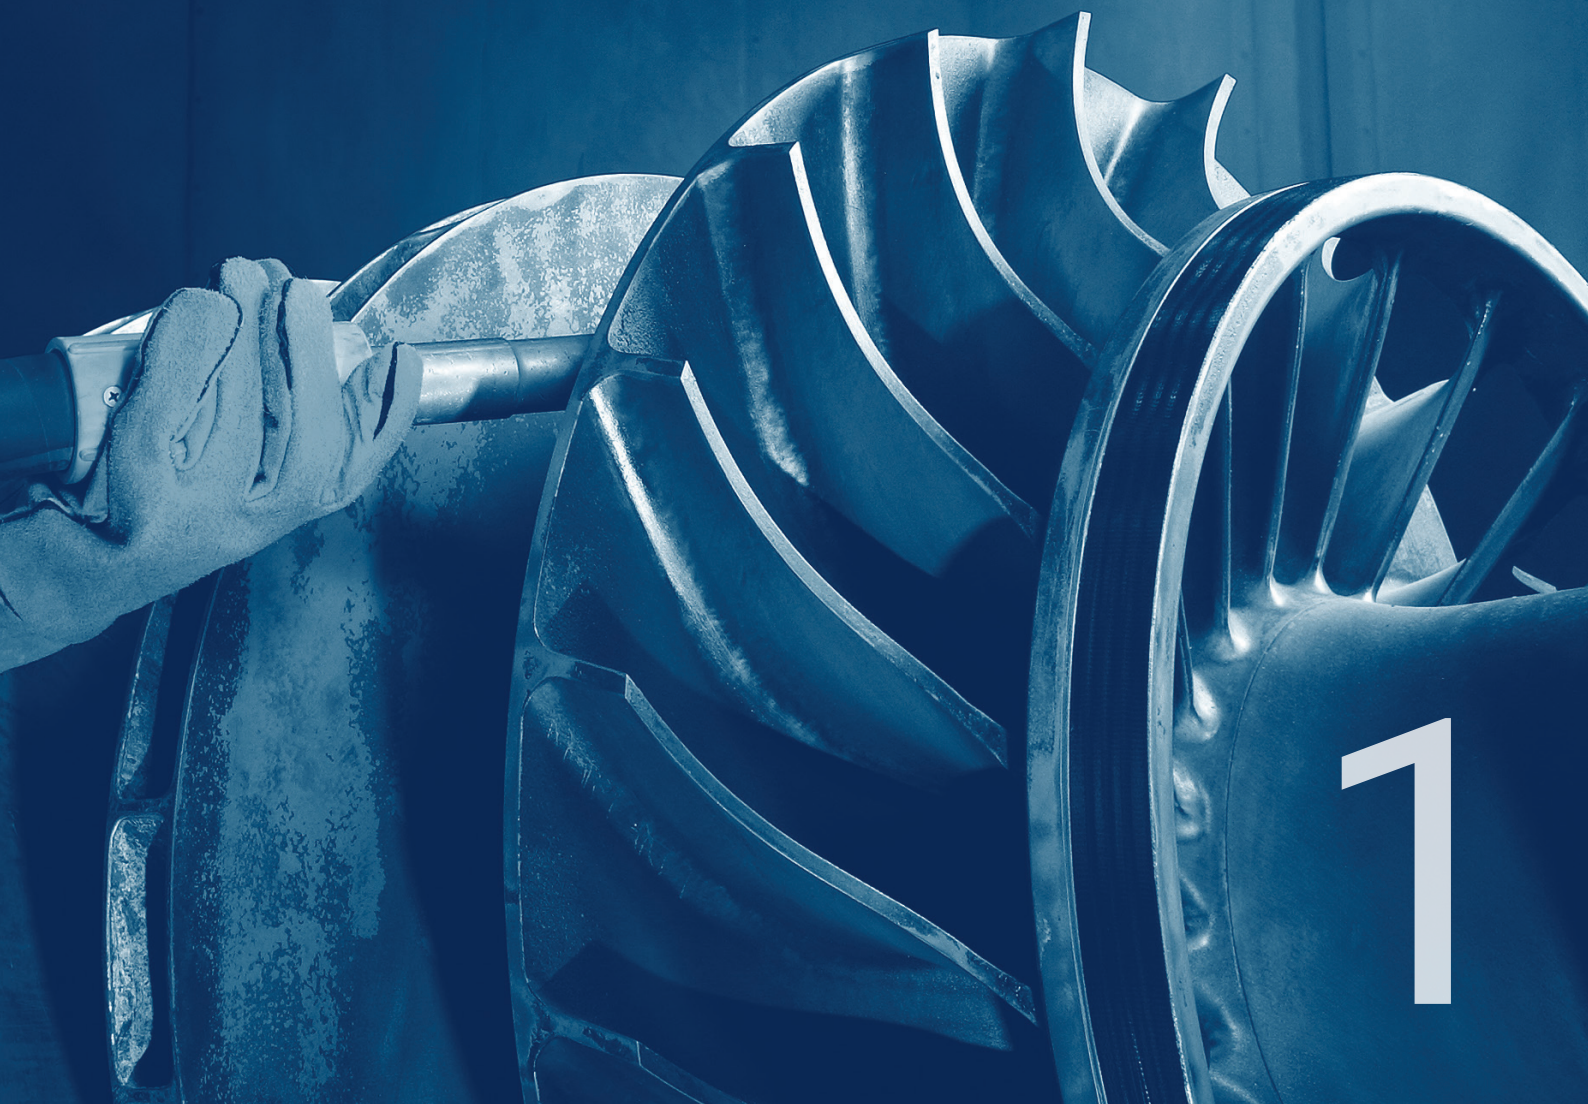

1





**Surface preparation is one of the most important factors in the successful application of a coating or surface treatment and is critical to the effective lifetime of the coating. For any coating to perform it is essential that the substrate is prepared properly.**


A number of important parameters need to be monitored during the blasting or water jetting process, these include: air pressure (at the nozzle), nozzle diameter, blast media contamination & pH values in order to avoid recontamination of the substrate during blasting.

Abrasives used for blast cleaning surfaces can be contaminated with soluble salts due to the source or the re-use of the blasting media. This contamination can be transferred to the blast cleaned surface and result in accelerated corrosion conditions and also cause premature coating failure if this contamination is not removed prior to applying the coating.

Measuring the level of contaminants on a surface prior to application of the coating is essential to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly recoating and high maintenance costs.

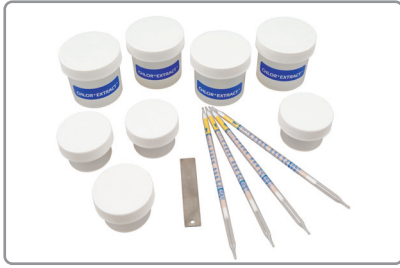

**Elcometer 134A****Chloride Ion Test Kit for Abrasives**

Chlorides deposited on a surface by contaminated abrasives during blasting can cause a coating to fail prematurely.

Contamination can build up, particularly if the blast media is recycled several times. Using the Elcometer 134A Chloride Ion Test in the field will accurately identify contamination and prevent costly surface-related failures.

**Technical Specification**

| Part Number        | Description   |            |                            |
|--------------------|---|------------|----------------------------|
| <b>E134----2</b>   | Elcometer 134A Chloride Ion Test Kit for Abrasives (4 Tests per Kit)  |            |                            |
| Measuring Range    | 1 - 60µg/cm <sup>2</sup> (1 - 60ppm)  | Resolution | 1µg/cm <sup>2</sup> (1ppm) |
| Sample Time        | 1.5 minutes (approx)  |            |                            |
| Storage Conditions | Not exceeding 25°C (77°F)   |            |                            |
| Dimensions         | 185 x 125 x 110mm (7 x 5 x 4.5")  | Weight     | 367g (13oz)                |
| Packing List       | 4 x test kits, containing: abrasive sample container, mixing container with a pre-measured quantity of solution, titration tube, titration tube snapper, strap and operating instructions |            |                            |

**Elcometer 134W****Chloride Ion Test Kit for Water**

The Elcometer 134W is used to monitor recycled water (after it has been applied) to establish effectiveness of salt removal, this test is ideal for testing the salt contamination in wash water and blast water.

If the chloride levels in the wash water are too high, this will promote premature corrosion, shortening the life of both steel and concrete structures.

This test can also be used when mixing concrete.

**Technical Specification**

| Part Number        | Description   |            |                              |
|--------------------|---|------------|------------------------------|
| <b>E134----3</b>   | Elcometer 134W Chloride Ion Test Kit for Liquids (5 Tests per Kit)  |            |                              |
| Measuring Range    | 10 - 2000µg/cm <sup>2</sup> (10 - 2000ppm)  | Resolution | 10µg/cm <sup>2</sup> (10ppm) |
| Sample Time        | 1.5 - 4 minutes (approx)  |            |                              |
| Storage Conditions | Not exceeding 25°C (77°F)   |            |                              |
| Dimensions         | 185 x 125 x 110mm (7 x 5 x 4.5")  | Weight     | 208g (7oz)                   |
| Packing List       | 5 x test kits each containing: sample container bottle with dropper in lid, titration tube, titration tube snapper and operating instructions |            |                              |

**For Chloride Ion Test Kits for surfaces see page 4-19**





## Elcometer 138

## Abrasive Soluble Salt Test Kit



Abrasives used for blast cleaning surfaces can be contaminated with soluble salts due to the source or the re-use of the blasting media. This contamination can be transferred to the blast cleaned surface and result in accelerated corrosion conditions which may cause premature coating failure, if this contamination is not removed prior to applying the coating.

Testing abrasives on site for soluble salt contamination can be carried out quickly and easily using the Elcometer 138 Abrasive Soluble Salt Test Kit, according to the ASTM D4940 method. A measured volume of the abrasive is mixed with the same volume of water and agitated to allow any soluble salts to dissolve in the water. The resulting slurry is allowed to settle and the filtered water can then be tested using a conductivity meter. The Elcometer 138 Abrasive Soluble Salt Test Kit provides all that is needed to carry out the test in the field or in the laboratory.

**STANDARDS:**  
ASTM D4940

### Technical Specification

| Part Number       | Description  |
|-------------------|--|
| <b>E138-A-CM</b>  | Elcometer 138 Abrasive Soluble Salt Test Kit with Elcometer 138 Conductivity Meter   |
| Measurement Range | 0 - 19.99mS/cm (see Elcometer 138 Conductivity Meter for full specification)   |
| Accuracy          | ±2% of full scale (see Elcometer 138 Conductivity Meter for full specification)  |
| Dimensions        | 456 x 384 x 127mm (18 x 15.1 x 5")   |
| Weight            | 2.2kg (4lb 14oz)   |
| Packing List      | Elcometer 138 Conductivity Meter, 1000ml (33.8 fl oz) bottle of pure distilled water, 100ml & 600ml (3.4 & 20.3 fl oz) glass beakers, 500ml (16.9fl oz) plastic measuring beaker, funnel, stirring rod, box of 100 filter papers, 1 x 14ml (0.47fl oz) standard 1413 µS/cm (1.413 mS/cm) calibration solution, 1 x 14ml (0.47fl oz) conditioning solution, 2 x CR2032 batteries, transit case and user guide |

### Accessories

|                    |   |
|--------------------|---|
| <b>E138-CM</b>     | Elcometer 138 Conductivity Meter                                  |
| <b>T13830628</b>   | Replacement Sensor for Conductivity Meter                         |
| <b>T13830629-2</b> | Standard 1413µS/cm Calibration Solution; 250ml (8.45fl oz) Bottle |
| <b>T13827494</b>   | Pure Distilled Water 1000ml (33.8fl oz) Bottle                    |
| <b>T13827495</b>   | Glass Beaker 100ml (3.4fl oz)                                     |
| <b>T13827496</b>   | Glass Beaker 600ml (20.3fl oz)                                    |
| <b>T13827498</b>   | Plastic Measuring Beaker 500ml (16.9fl oz)                        |
| <b>T13827497</b>   | Funnel  |
| <b>T13827499</b>   | Stirring Rod  |
| <b>T13827500</b>   | Box of 100 Filter Papers (Grade 413)                              |



elcometer®

**For abrasive blast machines,  
blast hose, blast nozzles &  
protective equipment**

visit [blast.elcometer.com](http://blast.elcometer.com)

**Elcometer 138/2****Surface Contamination Kit****STANDARDS:**

AS 3894.6-A, AS 3894.6-D,  
SSPC Guide 15

Measuring the level of contaminants on a surface prior to application of the coating is essential to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly recoating and high maintenance costs.

The Elcometer 138/2 Surface Contamination Kit provides the user with a means for testing invisible surface contaminants including:

- pH
- iron
- chloride ions
- salts

**Technical Specification**

| Part Number       | Description  | Certificate           |
|-------------------|--|-----------------------|
| <b>E138----</b> 2 | Elcometer 138/2 Surface Contamination Kit  | ●                     |
| Measuring Range   | Iron: 3,10, 25, 50, 100, 250, 500mg/l Fe <sup>2+</sup><br>Chloride: 30 - 600µg/cm <sup>2</sup> (30 - 600ppm) Cl  | pH: 0pH to 14pH       |
| Dimensions        | 300 x 220 x 75mm (11 x 8.6 x 3")   | Weight 2.1kg (4.62lb) |
| Packing List      | 100 x pH test strips, 100 x iron test strips, 40 x chloride test strips, 50 x Elcometer 135C Bresle test patches, 3 x 5ml (0.17fl oz) syringes, 3 x needles, 30ml (1fl oz) plastic beaker, carry case and operating instructions |                       |

**Accessories**

|                      |   |                  |   |
|----------------------|---|------------------|---|
| <b>E135----</b> C25  | Elcometer 135C Bresle Test Patch (Pack of 25) | <b>T13827259</b> | Pure Distilled Water, 250ml (8.5fl oz) Bottle |
| <b>E135----</b> C100 | Elcometer 135C Bresle Test Patch (Box of 100) | <b>T13820562</b> | 100 x pH Test Strips                          |
| <b>T13818517</b>     | 3 x 5ml (0.17fl oz) Syringes                  | <b>T13820563</b> | 100 x Iron Test Strips                        |
| <b>T13818518</b>     | 3 x Needles                                   | <b>T13820564</b> | 40 x Chloride Test Strips                     |
| <b>T13818519</b>     | Plastic Beaker, 30ml (1fl oz)                 |                  |   |

**Elcometer 138/2****pH Test Strips**

The Elcometer 138/2 pH Test Strips provide the user with a means for testing acidic or alkaline contaminants.

Day to day air particulate contaminants generated by modern industry generate particulates of hydrocarbons such as sulphur. Agricultural fertilizers generate nitrates. When they combine with moisture in the atmosphere they create sulphuric and nitrate acids, which if present on the substrate, breaks down the surface of any coating. Furthermore, any water used to clean the surface containing levels of pH will have a similar effect.

**Technical Specification**

| Part Number      | Description          |
|------------------|----------------------|
| <b>T13820562</b> | 100 x pH Test Strips |

● Certificate of Cleanliness & Test Area available at [www.elcometer.com/cert](http://www.elcometer.com/cert)



## Elcometer 148

## pH Tester



In many industries, pH measurement is critical to the correct performance of processes. pH is the measure of acidity of a liquid.

The pH scale ranges from 0 to 14pH - where 0pH is acidic and 14pH is alkaline. pH is temperature dependent thus the temperature of the sample under test will affect the pH value recorded.

This simple, easy to use instrument measures both pH and temperature using a single sensor.



The Elcometer 148 sensor has automatic temperature compensation, ensuring like-for-like measurements can be taken for meaningful comparison of the results.

- Simultaneously displays pH and temperature
- Measurement hold / freeze function
- Record maximum and minimum readings over a series of tests
- °C / °F user switchable
- Waterproof to IP57 and floats on water
- Auto power off

The condition of the sensor is automatically monitored after each successive calibration and sensors can be easily replaced by the user as and when required.

**STANDARDS:**  
ASTM E 70

### Technical Specification

| Part Number  | Description  |                         |
|--------------|--|-------------------------|
| H148-----1   | Elcometer 148 pH Tester  |                         |
|              | pH   | Temperature             |
| Range        | 0 to 14pH  | 0 to 89°C (32 to 192°F) |
| Resolution   | 0.01pH   | 0.1°C (0.1°F)           |
| Accuracy     | ±0.03pH  | ±0.5°C (±1°F)           |
| Battery      | 4 x AAA batteries  |                         |
| Calibration  | 3 point at 7pH, 4pH and 10.01pH  |                         |
| Dimensions   | 195 x 40 x 36mm (7.7 x 1.6 x 1.42")  |                         |
| Weight       | 150g (5.3oz)   |                         |
| Packing List | Elcometer 148 pH Tester, pH/Temperature sensor, 4 x AAA batteries, wrist strap, 4pH calibration sachet, 7pH calibration sachet and operating instructions. |                         |

### Accessories

|             |  |
|-------------|--|
| T14821766   | pH/Temperature Sensor  |
| T14821768-1 | 4pH Buffer Solution for Calibration: Capsules, Pack of 10          |
| T14821768-2 | 7pH Buffer Solution for Calibration: Capsules, Pack of 10          |
| T14821768-3 | 9pH Buffer Solution for Calibration: Capsules, Pack of 10          |
| T14821767-1 | 4.01pH Buffer Solution for Calibration: 100ml (3.38 fl oz) Bottle  |
| T14821767-2 | 7pH Buffer Solution for Calibration: 100ml (3.38 fl oz) Bottle     |
| T14821767-3 | 10.01pH Buffer Solution for Calibration: 100ml (3.38 fl oz) Bottle |



**Elcometer 138****Bresle Salt Meter**

Incorporating a flat sensor, the Elcometer 138 Bresle Salt Meter measures the conductivity of a sample, then automatically converts this to show the density of salts, negating the need for the user to do a manual calculation when working in accordance with ISO 8502-6 or ISO 8502-9.

**Features:**

- Highly precise measurements can be obtained from a single drop
- Out of range and low battery alarms
- Visual indication when ambient temperature is outside the operating range

**Technical Specification**

| Part Number           | Description   |   |
|-----------------------|---|---|
| <b>E138-BSM</b>       | Elcometer 138 Bresle Salt Meter   |   |
| Measurement Principle | 2 Electrode Bipolar AC  |   |
| Measurement Mode      | ISO, IMO, Temperature   |   |
| Minimum Sample Volume | 0.12ml  |   |
|                       | ISO Mode  | IMO Mode  |
| Measuring Range       | 0 - 2399µg/cm²  | 0 - 2199µg/cm²  |
| Conversion Factor     | µS/cm to µg/cm² : 0.12<br>µS/cm to mg/m² : 1.2  | µS/cm to µg/cm² : 0.11<br>µS/cm to mg/m² : 1.1            |
| Resolution            | 0 - 239.9µg/cm² : 0.1µg/cm²<br>240 - 2399µg/cm² : 1µg/cm²   | 0 - 219.9µg/cm² : 0.1µg/cm²<br>220 - 2199µg/cm² : 1µg/cm² |
| Accuracy              | ±2% full scale (for each range)   |   |
| Operating Temperature | 5°C to 40°C (41°F to 104°F)   |   |
| Operating Humidity    | 85% or less relative humidity (no condensation)   |   |
| Battery Type          | 2 x CR2032 lithium batteries  |   |
| Battery Life          | approx. 200 hours of continuous use without backlight   |   |
| Weight                | 50g (1.76oz) - including sensor and batteries   |   |
| Dimensions            | 164 x 29 x 20mm (6.5 x 1.1 x 0.79")   |   |
| Packing List          | Elcometer 138 Bresle Salt Meter, 14ml (0.5fl oz) bottle of conditioning solution, 2 x CR2032 lithium batteries and operating instructions |   |

**Accessories**

|                    |   |
|--------------------|---|
| <b>T13830628</b>   | Replacement Sensor  |
| <b>T13830629-1</b> | Standard 84µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle |

## Elcometer 138

## Conductivity Meter




Incorporating a flat sensor, the Elcometer 138 Conductivity Meter can measure the conductivity of a solution from a single drop of a sample.

Users can either place a sample on the meter's flat sensor or immerse the meter's sensor directly into the solution under test. The Elcometer 138 can be used for a broad range of applications, including: soluble salt concentrations, the electric conductivity (EC) of solutions used in agricultural operations and measuring rainwater pollution levels.

### Features:

- Highly precise measurements can be obtained from a single drop
- Automatic range switching gives a wide measurement range of 1 $\mu$ S/cm to 19.99mS/cm
- Out of range and low battery alarms
- Visual indication when ambient temperature is outside the operating range



### Technical Specification

| Part Number           | Description   |
|-----------------------|---|
| <b>E138-CM</b>        | Elcometer 138 Conductivity Meter  |
| Measurement Principle | 2 Electrode Bipolar AC  |
| Measurement Mode      | Conductivity, Temperature   |
| Minimum Sample Volume | 0.12ml  |
| Measuring Range       | 0 - 19.99mS/cm  |
| Resolution            | 0 - 1999 $\mu$ S/cm: 1 $\mu$ S/cm<br>2.00 - 19.99mS/cm: 0.01mS/cm   |
| Accuracy              | $\pm$ 2% full scale (for each range)  |
| Operating Temperature | 5°C to 40°C (41°F to 104°F)   |
| Operating Humidity    | 85% or less relative humidity (no condensation)   |
| Battery Type          | 2 x CR2032 lithium batteries  |
| Battery Life          | approx. 200 hours of continuous use without backlight   |
| Weight                | 50g (1.76oz) - including sensor and batteries   |
| Dimensions            | 164 x 29 x 20mm (6.5 x 1.1 x 0.79")   |
| Packing List          | Elcometer 138 Conductivity Meter, 14ml (0.5fl oz) bottle of conditioning solution, 14ml (0.5fl oz) bottle of standard 1413 $\mu$ S/cm calibration solution, 2 x CR2032 lithium batteries and operating instructions |

### Accessories

|                    |   |
|--------------------|---|
| <b>T13830628</b>   | Replacement Conductivity Sensor   |
| <b>T13830629-2</b> | Standard 1413 $\mu$ S/cm Calibration Solution, 250ml (8.45fl oz) Bottle |



**Elcometer 102****Needle Pressure Gauge**

The Elcometer 102 Needle Pressure Gauge is designed to measure air pressure in blast and air hoses. Pressure drop is responsible for decreased production rates, increased abrasive consumption and reduced anchor profile in abrasive blasting systems.

**Technical Specification**

| Part Number      | Description   |
|------------------|---|
| <b>E102-A</b>    | Elcometer 102 Needle Pressure Gauge   |
| <b>T10229425</b> | Replacement Needle (Pack of 2)  |
| Measuring Range  | 0-300psi (0-20bar)  |
| Dimensions       | 133 x 58 x 28.5mm (5.24 x 2.28 x 1.12")   |
| Weight           | 110g (3.88oz)   |
| Packing List     | Elcometer 102 Needle Pressure Gauge, pressure gauge guard, spare hypodermic needle, protective pouch and operating instructions |


**Elcometer 103****Blast Nozzle Gauge**

The Elcometer 103 Blast Nozzle Gauge measures the orifice size of an abrasive blasting nozzle. This gauge is used to determine the nozzle orifice wear which leads to low nozzle pressure and decreased efficiency in its performance. Nozzle orifice wear results in decreased productivity and increased abrasive media consumption.

To ensure your nozzle provides continuous high production, as a general rule, replace your nozzle when the orifice wears by 1 nozzle size.

**Technical Specification**

| Part Number      | Description   |
|------------------|---|
| <b>E103-A</b>    | Elcometer 103 Blast Nozzle Gauge  |
| <b>T10329146</b> | Black Wax Pencil (Pack of 12)   |
| Measuring Range  | 6.4 - 16mm, ¼ - 5/8" (81 - 548cfm)  |
| Dimensions       | 200 x 19mm (7.87 x 0.75")   |
| Weight           | 150g (5.29oz)   |
| Packing List     | Elcometer 103 Blast Nozzle Gauge, wax/grease pencil (inside gauge), protective pouch and operating instructions |

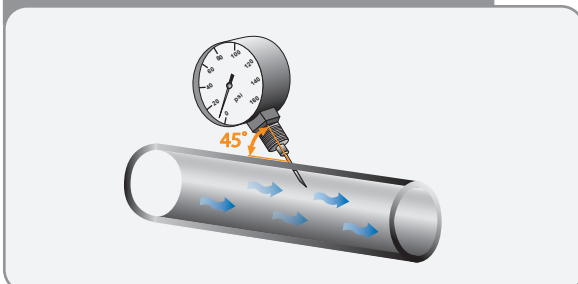**Using a Needle Pressure Gauge****Using a Blast Nozzle Gauge**







A close-up photograph of several stacked, weathered steel beams. The beams are heavily rusted, with a prominent orange-brown patina covering much of their surfaces. The beams are arranged in a slightly offset manner, creating a sense of depth. The lighting is natural, highlighting the textures of the rust and the metallic surfaces.

# Material & Corrosion Thickness

2





**The Elcometer range of ultrasonic material thickness gauges has been designed specifically to be easy to use, calibrate, take readings and create inspection reports.**

With a wide range of measurement modes including: Pulsed Echo (PE), Echo Echo ThruPaint™ (EE) and Velocity Mode (VM), and a wide range of intelligent dual element transducers, the new ultrasonic non destructive thickness gauges can measure the material thickness of virtually any material such as metals, plastics, glass, epoxies and ceramics.

Ideal for measuring material thickness when only one side of the material is accessible, the ultrasonic thickness gauges can measure the material thickness and sound velocity of coated and uncoated surfaces.

From a steel thickness gauge to a gauge which ignores the thickness of the coating, Elcometer has a complete range of ultrasonic thickness gauges to meet your specific requirements.



**Elcometer MTG****Ultrasonic Material Thickness Gauge**

The **Elcometer MTG range** has all the features and functionality necessary for measuring material thickness and velocity on virtually any material - for a wide range of applications.

Auto recognition, ensures correct probe is identified when transducer is changed

Scan Mode at 16Hz, ideal for measuring a large surface area

User selectable reading resolution; 0.1mm (0.01") or 0.01mm (0.001")

Pulse Echo (PE), Echo Echo ThruPaint™ & Velocity (VM) measurement modes

Some MTG gauges are supplied as a gauge only, without transducer. Transducers must be ordered separately.

(Wide range of transducers available - see page 2-11)

Hi & Lo limit indicators provides indication of problem areas

Integrated zero disc, ensures maximum accuracy

Stores up to 100,000 readings in up to 1,000 sequential batches

Selectable reading rate of 4, 8, 16Hz (4, 8, 16 readings per second)

**STANDARDS:**

ASTM E 797, EN 14127, EN 15317



## Elcometer MTG

## Ultrasonic Material Thickness Gauge

### Accurate

A range of calibration options for accuracy and efficiency

The MTG gauges have a range of calibration options including the 1-Point calibration method. Users can also select one of 39 pre-set materials stored within the gauge or store up to three calibrations into the memory.



Easy to use and minimum set up required




Coatings up to 1mm (40mils) can be ignored



Customisable reading display



Set user definable limits for audible and visual pass/fail warnings

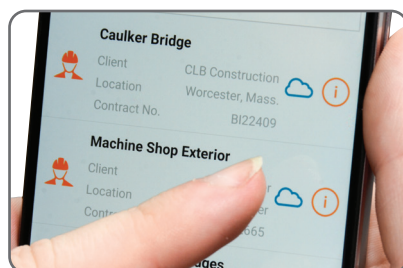

Connect the gauge via Bluetooth® or USB to a mobile device

### Versatile

Measures uncoated & coated surfaces

Flexible & easy to use, the Elcometer MTG range doesn't just measure uncoated surfaces but can also measure coated surfaces. Using Echo Echo ThruPaint™ Mode (EE), coatings up to 1mm (40mils) are ignored.

### Customisable

Choose & customise the reading display

The Elcometer MTG range has a choice of display modes allowing the user to select the most appropriate for their needs; Readings, Selected Statistics, Bar Graph, Run Chart, B-Scan & Differential Mode.

### Intelligent

User definable limits for pass/fail indication

Users are able to set upper and lower limits with audible and visual pass/fail warnings. Limits can be set for individual readings or for each batch.

### Wireless Connectivity

Seamlessly connect to any PC, Android™ or iOS mobile device

Compatible with both ElcoMaster® and ElcoMaster® Mobile App, readings can be downloaded via USB or Bluetooth® to PC, iOS or Android™ devices for further analysis and reporting.



**Elcometer MTG****Ultrasonic Material Thickness Gauge****User Definable Upper and Lower Limits**

The MTG gauges have user definable upper and lower limits with audible and visual pass/fail warnings allowing the user to compare readings to pre-defined values. The MTG8 can store up to 40 pre-programmed limits which can be set for individual readings or for each batch.

If a measurement is taken which falls outside set limits, the reading value and the limit icon turn red, the red LED flashes and the alarm beeps providing immediate indication of problem areas.

**A Range of Calibration Methods**


**1 Point;** after setting the zero point a reading is taken and adjusted on an uncoated sample piece of test material of a known thickness. Once the thickness has been entered and confirmed, the derived sound velocity is displayed.

**2 Point;** readings are taken and adjusted on two uncoated sample pieces of test material with known thicknesses. Once the second thickness has been entered and confirmed, the derived sound velocity is displayed.

**Material;** calibration using the sound velocity of a material, selected from a pre-defined list of materials stored in the gauge.

**Velocity;** calibration using the known sound velocity of the material under test.

**Thickness Set;** calibration is performed using the known thickness of the material under test. Up to three calibrations can also be saved in the gauge memory. Once saved, the user can select the calibration memory - without the need to re-calibrate the gauge.

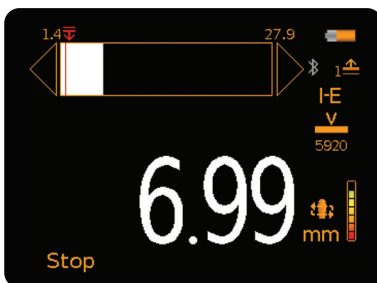**Scan Mode**

When enabled, users can slide the transducer over a large surface area whilst the gauge takes readings at a rate of 16Hz (16 readings per second). During each scan, the live thickness is displayed together with an analogue bar graph showing the thickness relative to the set nominal value and any user defined limits, with audible and visual warnings if any readings fall outside the set limits.

When the transducer is lifted off the surface, the average, lowest and highest thickness value is displayed making scan mode ideal for checking a sample's overall uniformity.

## Elcometer MTG

## Ultrasonic Material Thickness Gauge


### Sequential or Grid Batching



Individual readings can be stored in up to 1,000 sequential or grid type, alpha-numeric batches, together with date and time stamp and reading location\*. Users have the option to view batch readings, statistics and a graph of all readings stored within the batch.

The obstruction feature (Obst), allows the user to record areas of obstruction on the grid where measurements could not be taken.

### B-Scan Reading

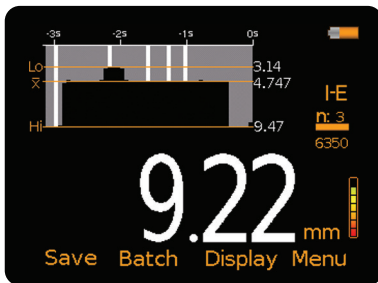

A time based, cross sectional 2 dimensional B-Scan provides a graphical view of the material under test, ideal for relative depth analysis.

The zoom of the B-Scan reading can either be set to automatic or can be defined by the user to focus on areas of interest.

### Differential Mode



Once a user defined nominal thickness value has been set, the gauge displays the measured thickness together with the variation from the set nominal value thus indicating areas of the material which are thinner or thicker than expected.

### Velocity Mode



Velocity mode measures the speed of sound of materials and is ideal for determining the homogeneity of a material/alloy and the correct velocity of a material for calibration.

\* Grid batches only




**Elcometer MTG****Ultrasonic Material Thickness Gauge**


## A choice of display and measurement modes

**Readings**


The reading value is displayed.

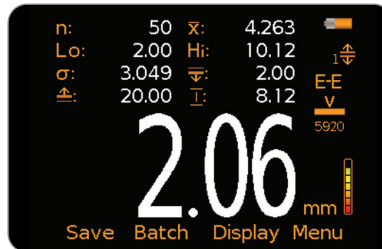**Selected Statistics**

Up to 8 statistical values can be displayed as defined by the user.

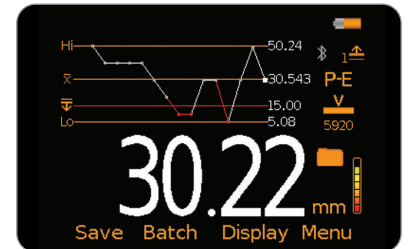**Run Chart**


A line trend graph of the last 20 measurements which is updated after each reading.

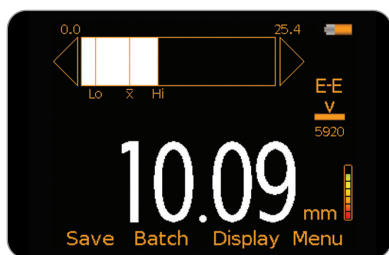**Bar Graph**

An analogue representation of the current measurement value together with the highest (Hi), lowest (Lo) and average ( $\bar{x}$ ) reading.

**Readings & Differential**

The last reading is displayed together with the variation from the nominal value (if set).

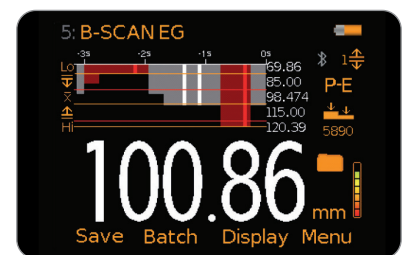**B-Scan**


A cross-sectional view of the material being tested is displayed along with readings taken, saved readings, highest (Hi), lowest (Lo) and average ( $\bar{x}$ ) reading and upper/lower limit values (if set).

**Measurement Modes**

**Pulse Echo (PE);** the total thickness from the base of the transducer to the material density boundary (typically the back-wall) is measured. Suitable for measurement of materials between 0.63mm and 500mm (0.025" to 20") thick.

**Echo Echo ThruPaint™ (EE);** a coating of up to 1.0mm (0.04") thick is ignored and the material thickness from the top surface of the material to the material density boundary (typically the back-wall) is measured. Suitable for measurement of materials between 2.54mm and 25.4mm (0.1" to 1.0") thick.

**Velocity Mode (VM);** measures the speed of sound of the material. Ideal for measuring the homogeneity of a material/alloy.

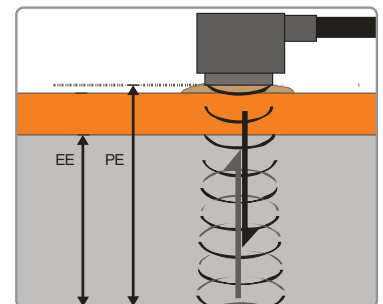

## Elcometer MTG

## Ultrasonic Material Thickness Gauge

## Product Features

| Model Number   | MTG2 | MTG4 | MTG6                    | MTG8                    |
|--|------|------|-------------------------|-------------------------|
| Easy to use menu structure in multiple languages                         | ■    | ■    | ■                       | ■                       |
| Tough, impact, waterproof and dust resistant equivalent to IP54          | ■    | ■    | ■                       | ■                       |
| Bright colour screen with permanent backlight                            | ■    | ■    | ■                       | ■                       |
| Ambient light sensor, with adjustable brightness                         | ■    | ■    | ■                       | ■                       |
| Scratch and solvent resistant display; 2.4" (6cm) TFT                    | ■    | ■    | ■                       | ■                       |
| Large positive feedback buttons  | ■    | ■    | ■                       | ■                       |
| USB power supply via PC  | ■    | ■    | ■                       | ■                       |
| Gauge software updates <sup>1</sup> via ElcoMaster <sup>®</sup> Software | ■    | ■    | ■                       | ■                       |
| 2 year gauge warranty <sup>2</sup>                                       | ■    | ■    | ■                       | ■                       |
| Limits: 40 definable audible & visual pass/fail warnings                 |      |      |                         | ■                       |
| <b>Measurement Mode</b>  |      |      |                         |                         |
| Pulse Echo (PE)  | ■    | ■    | ■                       | ■                       |
| Echo Echo ThruPaint <sup>™</sup> (EE) <sup>3</sup>                       |      | ■    | ■                       | ■                       |
| Velocity Mode (VM)   |      |      | ■                       | ■                       |
| <b>Measurement Rate</b>  |      |      |                         |                         |
| 4, 8, 16Hz   | 4Hz  | 4Hz  | 4, 8, 16Hz <sup>4</sup> | 4, 8, 16Hz <sup>4</sup> |
| <b>Thickness Range<sup>5</sup></b>                                       |      |      |                         |                         |
| PE 0.63-500mm (0.025-19.999")  | ■    | ■    | ■                       | ■                       |
| EE 2.54 - 20.00mm (0.100-0.787")   |      | ■    | ■                       | ■                       |
| <b>Measurement Units</b>   |      |      |                         |                         |
| mm or inches   | ■    | ■    | ■                       | ■                       |
| m/s, inch/μs   |      |      | ■                       | ■                       |
| Repeatability / Stability Indicator                                      | ■    | ■    | ■                       | ■                       |
| <b>Display Mode</b>  |      |      |                         |                         |
| Reading  | ■    | ■    | ■                       | ■                       |
| Selected statistics  |      |      | ■                       | ■                       |
| Scan thickness bar graph   |      |      | ■                       | ■                       |
| Run Chart  |      |      | ■                       | ■                       |
| Readings and Differential  |      |      |                         | ■                       |
| B-Scan cross sectional display   |      |      |                         | ■                       |
| <b>Selectable Reading Resolution</b>                                     |      |      |                         |                         |
| Lo; 0.1mm, 0.01 Inch, 10m/s, or 0.001 in/μs                              | ■    | ■    | ■                       | ■                       |
| Hi; 0.01mm, 0.001 Inch, 1m/s, or 0.0001 in/μs                            |      |      | ■                       | ■                       |

<sup>1</sup> Internet connection required

<sup>2</sup> The Elcometer MTG range is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>3</sup> HD Transducer required

<sup>4</sup> User selectable default setting in Scan Mode is 16Hz

<sup>5</sup> Dependent on the material being measured and the transducer being used



**Elcometer MTG****Ultrasonic Material Thickness Gauge****Product Features**

| Model Number  | MTG2 | MTG4 | MTG6  | MTG8    |
|---|------|------|-------|---------|
| <b>Statistics</b>   |      |      |       |         |
| Number of readings, n; Mean average, $\bar{x}$ ; Standard deviation, $\sigma$ . |      |      | ■     | ■       |
| Lowest reading, Lo; Highest reading, Hi   |      |      | ■     | ■       |
| Low / high limit value  |      |      |       | ■       |
| Reading Range Value $\pm$   |      |      |       | ■       |
| Nominal Value   |      |      |       | ■       |
| Number of readings below the low limit  |      |      |       | ■       |
| Number of readings above the high limit   |      |      |       | ■       |
| <b>Calibration Options</b>  |      |      |       |         |
| Zero (using the integral zero disc)   | ■    | ■    | ■     | ■       |
| 1 - point   |      | ■    | ■     | ■       |
| 2 - point   |      |      | ■     | ■       |
| Material selection; 39 preset materials*  |      | ■    | ■     | ■       |
| Factory; resets to the factory calibration                                      |      | ■    | ■     | ■       |
| Velocity (speed of sound)   |      |      | ■     | ■       |
| Known thickness value   |      |      | ■     | ■       |
| <b>Calibration Features</b>   |      |      |       |         |
| Calibration lock; with optional PIN Lock  |      |      | ■     | ■       |
| Test calibration feature  |      |      | ■     | ■       |
| Calibration memories: 3 programmable memories                                   |      |      |       | ■       |
| Measurement outside calibration warning   |      |      |       | ■       |
| <b>Data Logging</b>   |      |      |       |         |
| Number of readings  |      |      | 1,500 | 100,000 |
| Number of batches   |      |      | 1     | 1,000   |
| Sequential batching   |      |      | ■     | ■       |
| Grid batching   |      |      |       | ■       |
| Fixed Batch Size Mode; with batch linking                                       |      |      |       | ■       |
| Obstruct entry; add 'obst' into grid location                                   |      |      |       | ■       |
| Delete last reading   |      |      | ■     | ■       |
| Date & time stamp   |      |      | ■     | ■       |
| Review, clear & delete batches  |      |      | ■     | ■       |
| Alpha numeric batch names; user definable                                       |      |      |       | ■       |
| Batch review graph  |      |      |       | ■       |
| <b>Data Output</b>  |      |      |       |         |
| USB to PC   | ■    | ■    | ■     | ■       |
| Bluetooth® to PC, Android™ & iOS devices  |      |      | ■     | ■       |
| ElcoMaster® software  |      |      | ■     | ■       |
| <b>Transducer Probe Type</b>  |      |      |       |         |
| Dual Element  | ■    | ■    | ■     | ■       |
| <b>Auto probe recognition</b>   | ■    | ■    | ■     | ■       |
| <b>Auto V-path correction</b>   | ■    | ■    | ■     | ■       |

\* See page 14-9 for list of preset materials

## Elcometer MTG

## Ultrasonic Material Thickness Gauge

## Technical Specification

| Part Number<br>Gauge Only | Complete with 5MHz ¼" right<br>angle dual element transducer | Description   | Certificate |
|---------------------------|--|---|-------------|
|                           | <b>MTG2-TXC</b>  | Elcometer MTG2 Ultrasonic Material Thickness Gauge    | •           |
| <b>MTG4</b>               | <b>MTG4-TXC</b>  | Elcometer MTG4 Ultrasonic Material Thickness Gauge    | •           |
| <b>MTG6DL</b>             | <b>MTG6DL-TXC</b>  | Elcometer MTG6DL Ultrasonic Material Thickness Gauge  | •           |
| <b>MTG8BDL</b>            | <b>MTG8BDL-TXC</b>   | Elcometer MTG8BDL Ultrasonic Material Thickness Gauge | •           |

| Model Number                      | MTG2  | MTG4  | MTG6  | MTG8                                      |
|-----------------------------------|---|---|---|---|
| Measurement Range <sup>1</sup>    |   |   |   |   |
| Pulse Echo (PE)                   | 0.63 - 500mm<br>(0.025 - 19.999")                     | 0.63 - 500mm<br>(0.025 - 19.999")                     | 0.63 - 500mm<br>(0.025 - 19.999")   | 0.63 - 500mm<br>(0.025 - 19.999")         |
| Echo Echo ThruPaint™<br>(EE)      |   | 2.54 - 25.4mm<br>(0.1 - 1.0")                         | 2.54 - 25.4mm<br>(0.1 - 1.0")   | 2.54 - 25.4mm<br>(0.1 - 1.0")             |
| Velocity Mode (VM)                |   | 1,250-10,000m/s<br>(0.0492 - 0.3937in/μs)             | 1,250-10,000m/s<br>(0.0492 - 0.3937in/μs)   | 1,250-10,000m/s<br>(0.0492 - 0.3937in/μs) |
| Measurement Accuracy <sup>2</sup> |   |   |   |   |
| Pulse Echo (PE)                   | ±0.1mm<br>(0.63-19.99mm)<br>±0.5%<br>(20.00-500.00mm) | ±0.1mm<br>(0.63-19.99mm)<br>±0.5%<br>(20.00-500.00mm) | ±0.05mm (0.63-9.99mm)<br>±0.5% (10.00-500.00mm)<br>±0.004" (0.025-0.393")<br>±0.5% (0.394-20.00") |   |
| Echo Echo ThruPaint™<br>(EE)      |   | ±0.1mm<br>(2.54 - 25.4mm)                             | ±0.05mm (2.54-9.99mm)<br>±0.5% (10.00-25.4mm)<br>±0.004" (0.100-0.393")<br>±0.5% (0.394-0.787")   |   |

|                           |  |
|---------------------------|--|
| Operating Temperature     | -10 to 50°C (14 to 122°F)                                |
| Power Supply              | 2 x AA batteries   |
| Battery Life <sup>3</sup> | Alkaline: 15 hours Lithium: 28 hours                     |
| Gauge Weight              | 210g (7.4oz) - including batteries, without transducer   |
| Gauge Dimensions          | 145 x 73 x 37mm (5.7 x 2.84 x 1.46"), without transducer |

|               |  |
|---------------|--|
| Packing Lists | Elcometer MTG2 Ultrasonic Material Thickness Gauge, 5MHz ¼" right angle dual element transducer, ultrasonic couplant, carry pouch, screen protector, wrist harness, 2 x AA batteries, operating instructions, test certificate & 2 year warranty extension card.   |
|               | Elcometer MTG4 Ultrasonic Material Thickness Gauge, 5MHz ¼" right angle dual element transducer (MTG4-TXC only), ultrasonic couplant, carry pouch, screen protector, wrist harness, 2 x AA batteries, operating instructions, test certificate & 2 year warranty extension card.                             |
|               | Elcometer MTG6 Ultrasonic Material Thickness Gauge, 5MHz ¼" right angle dual element transducer (MTG6DL-TXC only), ultrasonic couplant, plastic transit case, 3 x screen protectors, wrist harness, 2 x AA batteries, operating instructions, calibration certificate, ElcoMaster® software CD & USB cable.  |
|               | Elcometer MTG8 Ultrasonic Material Thickness Gauge, 5MHz ¼" right angle dual element transducer (MTG8BDL-TXC only), ultrasonic couplant, plastic transit case, 3 x screen protectors, wrist harness, 2 x AA batteries, operating instructions, calibration certificate, ElcoMaster® software CD & USB cable. |

• Calibration Certificate supplied as standard.

<sup>1</sup> Dependent on material being measured & transducer being used.

<sup>2</sup> On steel.

<sup>3</sup> Approximate battery life, when in Continuous Reading Mode at a reading rate of 4Hz. Rechargeable batteries may differ.




## Elcometer MTG

## Material Thickness Transducers



The **MTG Transducer range** has intelligent automatic transducer recognition ensuring correct probe identification even when the transducer is changed.



|  |              | Suitable for        |                          |          |            |                       |               |       |       |           |      |      |      |
|---|--------------|---------------------|--------------------------|----------|------------|-----------------------|---------------|-------|-------|-----------|------|------|------|
| Disk  | Part Number  | Transducer Diameter | Transducer Configuration | Damping* | ThruPaint™ | Potted Connector Type | Thin Plastics | Steel | Glass | Aluminium | MTG4 | MTG6 | MTG8 |
| 5.00MHz Dual Element Thickness Transducer   |              |                     |                          |          |            |                       |               |       |       |           |      |      |      |
| ●   | TXC5M00BP-4  | 3/16"               | Right Angle              | S        |            | ●                     | ●             | ●     | ●     |           | ●    | ●    | ●    |
| ●   | TXC5M00CP-4  | 1/4"                | Right Angle              | S        |            | ●                     | ●             | ●     | ●     |           | ●    | ●    | ●    |
| ●   | TXC5M00CP-10 | 1/4"                | Right Angle              | H        | ●          | ●                     | ●             | ●     | ●     |           | ●    | ●    | ●    |
| 7.50MHz Dual Element Thickness Transducer   |              |                     |                          |          |            |                       |               |       |       |           |      |      |      |
| ●   | TXC7M50CP-4  | 1/4"                | Right Angle              | S        |            | ●                     | ●             | ●     | ●     | ●         | ●    | ●    | ●    |
| ●   | TXC7M50CP-6  | 1/4"                | Right Angle              | H        | ●          | ●                     | ●             | ●     | ●     | ●         | ●    | ●    | ●    |

## Elcometer NDT


## Ultrasonic Couplant



Elcometer supplies a viscous gel to work on both horizontal and vertical surfaces. The temperature range for regular couplant is -15 to 104°C (5 to 220°F).

Suitable for use with the Elcometer MTG range.

| Part Number | Description   |
|-------------|---|
| T92015701   | Ultrasonic Couplant; 120ml (4fl oz) bottle            |
| T92015701-5 | Ultrasonic Couplant; 120ml (4fl oz) bottle, pack of 5 |
| T92024034-7 | Ultrasonic Couplant; 300ml (10fl oz) bottle           |
| T92024034-8 | Ultrasonic Couplant; 500ml (17fl oz) bottle           |
| T92024034-3 | Ultrasonic Couplant; 3.8l (1 US Gallon)               |



Each transducer can be easily identified by the disk on the top



Visit [www.elcometer.com](http://www.elcometer.com) for the full range of transducers and couplant

\* Damping: **S** - Standard undamped Transducer, **H** - Highly Damped Transducer.

All transducers are supplied with a calibration certificate. To select another transducer from the one supplied with the gauge please remove TXC from the part number.



meter<sup>®</sup> logo





# Surface Condition

Surface Profile & Roughness

3





**Surface preparation is one of the most important factors in the successful application of a coating or surface treatment and is critical to the effective lifetime of the coating. For any coating to perform it is essential that the substrate is prepared properly.**

Ensuring the correct surface preparation optimises the performance of the coating and material usage. Elcometer supply a range of products to meet each of the key industry standard surface preparation inspection methods, these include;

*Surface Condition:* degree or percentage of rust, level of mill scale, etc., can be visibly assessed using Pictorial Surface Standards. Weld beads can be assessed using a weld comparator and weld gauges.

*Surface Profile:* the degree of profile on the surface affects a coating's overall performance and determines aspects such as adhesion, coverage and overall volume of coatings used.

If the profile is too large the amount of coating required increases, otherwise there is a danger that the peaks remain uncoated - allowing rust spots to occur. If the profile is too small there may be an insufficient key for adequate adhesion.



**Elcometer 128****Pictorial Surface Standards**

Pictorial Surface Standards are high quality photographs which are used for comparison purposes to assess the visual appearance of a steel surface. Elcometer's range of Surface Standards cover most of those required for surface cleanliness. These include:


| Part Number   | Description  |
|---|--|
|  E128----1   | BS EN ISO 8501-1:2007/SIS 055900 - the original visual standard. It shows the degree of cleanliness of different levels of rusted steel cleaned by blasting, hand and power tools and flame, specified by ASTM D2200 Method A  |
|  E128----3   | SSPC (Steel Structures Painting Council) VIS 1 - similar to the Swedish and British Standards, but the pictures of the required final appearances match the written descriptions in the USA Standards. VIS 1-89 includes photographs of surfaces cleaned using metallic and non-metallic abrasives. Specified by ASTM D2200 Method B |
|  E128----5  | SSPC - VIS 3 - contains 44 photographs to supplement the written SSPC specifications for hand and power tool cleaning  |
|  E128----6 | SSPC - VIS 2 Standard method of evaluating the degree of rusting on painted steel surfaces   |
|  E128----7 | SSPC - VIS 4 Guide and reference photographs for steel surfaces prepared by water jetting  |
|  E128----8 | SSPC - VIS 5 Guide and reference photographs for steel surfaces prepared by wet abrasive   |
|  E128----9 | BS EN ISO 8501-4:2020 - preparation of steel substrates before application of paints and related products. Visual assessment of surface cleanliness. Initial surface conditions, preparation grades and flash rust grades in connection with high-pressure water jetting   |

**STANDARDS:**

ASTM D 2200, IMO MSC.215(82), IMO MSC.244(83), ISO 8501-1, SS 55900, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000.

## Elcometer 147

## Weld Gauge

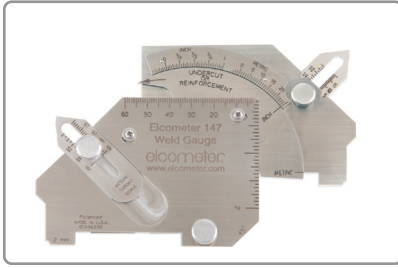

The Elcometer 147 Weld Gauge measures many aspects of welds in both Metric and Imperial units and includes:

- angle of preparation 0 to 60°
- misalignment (high - low)
- fillet weld throat size
- fillet weld length
- 2mm (0.79") edge roundness test
- excess weld metal (capping size)
- depth of undercut
- depth of pitting
- general linear measurements up to 60mm (2")

### Technical Specification

| Part Number                    | Description   |
|--------------------------------|---|
| <b>H147-----1</b>              | Elcometer 147 Weld Gauge                                  |
| Angle of Preparation Scale     | 0 - 60° in 5° divisions                                   |
| Misalignment Scale             | 0 - 25mm in 1mm divisions and 0 - 1" in 1/16" divisions   |
| Fillet Leg & Excess Weld Scale | 0 - 25mm in 1mm divisions and 0 - 1" in 1/16" divisions   |
| Fillet Throat Scale            | 0 - 20mm in 1mm divisions and 0 - 3/4" in 1/16" divisions |
| Undercut Scale                 | 0 - 4mm in 1mm divisions and 0 - 1/4" in 1/16" divisions  |
| Dimensions                     | 100 x 68mm (3.9 x 2.7")                                   |
| Weight                         | 154g (5.4oz)  |
| Packing List                   | Elcometer 147 Weld Gauge and instruction card             |

## Elcometer 119


## Pit Gauge



The Elcometer 119 Pipe Pit Gauge is a pocket size gauge designed to identify the condition of a pipe.

The gauge is placed horizontally on the surface of the pipe and the stylus is positioned into the base of the corrosion pit.

The gauge shows the pit depth compared to the nominal pipe wall thickness. Imperial units only.

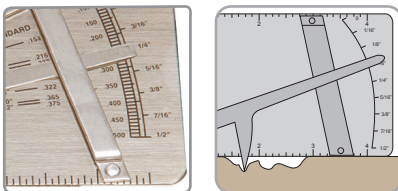

### Technical Specification

| Part Number      | Description                        |
|------------------|------------------------------------|
| <b>E119-----</b> | Elcometer 119 Pipe Pit Gauge       |
| Range            | 0 - 500mils (0 - 0.5")             |
| Graduation       | 10mils and 1/16"                   |
| Dimensions       | 68 x 133 x 4mm (21 x 5.25 x 0.18") |
| Weight           | 227g (8oz)                         |



**Elcometer 999****Weld Comparator****STANDARDS:**

SP0178-2007, RP0178

The Elcometer Surface Weld Comparator provides for the first time, a means of comparing the quality of welds.

Made from durable T Grade ABS plastic, the comparator comprises 14 different examples of actual welds, allowing a thorough evaluation to be completed.

Each Weld Gauge is supplied complete with a copy of the NACE SP0178-2007 Standard, providing detailed recommendations on design, fabrication and surface finish requirements. It includes generic and graphic descriptions of various degrees of surface finishing of welds that may be specified in preparation for the lining of tanks and vessels.

**Technical Specification**

| Part Number | Description                       |
|-------------|-----------------------------------|
| H99921527   | Elcometer Surface Weld Comparator |

**The difference between Surface Profile and Surface Roughness**

Surface Profile; a measure of the depth of a blasted profile.

Surface Roughness; a combination of the depth of the profile and the peak count in a given linear direction.

For any coating to perform successfully, prior to its application, it is important that the required surface profile is created on the substrate.

A digital surface profile gauge measures the peak-to-valley height in terms of the distance between the tip of the needle and the top of the profile (peaks) and the distance between the tip of the needle and the bottom of the profile (valleys). This method can accurately determine a value for average peak-to-valley profile.

### Elcometer 224

### Separate Digital Surface Profile Gauge

The **Elcometer 224** provides the very latest in surface profile measuring technology for measuring profile on either flat or curved surfaces.

#### STANDARDS:

ASTM D 4417-B, SANS 5772,  
SSPC PA 17, US Navy NSI 009-32,  
US Navy PPI 63101-000

Integral & separate probe  
options for flat and  
convex<sup>1</sup> surfaces

USB and Bluetooth® data  
output to ElcoMaster® software,  
see page 12-2

Dust and water resistant rugged  
design equivalent to IP64

Auto rotating display with  
tap awake feature





**Elcometer 224****Separate Digital Surface Profile Gauge****User Friendly**

- Large buttons ideal for gloved hands
- Easy to use menu structure in multiple languages
- High contrast colour LCD with auto rotate
- High and low reading limit indicators
- Factory calibrated for immediate use

**Accurate**

- Can be used in accordance with National and International Standards
- Temperature stable measurements
- Statistics are calculated and displayed in real time
- Live and batch readings graph format for instant analysis

**Reliability**

- Repeatable and reproducible measurements
- 2 year gauge warranty<sup>2</sup>
- Supplied with fully traceable Test Certificates
- Batch & individual readings are date and time stamped

**Tough**

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP64
- Suitable for use in harsh environments
- Scratch and solvent resistant display
- Durable gauge and probe construction

**Efficient**

- Fast reading rate of 50+ per minute
- Integral and separate probe versions to suit your application
- Alpha numeric batch identification
- Compatible with ElcoMaster<sup>®</sup> software and ElcoMaster<sup>®</sup> Mobile App
- Powersave Mode with tap awake

**Powerful**

- User replaceable tough tungsten carbide tip, can be used for up to 20,000 readings
- USB and Bluetooth<sup>®</sup> data output to iPhone<sup>1</sup> or Android<sup>™</sup> devices
- Measures profiles up to 500µm (20mils)



Integral or separate probes measure profiles up to 500µm (20mils)



Ergonomic design for comfort during continuous use




2.4" colour screen provides enhanced reading visibility at all angles

<sup>1</sup> Compatible with iPod, iPhone and iPad.

<sup>2</sup> The Elcometer 224 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

## Elcometer 224

## Separate Digital Surface Profile Gauge

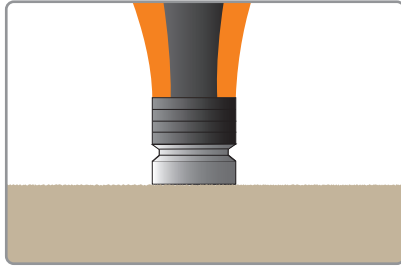


### Flat Surface Profile Probes

Supplied with either standard cables or armoured metal reinforced heavy duty cables, Elcometer surface profile probes are supplied with a glass zero tile, calibration test foils (nominal values 125µm (5.0mils) & 508µm (20mils)) and an Elcometer test certificate.



### Technical Specification

| Range: 0-500µm (0-20mils) |              | Resolution: 1µm (0.1mil) |                         | Accuracy: ±5% or ±5µm (±0.2mil) |  |
|---------------------------|--------------|--------------------------|-------------------------|---------------------------------|--|
| Probe Design              | Part Number  | Minimum Headroom         | Minimum Sample Diameter | Certificate                     |  |
| Flat Surface: Standard    | T224C500US   | 125mm (4.92")            | 25mm (1.0")             | •                               |  |
| Flat Surface: Armoured    | T224C500UARM | 165mm (6.50")            | 25mm (1.0")             | •                               |  |

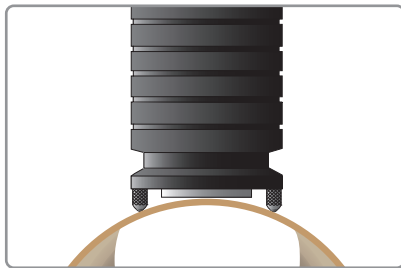

### Convex Surface Profile Probes

Supplied with either standard cables or armoured metal reinforced heavy duty cables, Elcometer convex surface profile probes are supplied with a glass zero tile, calibration test foils (nominal values 125µm (5.0mils) & 508µm (20mils)) and an Elcometer test certificate.



### Technical Specification

| Range: 0-500µm (0-20mils) |               | Resolution: 1µm (0.1mil) |                       | Accuracy: ±5% or ±5µm (±0.2mil) |  |
|---------------------------|---------------|--------------------------|-----------------------|---------------------------------|--|
| Probe Design              | Part Number   | Minimum Headroom         | Minimum Pipe Diameter | Certificate                     |  |
| Convex Surface: Standard* | T224C500UX    | 135mm (5.31")            | 75mm (3.0")           | •                               |  |
| Convex Surface: Armoured* | T224C500UXARM | 175mm (6.89")            | 75mm (3.0")           | •                               |  |

### Accessories

| Part Number    | Description    |  |
|----------------|----------------|--|
| Integral Gauge | Separate Gauge |  |
| T22419793      | T22419793      | Probe Tip Protection Cap   |
| T22420072      | T22420072      | Glass Zero Tile with Wallet  |
| T22421882C     | T22421882C     | Certified Calibration Test Kit:<br>125µm & 500µm (5 & 20mils) Calibration Foils, Glass Zero Tile & Calibration Certificate |
| T99921325      | T99921325      | USB Cable  |
| T99924797      | T99924797      | USB Bluetooth® Adaptor (V2.0+) - for PCs without Bluetooth®  |
| T99922341      | T99922341      | Self Adhesive Screen Protectors (Pack of 10)   |
| T22420053      | T22420053      | Replacement Tip (Pack of 2) with Fixing Tool   |
| T22420095      | T22420095      | Replacement Tip (Pack of 5)  |
| -              | T45622371      | Benchtop Inspection Stand  |

• Test Certificate supplied as standard.  
Elcometer 224 probes are covered by a 1 year warranty

\* Applicable Patents: GB2505193, US9261345



**Elcometer 224****Integral Digital Surface Profile Gauge**

Fast, accurate and user friendly, the **Elcometer 224** is available with or without memory and Bluetooth®.

Review batch data or last 20 readings in a graph format

Time & date stamped measurements

Measurement capability to  $\pm 5\%$

Stores up to 150,000 readings in up to 2,500 alphanumeric batches

Fast reading rate of 50+ readings per minute<sup>1</sup>

Accurate, immediate and repeatable results

User replaceable tough tungsten carbide tips

**STANDARDS:**

ASTM D 4417-B, SANS 5772,  
SSPC PA 17, US Navy NSI 009-32,  
US Navy PPI 63101-000

<sup>1</sup> Up to 25 readings per minute for the convex probe

## Elcometer 224

## Digital Surface Profile Gauge

### Product Features

■ Standard

□ Optional

|   | Model B           | Model T           |
|---|-------------------|-------------------|
| Fast, accurate reading rate; <i>50+ readings per minute</i> <sup>1</sup>                      | ■                 | ■                 |
| Repeatable & reproducible measurements  | ■                 | ■                 |
| Easy to use menu structure; <i>in 30+ languages</i>   | ■                 | ■                 |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>                         | ■                 | ■                 |
| Bright colour screen; <i>with permanent back light</i>  | ■                 | ■                 |
| Scratch & solvent resistant display; <i>2.4" (6cm) TFT</i>                                    | ■                 | ■                 |
| Large positive feedback buttons   | ■                 | ■                 |
| Flat & convex surfaces <sup>2</sup>   | ■                 | ■                 |
| USB power supply; <i>via PC</i>   | ■                 | ■                 |
| Test certificate  | ■                 | ■                 |
| 2 year gauge warranty <sup>3</sup>  | ■                 | ■                 |
| Automatic rotating display; <i>0°, 90°, 180° &amp; 270°</i>                                   | ■                 | ■                 |
| Ambient light sensor; <i>with adjustable auto brightness</i>                                  | ■                 | ■                 |
| Emergency Light Mode  | ■                 | ■                 |
| Gauge software updates <sup>4</sup> ; <i>via ElcoMaster® software</i>                         | ■                 | ■                 |
| Data output   | ■                 | ■                 |
| USB; <i>to computer</i>   | ■                 | ■                 |
| Bluetooth®; <i>to computer, Android™ &amp; iOS<sup>5</sup> devices</i>                        |                   | ■                 |
| On screen statistics  | ■                 | ■                 |
| Number of readings, <i>n</i> ; Mean (average), $\bar{x}$ ; Standard deviation, $\sigma$ ;     | ■                 | ■                 |
| Highest reading, <i>Hi</i> ; Lowest reading, <i>Lo</i> ; Coefficient of variation, <i>CV%</i> |                   |                   |
| High & low limits; <i>definable audible &amp; visual alarms</i>                               |                   | ■                 |
| Number above high limit;  |                   | ■                 |
| Number below low limit;   |                   | ■                 |
| ElcoMaster® software & USB cable  |                   | ■                 |
| Date and time stamp <i>for each reading</i>   |                   | ■                 |
| Replaceable screen protectors   | ■                 | ■                 |
| Protective case   | ■                 | ■                 |
| Plastic transit case  | □                 | ■                 |
| Measurement range   | 0-500µm (20 mils) | 0-500µm (20 mils) |
| On screen calibration instructions; <i>in 30+ languages</i>                                   | ■                 | ■                 |
| Number of batches   |                   | 2,500             |
| Gauge memory; <i>number of readings</i>   | Last 5            | 150,000           |
| Delete last reading   | ■ <sup>6</sup>    | ■                 |
| Limits; <i>user definable audible &amp; visual pass/fail warnings</i>                         |                   | ■                 |
| Gauge (g) or gauge & batch specific (gb) limits   |                   | gb                |
| Batch types; <i>normal, counted average</i>   |                   | ■                 |
| Review, clear & delete batches  |                   | ■                 |
| Copy batches and calibration settings   |                   | ■                 |
| Alpha-numeric batch names; <i>user definable on the gauge</i>                                 |                   | ■                 |
| Fixed Batch Size Mode; <i>with batch linking</i>  |                   | ■                 |
| Trend graph; <i>last 20 readings</i>  |                   | ■                 |
| Review batch graph  |                   | ■                 |

<sup>1</sup> Up to 25 readings per minute for the convex probe    <sup>2</sup> Applicable Patents: GB2505193, US9261345    <sup>3</sup> The Elcometer 224 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). Elcometer 224 probes are covered by a 1 year warranty.    <sup>4</sup> Internet connection required    <sup>5</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.

<sup>6</sup> Up to the last 5 readings can be deleted




**Elcometer 224****Digital Surface Profile Gauge****Model Options**

| Part Number     | Description                 |   | Certificate |
|-----------------|-----------------------------|---|-------------|
| Integral Gauge  | Separate Gauge <sup>1</sup> |   |             |
| <b>E224C-BI</b> | <b>E224C-BS</b>             | Elcometer 224 Model B Digital Surface Profile Gauge | •           |
| <b>E224C-TI</b> | <b>E224C-TS</b>             | Elcometer 224 Model T Digital Surface Profile Gauge | •           |

**Technical Specification**

|                                       |   |                                       |                           |
|---------------------------------------|---|---------------------------------------|---------------------------|
| Display Information                   | 2.4" (6cm) QVGA colour TFT display, 320 x 240 pixels  |                                       |                           |
| Battery Type                          | 2 x AA batteries, rechargeable batteries can also be used   |                                       |                           |
| Battery Life                          | Approximately 24 hours of continuous use at 1 reading per second <sup>2</sup>   |                                       |                           |
| Minimum Headroom                      | Integral:   | 185mm (7.3")                          |                           |
|                                       | Separate:   | See page 3-6                          |                           |
| Gauge Dimensions<br>(h x w x d)       | Integral:   | 168 x 73 x 37mm (5.61 x 2.87 x 1.46") |                           |
|                                       | Separate:   | 141 x 73 x 37mm (5.55 x 2.87 x 1.46") |                           |
| Gauge Weight<br>(including batteries) | Integral:   | 218g (7.69oz)                         |                           |
|                                       | Separate:   | 161g (5.68oz)                         |                           |
| Measurement Range                     | 0-500µm (0-20mils)  |                                       |                           |
| Probe Tip                             | Tungsten carbide tip 60° angle; Tip Radius: 50µm (2mil)   |                                       |                           |
| Operating Temperature                 | -10 to 50°C (14 to 122°F)   | Storage temperature                   | -10 to 60°C (14 to 140°F) |
| Accuracy & Resolution                 | Accuracy <sup>3</sup> : ±5% or ±5µm (±0.2mil); Resolution: 1µm (0.1mil)   |                                       |                           |
| Packing List <sup>4</sup>             | Elcometer 224 gauge, glass zero tile <sup>4</sup> , 2 x calibration foils <sup>4</sup> , wrist harness, plastic transit case (T), protective case, screen protector, probe protection cap <sup>4</sup> , 2 x AA batteries, test certificate, operating instructions, USB cable (T) & ElcoMaster® software (T) |                                       |                           |

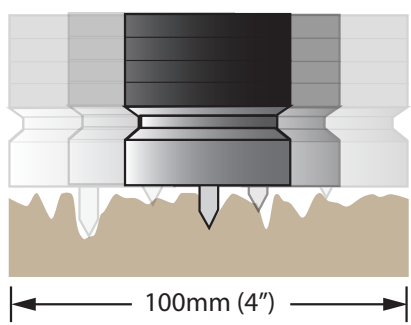**Measuring Surface Profile**

1. Ensure probe is 90° to substrate to ensure accurate readings and calibrate the gauge on a glass zero tile.
2. To take one spot measurement, take either 5 or 10 readings within a 100mm (4") diameter area.
3. The measurement displayed is either the average peak-to-valley height or the maximum reading of the 5 or 10 readings, depending on which measurement mode you have selected.
4. To establish the average surface profile of an area, record 5 spot measurements for each 1m x 1m (3ft x 3ft) area.

<sup>1</sup> Probes are supplied separately, see page 3-8 for details.

<sup>2</sup> Using default settings & lithium batteries, alkaline or rechargeable batteries may differ.

<sup>3</sup> Whichever is the greater.

<sup>4</sup> For separate gauges, the test foils, glass zero tile and probe protection cap are supplied with the separate probe.

• Test Certificate supplied as standard.

### Elcometer

### Digital Inspection Kits



These digital inspection kits have been specifically designed to undertake the three principal inspection requirements in the Protective and Industrial Coatings Industry – climate, surface profile and dry film thickness. The kits come complete with ElcoMaster® software for professional reporting and analysis - ideal for paperless quality assurance systems.

For more information see page 11-3.

#### Technical Specification

| Part Number       | Description                                  |
|-------------------|--|
| YKIT-DIGITAL-B    | Elcometer Basic Digital Inspection Kit (F)   |
| YKIT-DIGITAL-T    | Elcometer Top Digital Inspection Kit (F)     |
| YKIT-DIGITALFNF-B | Elcometer Basic Digital Inspection Kit (FNF) |
| YKIT-DIGITALFNF-T | Elcometer Top Digital Inspection Kit (FNF)   |

### Elcometer 123

### Surface Profile Gauge



The Elcometer 123 Surface Profile Gauge is an easy to use analogue gauge which measures the peak-to-valley height of a blast cleaned surface in a similar way to the Elcometer 224.

#### STANDARDS:

ASTM D 4417-B, SANS 5772,  
SSPC PA 17, US Navy NSI 009-32,  
US Navy PPI 63101-000



#### Technical Specification


| Part Number  | Description  | Certificate |             |
|--------------|--|-------------|-------------|
| E123A--M-    | Elcometer 123 Surface Profile Gauge, Metric  | ○           |             |
| Range        | 0 - 1000µm   | Scale       | 2µm         |
| Dimensions   | 105 x 55 x 25mm (4.1 x 2.2 x 1")   | Weight      | 335g (12oz) |
| Packing List | Elcometer 123 Surface Profile Gauge, glass slide, 2mm Allen key, carry case and operating instructions |             |             |

○ Optional Calibration Certificate available.



## Elcometer 122

## Replica Tape

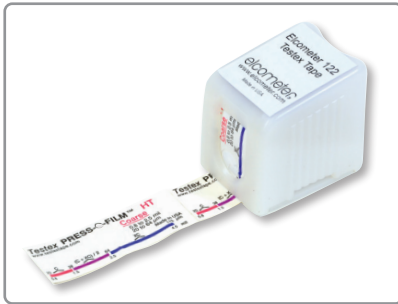

## STANDARDS:

ASTM D 4417-C, BS 7079-C5,  
ISO 8503-5, NACE RP0287,  
SSPC PA 17, US Navy NSI 009-32,  
US Navy PPI 63101-000

Elcometer 122 Testex® Tape consists of foam with a non-compressible backing. The foam side is rubbed into the surface providing a permanent mould of the peak-to-valley profile, which can then be measured using the Elcometer 124 Thickness Gauge.

Elcometer 122 Testex® Tape is available in four profile ranges. It is important that the tape grade chosen is reflective of the profile being measured.

- For profiles between 12 & 25µm (0.5 & 1.0mils): Coarse Minus Tape
- For profiles between 20 & 64µm (0.8 & 2.5mils): Coarse Tape
- For profiles between 38 & 115µm (1.5 & 4.5mils): X-Coarse Tape
- For profiles between 116 & 127µm (4.6 & 5.0mils): X-Coarse Plus Tape

There are 50 tests in each roll.



## Technical Specification


| Description                 | Profile Range |               | 1 Roll    | Part Number |            |             |
|-----------------------------|---------------|---------------|-----------|-------------|------------|-------------|
|                             | Metric        | Imperial      |           | Pack of 10  | Pack of 50 | Pack of 100 |
| Elcometer 122 Coarse Minus  | 12 - 25µm     | 0.5 - 1.0mils | E122---A1 | E122---A10  | E122---A50 | E122---A100 |
| Elcometer 122 Coarse        | 20 - 64µm     | 0.8 - 2.5mils | E122---B1 | E122---B10  | E122---B50 | E122---B100 |
| Elcometer 122 X-Coarse      | 38 - 115µm    | 1.5 - 4.5mils | E122---C1 | E122---C10  | E122---C50 | E122---C100 |
| Elcometer 122 X-Coarse Plus | 116 - 127µm   | 4.6 - 5.0mils | E122---F1 | E122---F10  | E122---F50 | E122---F100 |

## Accessories


T12222498

Swizzle Sticks (Pack of 5)


## How to take a reading using the Testex® Replica Tape

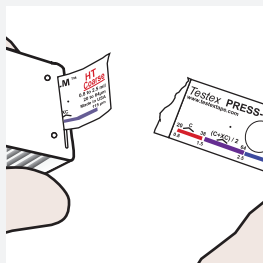


1. Tear off one section of the tape from the roll, peel off the backing tape and retain the back if required for future use.

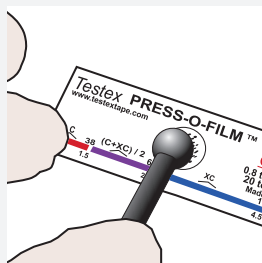


2. Stick the tape on to the test surface, and rub the central portion using the swizzle stick, or the end of a pen, pencil or similar rounded object until dark spots appear. This gives a surface replica.

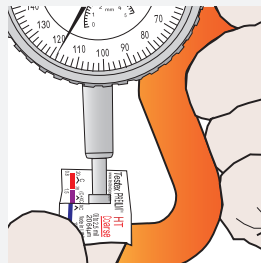

3. Using a micrometer such as the Elcometer 124 Thickness Gauge, measure the thickness of the central portion of the tape replica and subtract 50µm (2mils) from the reading. This result is the peak-to-valley profile height. Write the value on the tape.

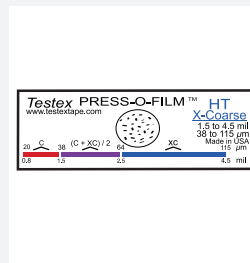

4. If the value falls within the purple band on the coarse tape (38-64µm) then repeat the test as shown in step 2 using the extra coarse tape and then average the two values.

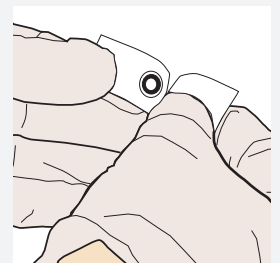

5. If the tape is required for future reference, replace the backing tape to preserve the imprinted profile.

### Elcometer 124

### Thickness Gauge



The Elcometer 124 Thickness Gauge is used to measure the peak-to-valley height of a surface profile moulded in the Elcometer 122 Testex® Replica Tape.

- Metric and Imperial versions available
- Quick and easy to use
- Anvil pressure as required in the Standards

#### STANDARDS:

ASTM D 4417-C, ISO 8503-5,  
NACE RP 0287, SSPC PA 17,  
US Navy NSI 009-32,  
US Navy PPI 63101-000



#### Technical Specification

| Part Number | Description            | Range     | Dimensions       | Weight | Scale Resolution | Certificate |
|-------------|------------------------|-----------|------------------|--------|------------------|-------------|
| E124---3M   | Elcometer 124 Metric   | 0 - 5mm   | 120 x 95 x 25mm  | 254g   | 2µm              | ○           |
| E124---3E   | Elcometer 124 Imperial | 0 - 0.25" | 4.7 x 3.7 x 1.0" | 9oz    | 0.1mil           | ○           |

### Elcometer 125

### Surface Comparators



These extremely durable comparators allow the estimation of surface profile of either grit or shot blasted surfaces. Using the Elcometer 125 Surface Comparators as a reference the blasted profile can be compared to the four reference profile grades in each comparator. Profiles are recorded in microns.

- 4 Profile Values per Comparator

#### STANDARDS:

AS 3894.5, ASTM D 4417-A,  
IMO MSC.215(82), IMO MSC.244(83),  
ISO 8503-1, ISO 8503-2,  
SSPC PA 17

#### Technical Specification

| Part Number | Description                       | Section Profiles   |
|-------------|-----------------------------------|--------------------|
| E125----1   | Elcometer Grit Surface Comparator | 25, 60, 100, 150µm |
| E125----2   | Elcometer Shot Surface Comparator | 25, 40, 70, 100µm  |

○ Optional Calibration Certificate available.



**Elcometer 127****Keane-Tator Surface Comparators & Magnifier****STANDARDS:**

AS 3894.5, ASTM D 4417-A,  
SSPC PA 17

The Elcometer 127 range of Surface Comparators are available in sand, shot or grit surface profiles. Each comparator is supplied with 5 profile grades ranging from 0.5 - 5.5mils. Designed for use with the Elcometer 127 illuminated magnifier, each comparator has a hole in the centre allowing for clear visual comparisons to be made.

- 5 Profile Values per Comparator

**Technical Specification**

| Part Number | Description   | Section Profiles        |
|-------------|---|-------------------------|
| E127----2   | Elcometer 127 Sand Surface Comparator                                 | 0.5, 1, 2, 3, 4mils     |
| E127----3   | Elcometer 127 Grit Surface Comparator                                 | 1.5, 2, 3, 4.5, 5.5mils |
| E127----4   | Elcometer 127 Shot Surface Comparator                                 | 2, 2.5, 3, 4, 5.5mils   |
| E127----1   | Illuminated magnifier (x 5) with integrated surface comparator holder |                         |

**Elcometer 129****Rubert & Rugotest Surface Comparators****STANDARDS:**

AS 3894.5

The Elcometer 129 Surface Comparators are available in two models:

- Elcometer 129 Rubert - available in grit and shot versions
- Elcometer 129 Rugotest - shot and grit profiles on the same block

Roughness is displayed in both “classes” and “roughness averages” for easier identification. Available in Metric only.

- 6 Roughness Values per Comparator

**Technical Specification**

| Part Number | Description   | Section Profiles   |
|-------------|---|--|
| E129----1   | Elcometer 129/1 Rubert Grit Surface Comparator          | 0.4, 0.8, 1.6, 3.2, 6.3, and 12.5µm  |
| E129----2   | Elcometer 129/2 Rubert Shot Surface Comparator          | 0.4, 0.8, 1.6, 3.2, 6.3, and 12.5µm  |
| E129----3   | Elcometer 129/3 Rugotest Shot & Grit Surface Comparator | N6, N7, N8, N9, N10 and N11 equivalent to 0.8, 1.6, 3.2, 6.3, 12.5, and 25µm roughness averages respectively |






A large red industrial vessel, possibly a ship or offshore platform, is shown against a clear blue sky. The vessel has a white superstructure at the top. Scaffolding is visible on the side of the red hull, and a crane is in the background. The text "Surface Cleanliness" is overlaid in a white box on the right side.

# Surface Cleanliness

4

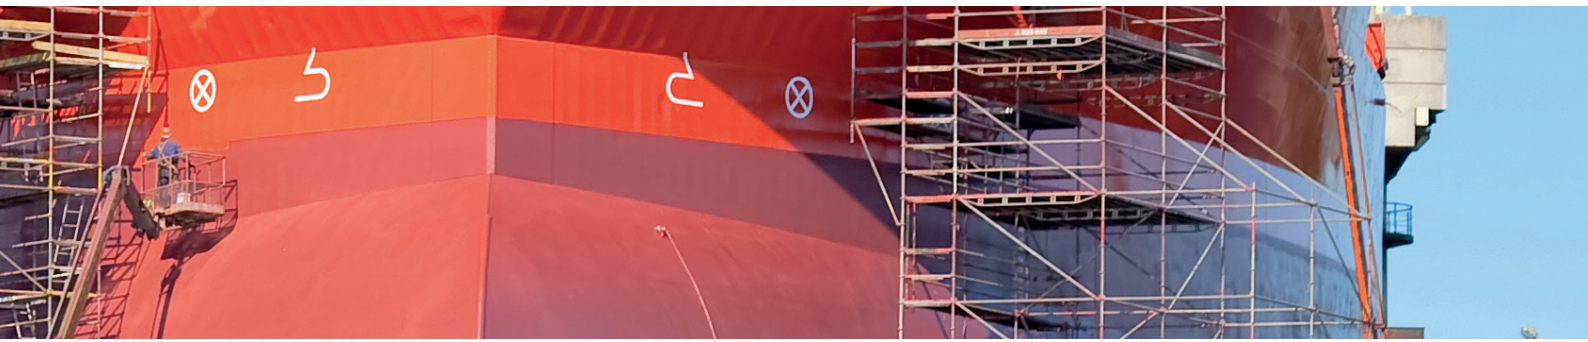

**Surface preparation is one of the most important factors in the successful application of a coating or surface treatment and is critical to the effective lifetime of the coating. For any coating to perform it is essential that the substrate is prepared properly.**

Ensuring the correct surface preparation optimises the performance of the coating and material usage. Elcometer supply a range of products to meet each of the key industry standard surface preparation inspection methods, these include;

*Surface Cleanliness:* soluble salts & ion specific contamination (sulphates, chlorides, nitrates, etc.) which are often invisible to the eye, together with amine blush (for amine cured epoxy coatings) can result in premature coating failure, resulting in high re-coating and maintenance costs. Elcometer has a range of test equipment for assessing surface cleanliness prior to applying a coating.



**Elcometer 130 SSP****Soluble Salt Profiler**

The **Elcometer 130** Soluble Salt Profiler provides fast and accurate measurement of the level and density of soluble salts - over 4 times faster than other Bresle equivalent methods.

**BRESLE EQUIVALENT**  
ISO 8502-9 TEST METHOD

Stores up to 3,500 sets of readings in 1,000 alpha numeric batches

[www.elcometer.com](http://www.elcometer.com)

Large colour LCD screen displays readings in  $\mu\text{g}/\text{cm}^2$ , ppm,  $\mu\text{S}/\text{cm}$ ,  $\text{mS}/\text{cm}$ , % salinity or  $\text{mg}/\text{m}^2$

Range of measurement modes:

- Cleanliness
- Bresle Method Equivalency
- Elcometer 130 Equivalency
- Conductivity

Multi-point conductivity sensor allows the trend in conductivity to be displayed as a density map

Automatic temperature compensation ensures accurate results

Non-oxidising gold plated contacts ensure lifetime performance

**STANDARDS:**

SSPC Guide 15, NSI 009-32



## Elcometer 130 SSP

## Soluble Salt Profiler

### Four Bresle equivalent readings in 2½ minutes

Each filter paper is the size of four Bresle patches - the Elcometer 130 Soluble Salt Profiler not only displays the individual reading, but also provides four Bresle equivalent readings in just over two minutes.



Large Single Reading




Four Bresle Patch Equivalent Readings



Pass/Fail to User Defined Limits



2D Salt Density Map with High/Low Readings

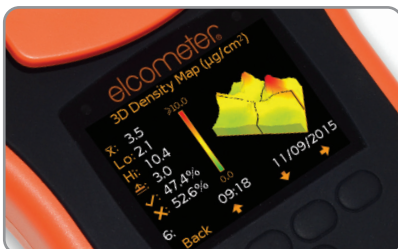

3D Salt Density Profile & Peak Salt Concentration (Hi)

### Detailed analysis

In addition to soluble salt levels (cleanliness) or conductivity, the Elcometer 130 SSP carries out a detailed analysis of the test area - providing an accurate salt density profile map, pinpointing areas of high contamination outside user defined limits.

### Accurate in all environments

The Elcometer 130 SSP has automatic temperature compensation ensuring accuracy in all climatic conditions. Impure water can be offset for accurate and repeatable readings.

### Designed to last

Robust, durable & water resistant, the Elcometer 130 SSP is available with a 2 year manufacturer's warranty; giving you peace of mind.

### Generate instant reports with ElcoMaster® software

The Elcometer 130 SSP wirelessly transmits readings, statistics and batches via Bluetooth® or via USB straight into an inspection application or into ElcoMaster® software, Elcometer's Mobile App, for instant report generation at your desk, or using your mobile in the field.



**Elcometer 130 SSP****Soluble Salt Profiler**

## How to use the Elcometer 130 Soluble Salt Profiler

**Step 1**

Wearing clean disposable gloves (supplied), fill a syringe with precisely 1.6ml of pure distilled water.

**Step 2**

Using tweezers, remove a filter paper from the pack and place it on the cleaned, non-labelled side of the magnetic disc supplied.

**Step 3**


Disperse the water from the syringe, evenly across the whole of the filter paper and remove any bubbles from under the paper.

**Step 4**


Place the magnetic disc, wetted face down, on to the area under test, pressing firmly into any contours or irregularities and start the 2 minute timer on the gauge.

**Step 5**

After two minutes, carefully remove the filter paper and magnetic disc from the test surface and place on to the measurement electrodes.

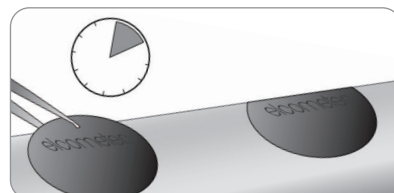**Step 6**

As each filter paper remains on the surface for two minutes, multiple tests can be undertaken at the same time, reducing inspection times further.

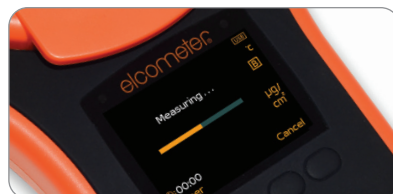**Step 7**

Close the lid, ensuring that the magnetic catch is fully engaged, the gauge will begin measuring.

**Step 8**

The reading will be displayed on screen in the chosen display mode.


**Step 9**

If required for further analysis, place the filter paper in a resealable bag (supplied).

## Elcometer 130 SSP

## Soluble Salt Profiler

### Product Features

|  |                        | Model SSP              |
|--|------------------------|------------------------|
| Repeatable & reproducible measurements   |                        | ■                      |
| Easy to use menu structure; <i>in 30+ languages</i>  |                        | ■                      |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>  |                        | ■                      |
| Bright colour screen; <i>with permanent backlight</i>  |                        | ■                      |
| Scratch & solvent resistant display; <i>2.4" (6cm) TFT</i>   |                        | ■                      |
| 2 year gauge warranty <sup>1</sup>   |                        | ■                      |
| USB power supply; <i>via PC</i>  |                        | ■                      |
| Calibration certificate  |                        | ■                      |
| Calibration Verification Mode <i>(with optional certified calibration tile)</i>  |                        | ■                      |
| Ambient light sensor; <i>with adjustable auto brightness</i>   |                        | ■                      |
| Emergency Light Mode   |                        | ■                      |
| Magnetic & tripod mounting points  |                        | ■                      |
| Data output, USB to PC & Bluetooth to PC, Android™ & iOS <sup>2</sup> devices  |                        | ■                      |
| On screen statistics   |                        |                        |
| Number of readings ( <i>n</i> ); Mean/Average, ( $\bar{x}$ ); Standard deviation ( $\sigma$ );   |                        |                        |
| Highest reading/Peak salt concentration ( <i>Hi</i> ); Lowest reading ( <i>Lo</i> );   |                        | ■                      |
| Coefficient of variation ( <i>CV%</i> ); Number of readings above high limit (  ) |                        |                        |
| Gauge memory   |                        |                        |
| Number of individual reading sets; <i>including salt density, pass/fail map &amp; distribution graph</i>   |                        | 3,500                  |
| Number of batches  |                        | 1,000                  |
| Measurement units & range  |                        |                        |
| Surface Cleanliness - Elcometer 130 Mode   | 0-50µg/cm <sup>2</sup> | 0-500mg/m <sup>2</sup> |
| Surface Cleanliness - Bresle Equivalent Method Mode  | 0-15µg/cm <sup>2</sup> | 0-150mg/m <sup>2</sup> |
| Conductivity   | 0-6000µS/cm            | 0-6mS/cm               |
|  | 0-3000ppm              | 0-0.3% Salinity        |
| Resolution   |                        |                        |
| Surface Cleanliness  | 0.1µg/cm <sup>2</sup>  | 1mg/m <sup>2</sup>     |
| Conductivity   | 1µS/cm                 | 0.001mS/cm             |
|  | 1ppm                   | 0.0001% Salinity       |
| Gauge Accuracy   |                        | ±1% of reading         |
| Measurement mode   |                        |                        |
| Surface Cleanliness  |                        | ■                      |
| Conductivity   |                        | ■                      |
| Calibration Offset Mode  |                        | ■                      |
| Automatic temperature compensation   |                        | ■                      |
| ElcoMaster® software & USB cable   |                        | ■                      |
| Individual reading and profile map stored with time and date   |                        | ■                      |
| Plastic transit case   |                        | ■                      |
| Alpha-numeric batch names; <i>user definable on the gauge</i>  |                        | ■                      |
| Fixed Batch Size Mode; <i>with batch linking</i>   |                        | ■                      |
| Delete last reading  |                        | ■                      |
| Limits; <i>(gauge &amp; batch specific)</i>  |                        | ■                      |
| Review, copy, clear & delete batches & calibration settings  |                        | ■                      |
| Trend graph; <i>last 20 readings</i>   |                        | ■                      |
| Batch review graph   |                        | ■                      |
| Analogue bar graph   |                        | ■                      |

<sup>1</sup> The Elcometer 130 SSP is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>2</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.



**Elcometer 130 SSP****Soluble Salt Profiler****Technical Specification**

| Model           | Description  | Certificate |
|-----------------|--|-------------|
| <b>E130-SP</b>  | Elcometer 130 Soluble Salt Profiler <sup>1</sup>   |             |
| <b>E130-SPC</b> | Elcometer 130 Certified Soluble Salt Profiler <sup>1</sup>   | ●           |
| Operating Range | 5°C - 40°C (41°F - 104°F)  |             |
| Power Supply    | 4 x AA batteries or via USB<br>(rechargeable batteries can also be used)   |             |
| Battery Life    | Alkaline: Approximately 30 hours<br>Lithium: Approximately 45 hours  |             |
| Sample Time     | 2 minutes  |             |
| Sampling Size   | 110mm (4.3") circle  |             |
| Dimensions      | 250 x 145 x 50mm (9.8 x 5.7 x 1.9")  |             |
| Weight          | 780g (1.72lb)  |             |
| Standards       | <b>SSPC Guide 15 (Bresle Equivalent ISO 8502-9 Test Method), NSI 009-32</b>  |             |
| Packing List    | Elcometer 130 Soluble Salt Profiler, 3 x magnetic discs, 100 x high purity test papers, 250ml (8.5fl oz) pure distilled water, 20 x PVC storage bags, disposable gloves, sensor wipes, 3 x 3.0ml (0.1fl oz) syringes, 2 x plastic tweezers, 4 x AA batteries, shoulder strap, plastic transit case, test certificate and operating instructions, USB cable, ElcoMaster® software |             |

**Accessories**

|                  |   | Certificate |
|------------------|---|-------------|
| <b>T13027115</b> | Calibration Verification Tile                                     | ●           |
| <b>T13025964</b> | Magnetic Discs (x3)   |             |
| <b>T13024091</b> | 3.0ml / 0.1fl oz Syringe (x3)                                     |             |
| <b>T13024093</b> | Self Seal Polythene Bags (x20)                                    |             |
| <b>T99911344</b> | Pure Distilled Water - 250ml (8.5fl oz) Bottle with 3ml syringe   |             |
| <b>T13027596</b> | Pure Distilled Water - 1000ml (33.8fl oz) Bottle with 3ml syringe |             |
| <b>T13024094</b> | High Purity Test Papers (x100)                                    |             |
| <b>T13024092</b> | Disposable Vinyl Gloves (x20)                                     |             |
| <b>T13024098</b> | Plastic Tweezers (x2)   |             |
| <b>T13024087</b> | Box of 72 Sensor Wipes  |             |
| <b>T99920130</b> | USB Bluetooth® Adaptor V2.1+                                      |             |

**Calibration verification - peace of mind**

A Calibration Verification Tile is available for verifying the accuracy of the gauge whilst out in the field and the verification date is recorded for use in reports.



● Calibration Certificate supplied as standard.

<sup>1</sup>Applicable Patents: GB 2527766

## Elcometer 130 SSP

## Soluble Salt Profiler

### Bresle Patch Equivalence

Tested under laboratory conditions in accordance with ISO 8502-9, the Elcometer 130 SSP provides equivalent measurements to the Bresle Patch Method.

To show equivalency of measurement between the Bresle Method and the Elcometer 130 SSP it is essential that all parameters are identical except the gauges under test.

For equivalency to be established, both gauges should read a similar value, taking into account the accuracy and resolution of each test.

#### TEST METHOD

Working with the School of Materials at the University of Manchester (UK) an automated, repeatable and reproducible doping method was developed to apply a known salt concentration uniformly over a large panel.

Over 200 individual tests were undertaken across a range of concentrations and blast profiles.


#### Nominal steel grit blast profiles

- Smooth <25µm (1.0mils)
- 25 to 50µm (1.0 to 2.0mils)
- 50 to 75µm (2.0 to 3.0mils)
- 75 to 150µm (3.0 to 6.0mils)

#### Surface salt concentration levels

- 15mg/m<sup>2</sup> to 25mg/m<sup>2</sup>
- 25mg/m<sup>2</sup> to 35mg/m<sup>2</sup>
- 35mg/m<sup>2</sup> to 45mg/m<sup>2</sup>
- 45mg/m<sup>2</sup> to 55mg/m<sup>2</sup>
- >55 mg/m<sup>2</sup>

Testing was undertaken under strict laboratory conditions, with each method tested in accordance with the manufacturer's instructions.

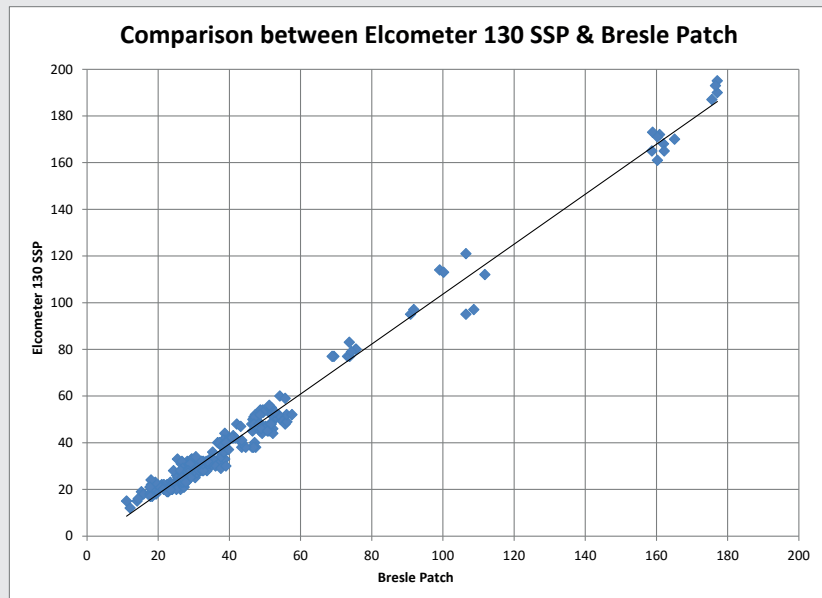

#### RESULTS

***“The Elcometer 130 SSP measurement equivalency is less than 0.46µg/cm<sup>2</sup> across all concentrations on smooth and blasted substrates, almost half the background contamination of a Bresle Patch.”***

The Elcometer 130 SSP has undergone extensive side by side comparison testing against the Bresle Test Patch Method.

Background (inherent) contamination within the Bresle Test Patch has shown that the Bresle Test Patch has a background contamination range of 0.88µg/cm<sup>2</sup> (8.8mg/m<sup>2</sup>).

The variation in readings between the Elcometer 130 SSP and the Bresle Test Method are significantly within the background contamination range of the Bresle Patches (0.88µg/cm<sup>2</sup>); being less than 0.41µg/cm<sup>2</sup> for concentrations below 8.0µg/cm<sup>2</sup>, and less than 0.46µg/cm<sup>2</sup> across concentrations below 16.5µg/cm<sup>2</sup>.

For a copy of the full report and analysis visit [www.elcometer.com](http://www.elcometer.com)



**Elcometer 130****Salt Contamination Meter**

The **Elcometer 130** quickly and accurately measures the level of soluble salts on surfaces over 4 times faster than Bresle equivalent test methods.

Non-oxidising gold plated contacts ensures lifetime accuracy

Fast reading rate allows multiple tests to be completed efficiently

Pressure plate ensures a constant and uniform pressure to paper

Automatic temperature compensation ensures accurate results

Stores up to 100,000 readings in 1,000 alpha numeric batches

Dust and water resistant rugged design equivalent to IP64

**STANDARDS:**  
SSPC Guide 15



Measures on flat and convex surfaces

**2 YEAR\***  
WARRANTY

### Elcometer 130

### Salt Contamination Meter

#### User Friendly

- Large buttons ideal for gloved hands
- Easy to use menu structure in multiple languages
- High reading limit indicator
- Factory calibrated for immediate use

#### Accurate

- Conductivity measurement to  $\pm 1\%$
- Can be used in accordance with National and International Standards
- Automatic temperature compensation ensures repeatable, accurate results
- Calibration verification tiles
- Trend and batch readings graph format for instant on screen analysis

#### Reliable

- Repeatable and reproducible measurements
- 2 year gauge warranty<sup>1</sup>
- Supplied with fully traceable Test Certificates
- Batch & individual readings are stored with date and time stamp

#### Tough

- Heavy duty, impact resistant, dust and waterproof design equivalent to IP64
- Wipe clean sealed unit ideal for harsh environments
- Scratch and solvent resistant display

#### Efficient

- Instant readings allows multiple tests to be completed efficiently
- Alpha numeric batch identification
- Compatible with ElcoMaster® software and ElcoMaster® Mobile App
- Calibration offset allows the use of non-pure water up to  $2\mu\text{g}/\text{cm}^2$

#### Powerful

- Measuring range up to  $50\mu\text{g}/\text{cm}^2$  (3000ppm)
- USB and Bluetooth® data output to iPhone<sup>2</sup> or Android™ devices
- Stores up to 100,000 readings in 1,000 batches
- Soluble salt and conductivity meter in one gauge



<sup>1</sup> The Elcometer 130 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>2</sup> Compatible with iPod, iPhone and iPad.



## Elcometer 130

## Salt Contamination Meter

| Product Features   |  | ■ Standard | □ Optional  |
|--|--|------------|---|
|  |  | Model S    | Model T   |
| Repeatable & reproducible measurements   |  | ■          | ■   |
| Easy to use menu structure; <i>in 30+ languages</i>  |  | ■          | ■   |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>  |  | ■          | ■   |
| Bright colour screen; <i>with permanent backlight</i>  |  | ■          | ■   |
| Scratch & solvent resistant display; 2.4" (6cm) TFT  |  | ■          | ■   |
| 2 year gauge warranty <sup>1</sup>   |  | ■          | ■   |
| USB power supply; <i>via PC</i>  |  | ■          | ■   |
| Calibration certificate  |  | ■          | ■   |
| Calibration Verification Mode <i>(with optional certified calibration tiles)</i>   |  | ■          | ■   |
| Ambient light sensor; <i>with adjustable auto brightness</i>   |  | ■          | ■   |
| Emergency Light Mode   |  | ■          | ■   |
| Magnetic & tripod mounting points  |  | ■          | ■   |
| Gauge software updates; <i>via ElcoMaster® software</i>  |  | ■          | ■   |
| Data output  |  |            |   |
| USB; <i>to computer</i>  |  | ■          | ■   |
| Bluetooth®; <i>to computer, Android™ &amp; iOS<sup>2</sup> devices</i>   |  |            | ■   |
| ElcoMaster® software & USB cable   |  | □          | ■   |
| On screen statistics   |  |            | ■   |
| Number of readings ( <i>n</i> ); Mean (average) ( $\bar{x}$ ); Standard deviation ( $\sigma$ );<br>Highest reading ( <i>Hi</i> ); Lowest reading ( <i>Lo</i> ); Coefficient of variation(CV%);<br>Number of readings above high limit ( $\frac{\sum}{n}$ ) |  |            | ■   |
| Gauge memory   |  |            | ■   |
| Number of readings   |  |            | 100,000   |
| Number of batches  |  |            | 1,000   |
| Measurement units & range  | µg/cm <sup>2</sup><br>ppm<br>µS/cm<br>mS/cm<br>% Salinity<br>mg/m <sup>2</sup> | 0-25       | 0-50<br>0-3000<br>0-6000<br>0-6<br>0-0.3<br>0-500 |
| Measurement mode   |  |            |   |
| Surface cleanliness  |  | ■          | ■   |
| Conductivity   |  |            | ■   |
| Calibration Offset Mode  |  | ■          | ■   |
| Automatic temperature compensation   |  | ■          | ■   |
| Individual reading stored with date & time   |  |            | ■   |
| Plastic transit case   |  | ■          | ■   |
| Alpha-numeric batch names; <i>user definable on the gauge</i>  |  |            | ■   |
| Fixed Batch Size Mode; <i>with batch linking</i>   |  |            | ■   |
| Delete last reading  |  |            | ■   |
| Limits; <i>user definable audible &amp; visual pass/fail warnings</i>  |  |            | ■   |
| Review, copy, clear & delete batches & calibration settings  |  |            | ■   |
| Trend graph; <i>last 20 readings</i>   |  |            | ■   |
| Batch review graph   |  |            | ■   |
| Analogue bar graph   |  |            | ■   |

<sup>1</sup> The Elcometer 130 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). <sup>2</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.

## Elcometer 130

## Salt Contamination Meter

## Technical Specification

| Model S              | Model T   | Description                                      | Certificate   |
|----------------------|---|--|---|
| E130-S               | E130-T  | Elcometer 130 Salt Contamination Meter           |   |
| E130-SC              | E130-TC   | Elcometer 130 Certified Salt Contamination Meter | ●   |
|                      |   | Model S  | Model T   |
| Measurement Range    |   | 0-25µg/cm <sup>2</sup>                           | 0-50µg/cm <sup>2</sup> ; 0-500mg/m <sup>2</sup> ; 0-6000µS/cm; 0-6mS/cm; 0-3000ppm; 0-0.3% Salinity |
| Resolution           |   | 0.1µg/cm <sup>2</sup>                            | 0.1µg/cm <sup>2</sup> ; 1mg/m <sup>2</sup><br>1µS/cm; 0.001mS/cm<br>1ppm; 0.0001% Salinity          |
| Measurement Accuracy | ±1% of reading ±0.1µg/cm <sup>2</sup>   | Operating Range                                  | 5°C - 40°C (41°F - 104°F)   |
| Power Supply         | 4 x AA batteries (rechargeable batteries can also be used), or power via USB  |  |   |
| Number of Tests      | Approximately 4,000 measurements before battery replacement   |  |   |
| Sample Time          | 2 minutes   | Sampling Size                                    | 110mm (4.3") diameter circle  |
| Dimensions           | 250 x 145 x 50mm (9.8 x 5.7 x 1.9")   | Weight   | 780g (1.72lb)   |
| Packing List         | Elcometer 130 Salt Contamination Meter, 3 x magnetic discs, 100 x high purity test papers, 250ml (8.5fl oz) pure distilled water, 20 x PVC storage bags, disposable gloves, sensor wipes, 3 x 3ml (0.1fl oz) syringes, 2 x plastic tweezers, 4 x AA batteries, shoulder strap, plastic transit case, test certificate and operating instructions, USB cable (T), ElcoMaster® software (T) |  |   |

## Accessories

|           |   | Certificate |
|-----------|---|-------------|
| T13023980 | Calibration Verification Tiles, Set of 3                          | ●           |
| T13024091 | 3ml / 0.1fl oz Syringe (x3)                                       |             |
| T99922341 | Pack of 10 Display Screen Protectors                              |             |
| T13024093 | Box of 20 Self Seal Polythene Bags                                |             |
| T99911344 | Pure Distilled Water - 250ml (8.5fl oz) Bottle with 3ml syringe   |             |
| T13027596 | Pure Distilled Water - 1000ml (33.8fl oz) Bottle with 3ml syringe |             |
| T13024094 | Box of 100 High Purity Test Papers                                |             |
| T13024092 | Box of 20 Disposable Vinyl Gloves                                 |             |
| T13024098 | Plastic Tweezers (x2)   |             |
| T13024087 | Box of 72 Sensor Wipes  |             |
| T13025964 | Magnetic Discs (x3)   |             |
| T99921325 | USB Cable   |             |

● Calibration certificate supplied as standard



**Elcometer 135C****Elcometer Bresle Test Patches**

The Elcometer 135C Bresle Test Patch determines the concentration of soluble salts on uncoated surfaces in accordance with the ISO 8502-6 test method.

Elcometer Bresle Test Patches are also available as part of the Elcometer 138 Bresle Salt Kit.

**STANDARDS:**

ISO 8502-6

**Technical Specification**

| Part Number         | Description   | Certificate   |               |
|---------------------|---|---------------|---------------|
| <b>E135----C25</b>  | Elcometer 135C Bresle Test Patch (Box of 25)              | ●             |               |
| <b>E135----C100</b> | Elcometer 135C Bresle Test Patch (Box of 100)             | ●             |               |
| Test Area           | 1250mm <sup>2</sup> , 12.5cm <sup>2</sup> (1.93sq inches) | Sample Volume | 2.6ml ± 0.6ml |
| Dimensions          | 50 x 50mm (1.97 x 1.97")                                  |               |               |

**Elcometer 135B****Bresle Patches**

Elcometer 135B Original Bresle Patches are used to determine surface chloride contamination and are self-adhesive rubber film patches with a sealed compartment for sampling soluble impurities using a suitable solvent, from steel surfaces.

Elcometer 135B Bresle Patches can also be used with the Elcometer 138C Bresle Salt Kit.

**STANDARDS:**

ISO 8502-6

**Technical Specification**

| Part Number      | Description                   |            |   |
|------------------|-------------------------------|------------|---|
| <b>E135----B</b> | Elcometer 135B Bresle Patches |            |   |
| Tests per Kit    | 25                            | Test Area  | 1250mm <sup>2</sup> , 12.5cm <sup>2</sup> (1.93sq inches) |
| Sample Volume    | 2.6ml ± 0.6ml                 | Dimensions | 52 x 52mm (2.0 x 2.0")                                    |

- Certificate of Cleanliness & Test Area available at [www.elcometer.com/cert](http://www.elcometer.com/cert)  
Bresle Patch is a Trade Mark of SP Sveriges Tekniska Forskningsinstitut AB

## Elcometer 138

## Bresle Salt Kit



It is essential that the level of contaminants on a surface is measured prior to application of the coating to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly re-coating and high maintenance costs.

The Elcometer 138 Bresle Kits include the Elcometer 138 Bresle Salt Meter. This lightweight, portable meter measures the conductivity of the test sample using a single drop, then automatically converts this to show the density of salts, negating the need for the user to do a manual calculation when working in accordance with ISO 8502-6 or ISO 8502-9.

### STANDARDS:

AS 3894.6-A, IMO MSC.215 (82),  
IMO MSC.244 (83), ISO 8502-6,  
ISO 8502-9, SSPC Guide 15,  
US Navy NSI 009-32,  
US Navy PPI 63101-000

### Technical Specification

| Part Number       | Description  | Certificate            |
|-------------------|--|------------------------|
| E138-1C           | Elcometer 138 Bresle Salt Kit with Elcometer 138 Bresle Salt Meter and Elcometer 135C Bresle Test Patches  | •                      |
| E138-1C-CM        | Elcometer 138 Bresle Salt Kit with Elcometer 138 Conductivity Meter and Elcometer 135C Bresle Test Patches   | •                      |
| E138-1            | Elcometer 138 Bresle Salt Kit with Elcometer 138 Bresle Salt Meter and Elcometer 135B Bresle Patches   |                        |
| E138-1-CM         | Elcometer 138 Bresle Salt Kit with Elcometer 138 Conductivity Meter and Elcometer 135B Bresle Patches  |                        |
| Measurement Range | E138-1, E138-1C: ISO Mode: 0 - 2399µg/cm <sup>2</sup> IMO Mode : 0 - 2199µg/cm <sup>2</sup><br>E138-1-CM, E138-1C-CM: 0 - 19.99mS/cm   |                        |
| Accuracy*         | ±2% full scale (for each range)  |                        |
| Dimensions        | 393 x 331 x 95mm (15.5 x 13 x 3.7")  | Weight 1.4kg (3lb 1oz) |
| Packing List      | Box of 25 Elcometer 135C Bresle Test Patches (E138-1C) or Elcometer 135B Bresle Patches (E138-1), Elcometer 138 Bresle Salt Meter (E138-1C or E138-1) or Elcometer 138 Conductivity Meter (E138-1-CM or E138-1C-CM) & Sensor, 250ml (8.45fl oz) bottle of standard 84µS/cm calibration solution with certificate, 14ml (0.47fl oz) bottle of conditioning solution, 250ml (8.5fl oz) bottle of pure water, 3 x 5ml (0.17fl oz) syringes, 3 x blunt needles, 30ml (1fl oz) plastic beaker, 2 x CR2032 batteries (supplied fitted to the Elcometer 138), transit case and user guide |                        |

### Accessories

|              |   |           |   |
|--------------|---|-----------|---|
| E135----B    | Elcometer 135B Bresle Patches (Box of 25)                         |           |   |
| E135----C25  | Elcometer 135C Bresle Test Patch (Box of 25)                      |           |   |
| E135----C100 | Elcometer 135C Bresle Test Patch (Box of 100)                     |           |   |
| T13830629-1  | Standard 84µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle   |           |   |
| T13830629-2  | Standard 1413µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle |           |   |
| T13827259    | Pure Water - 250ml (8.5fl oz) Bottle                              |           |   |
| T13818517    | 3 x 5ml (0.17fl oz) Syringes                                      | E138-BSM  | Elcometer 138 Bresle Salt Meter                               |
| T13818518    | 3 x Needles   | E138-CM   | Elcometer 138 Conductivity Meter                              |
| T13818519    | Plastic Beaker 30ml (1fl oz)                                      | T13830628 | Replacement Sensor for Conductivity Meter & Bresle Salt Meter |

• Certificate of Cleanliness & Test Area available at [www.elcometer.com/cert](http://www.elcometer.com/cert)

\* See Elcometer 138 Bresle Salt Meter for full specification  
\* See Elcometer 138 Conductivity Meter for full specification

**Elcometer 138****Bresle Salt Meter**

Incorporating a flat sensor, the Elcometer 138 Bresle Salt Meter measures the conductivity of a sample, then automatically converts this to show the density of salts, negating the need for the user to do a manual calculation when working in accordance with ISO 8502-6 or ISO 8502-9.

**Features:**

- Highly precise measurements can be obtained from a single drop
- Out of range and low battery alarms
- Visual indication when ambient temperature is outside the operating range

**Technical Specification**

| Part Number           | Description   |   |
|-----------------------|---|---|
| <b>E138-BSM</b>       | Elcometer 138 Bresle Salt Meter   |   |
| Measurement Principle | 2 Electrode Bipolar AC  |   |
| Measurement Mode      | ISO, IMO, Temperature   |   |
| Minimum Sample Volume | 0.12ml  |   |
|                       | ISO Mode  | IMO Mode  |
| Measuring Range       | 0 - 2399µg/cm <sup>2</sup>  | 0 - 2199µg/cm <sup>2</sup>  |
| Conversion Factor     | µS/cm to µg/cm <sup>2</sup> : 0.12<br>µS/cm to mg/m <sup>2</sup> : 1.2  | µS/cm to µg/cm <sup>2</sup> : 0.11<br>µS/cm to mg/m <sup>2</sup> : 1.1                                    |
| Resolution            | 0 - 239.9µg/cm <sup>2</sup> : 0.1µg/cm <sup>2</sup><br>240 - 2399µg/cm <sup>2</sup> : 1µg/cm <sup>2</sup>                                 | 0 - 219.9µg/cm <sup>2</sup> : 0.1µg/cm <sup>2</sup><br>220 - 2199µg/cm <sup>2</sup> : 1µg/cm <sup>2</sup> |
| Accuracy              | ±2% full scale (for each range)   |   |
| Operating Temperature | 5°C to 40°C (41°F to 104°F)   |   |
| Operating Humidity    | 85% or less relative humidity (no condensation)   |   |
| Battery Type          | 2 x CR2032 lithium batteries  |   |
| Battery Life          | approx. 200 hours of continuous use without backlight   |   |
| Weight                | 50g (1.76oz) - including sensor and batteries   |   |
| Dimensions            | 164 x 29 x 20mm (6.5 x 1.1 x 0.79")   |   |
| Packing List          | Elcometer 138 Bresle Salt Meter, 14ml (0.5fl oz) bottle of conditioning solution, 2 x CR2032 lithium batteries and operating instructions |   |

**Accessories**

|                    |   |
|--------------------|---|
| <b>T13830628</b>   | Replacement Conductivity Sensor                                 |
| <b>T13830629-1</b> | Standard 84µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle |



## Elcometer 138

## Conductivity Meter



Incorporating a flat sensor, the Elcometer 138 Conductivity Meter can measure the conductivity of a solution from a single drop of a sample.

Users can either place a sample on the meter's flat sensor or immerse the meter's sensor directly into the solution under test. The Elcometer 138 can be used for a broad range of applications, including: soluble salt concentrations, the electric conductivity (EC) of solutions used in agricultural operations and measuring rainwater pollution levels.

The Elcometer 138 Conductivity Meter includes a convenient salinity conversion indicator.

### Features:

- Highly precise measurements can be obtained from a single drop
- Automatic range switching gives a wide measurement range of 1µS/cm to 19.99mS/cm
- Out of range and low battery alarms
- Visual indication when ambient temperature is outside the operating range

### Technical Specification

| Part Number           | Description   |
|-----------------------|---|
| <b>E138-CM</b>        | Elcometer 138 Conductivity Meter  |
| Measurement Principle | 2 Electrode Bipolar AC  |
| Measurement Mode      | Conductivity, Temperature   |
| Minimum Sample Volume | 0.12ml  |
| Measuring Range       | 0 - 19.99mS/cm  |
| Resolution            | 0 - 1999µS/cm: 1µS/cm<br>2.00 - 19.99mS/cm: 0.01mS/cm   |
| Accuracy              | ±2% full scale (for each range)   |
| Operating Temperature | 5°C to 40°C (41°F to 104°F)   |
| Operating Humidity    | 85% or less relative humidity (no condensation)   |
| Battery Type          | 2 x CR2032 lithium batteries  |
| Battery Life          | approx. 200 hours of continuous use without backlight   |
| Weight                | 50g (1.76oz) - including sensor and batteries   |
| Dimensions            | 164 x 29 x 20mm (6.5 x 1.1 x 0.79")   |
| Packing List          | Elcometer 138 Conductivity Meter, 14ml (0.5fl oz) bottle of conditioning solution, 14ml (0.5fl oz) bottle of standard 1413µS/cm calibration solution, 2 x CR2032 lithium batteries and operating instructions |

### Accessories

|                    |   |
|--------------------|---|
| <b>T13830628</b>   | Replacement Conductivity Sensor                                   |
| <b>T13830629-2</b> | Standard 1413µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle |

**Elcometer 138/2****Surface Contamination Kit**

Measuring the level of contaminants on a surface prior to application of the coating is essential to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly recoating and high maintenance costs.

The Elcometer 138/2 Surface Contamination Kit provides the user with a means for testing invisible surface contaminants, these include:

- pH
- chloride ions
- iron
- salts

**STANDARDS:**

AS 3894.6-A, AS 3894.6-D,  
SSPC Guide 15

**Technical Specification**

| Part Number       | Description  | Certificate |
|-------------------|--|-------------|
| <b>E138----</b> 2 | Elcometer 138/2 Surface Contamination Kit  | ●           |
| Measuring Range   | pH: 0pH to 14pH<br>Iron: 3,10, 25, 50, 100, 250, 500mg/l Fe <sup>2</sup><br>Chloride: 30- 600µg/cm <sup>2</sup> (30 - 600ppm) Cl   |             |
| Dimensions        | 300 x 220 x 75mm (11 x 8.6 x 3")   |             |
| Weight            | 2.1kg (4.62lb)   |             |
| Packing List      | 100 x pH test strips, 100 x iron test strips, 40 x chloride test strips, 50 x Elcometer 135C Bresle test patches, 3 x 5ml (0.17fl oz) syringes, 3 x needles, 30ml (1fl oz) plastic beaker, carry case and operating instructions |             |

**Accessories**

|                      |   |
|----------------------|---|
| <b>E135----</b> C25  | Elcometer 135C Bresle Test Patch (Pack of 25) |
| <b>E135----</b> C100 | Elcometer 135C Bresle Test Patch (Box of 100) |
| <b>T13818517</b>     | 3 x 5ml (0.17fl oz) Syringes                  |
| <b>T13818518</b>     | 3 x Needles                                   |
| <b>T13818519</b>     | Plastic Beaker, 30ml (1fl oz)                 |
| <b>T13827259</b>     | Pure Distilled Water, 250ml (8.5fl oz) Bottle |
| <b>T13820562</b>     | 100 x pH Test Strips                          |
| <b>T13820563</b>     | 100 x Iron Test Strips                        |
| <b>T13820564</b>     | 40 x Chloride Test Strips                     |

**Elcometer 138/2****Chloride Test Strips**

Chloride ions on a steel surface increase the probability that corrosion of the steel will take place even if a protective coating is applied. Chloride ions trapped under a coating in the presence of steel and moisture will form a corrosion cell. This corrosion process will result in premature failure of the protective coating and may cause blistering of coatings in immersion service.

The chloride test strips will indicate the concentration of chloride ions in the sample solution and if the area of sample collection and the volume of water is known the concentration can be measured in parts per million or micrograms per millilitre.

**Technical Specification**


| Part Number | Description               |
|-------------|---------------------------|
| T13820564   | 40 x Chloride Test Strips |

**Elcometer 138/2****Iron Test Strips**

Ferrous ions are an indicator of the corrosion of steel as they are formed when the iron oxidises as a result of a corrosion cell formed between the steel and oxygen in the presence of water. The ferrous ion test strips will also indicate the concentration of ferrous ions in a sample solution in the same way as the chloride strips.

**Technical Specification**

| Part Number | Description            |
|-------------|------------------------|
| T13820563   | 100 x Iron Test Strips |

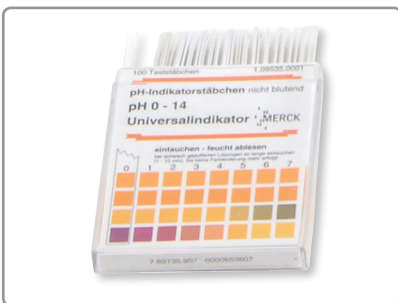**Elcometer 138/2****pH Test Strips**

These strips will determine if a solution or surface is acid or alkaline in nature. Acids form when certain gases are dissolved in water, for example, chlorine in water produces hydrochloric acid, carbon dioxide in water produces carbonic acid, sulphur dioxide in water produces sulphuric acid all of which are corrosive to steel.

The presence of these contaminants can either be detected in a solution washed from the surface or by putting a wet pH Test Strip on to the dry surface. pH does not measure the concentration but it does indicate how acidic or alkaline the surface is. Alkaline surfaces are normally associated with either concrete surfaces that are to be coated or steel re-enforcement bars buried in concrete.

**Technical Specification**

| Part Number | Description          |
|-------------|----------------------|
| T13820562   | 100 x pH Test Strips |



**Elcometer 134S****Chloride Ion Test Kit for Surfaces****STANDARDS:**


ISO 8502-5, SSPC Guide 15

Chloride salts left on the surface before the first coat is applied can result in the coating system being forced off the surface by corrosion or blistering before the full life of the coating has been reached. To ensure that the chloride has been removed it is essential that the surface is tested before the coating is applied.


Elcometer 134S test method: a latex sleeve is filled with a Chlor\*Rid extract solution and stuck to the test surface where the solution is worked against the surface to extract the salts. The titration tube is inserted and the results can be recorded.

**Technical Specification**


| Part Number      | Description  |
|------------------|--|
| <b>E134----1</b> | Elcometer 134S Salt Detection Kit for Blast Cleaned Surfaces   |
| Measuring Range  | 1 - 60 $\mu$ g/cm <sup>2</sup> (1 - 60ppm)   |
| Scale Resolution | 1 $\mu$ g/cm <sup>2</sup> (1ppm)   |
| Tests per Kit    | 5  |
| Dimensions       | 185 x 125 x 110mm (7 x 5 x 4.5")   |
| Weight           | 250g (9oz)   |
| Packing List     | 5 x test kits each containing: titration tube snapper, strap, clip, pre-measured bottle of Chlor*Rid extract solution, sleeve, titration tube and operating instructions |

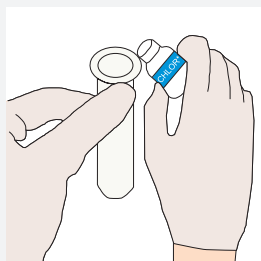**How to use a Chloride Ion Test Kit for Surfaces**


1. Remove cap from CHLOR\*EXTRACT solution bottle and pour entire contents into the test sleeve.

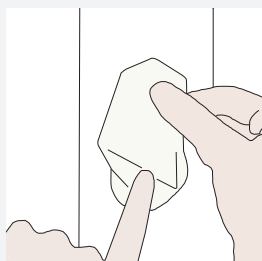


2. Firmly apply test sleeve to test surface, allowing extract solution to come into contact with test surface.

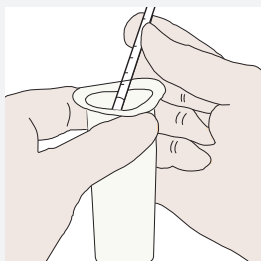

3. Insert the titration tube into the test sleeve.

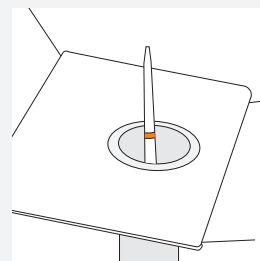

4. Insert sleeve with extract solution and titration tube into the hole previously made in the box lid and wait 1½ minutes.

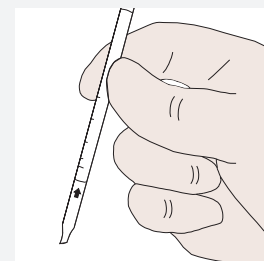

5. Immediately remove and read the number on the titration tube at the interface of the colour change. Pink is normal, white is the chloride level.



**For Chloride Ion Test Kits for water and abrasives see page 1-3**

## Elcometer 134 CSN

## CSN Chloride, Sulphate & Nitrate Kit



The Elcometer 134 CSN Salt Kit is designed to accurately measure surface chloride, sulphate and nitrate ions in minutes and offers a single kit solution for testing in the field.

All the components of the Elcometer CSN Test Kits are pre-measured and pre-dosed for trouble free testing.

Results are recorded in parts per million (ppm) requiring no complicated calculations. Elcometer 134 CSN tests are all designed to use a ratio of 1:1 for easy conversion to  $\mu\text{g}/\text{cm}^2$ .

Supplied in an ABS plastic carry case for easy portability around the site, each field kit is supplied with full instructions attached to the inside lid, together with:

- 5 x Chloride tests
- 5 x Sulphate tests, together with 1 x colorimeter, for sulphate testing
- 5 x Nitrate test strips
- 5 x Syringes (without needles)

Refill kits containing 5 x chloride, nitrate and sulphate tests are available.

### STANDARDS:

ISO 8502-5, ISO 8502-11,  
SSPC Guide 15

### Technical Specification

| Part Number         | Description   |
|---------------------|---|
| <b>E134-CSN</b>     | Elcometer 134 CSN Chloride, Sulphate & Nitrate Test Kit   |
| Measuring Range     | 0 - 100 $\mu\text{g}/\text{cm}^2$ (0 - 100ppm)  |
| Scale Resolution    | 1 $\mu\text{g}/\text{cm}^2$ (1ppm)  |
| Sample Time         | 1 - 5 minutes (approximately)   |
| Storage Temperature | Not exceeding 25°C (77°F)   |
| Dimensions          | 360 x 320 x 140mm (14.2 x 12.6 x 5.5")  |
| Weight              | 1.76kg (3.8lb)  |
| Packing List        | 5 x tests (containing: 5 x chloride tests, 5 x nitrate test strips, 5 x sulphate tests, 5 x syringes), a colorimeter, carry case and operating instructions |

### Accessories

|                 |                                  |
|-----------------|----------------------------------|
| <b>T134-KIT</b> | Refill Kit for Elcometer 134 CSN |
|-----------------|----------------------------------|

**Elcometer 139****Amine Blush Swab Test Kit**

When using amine cured epoxy resin coatings in a multi-layer system, if the original coating cures in a low ambient temperature and/or in a high humidity environment, problems - referred to in the industry as amine blush can develop. The presence of amine blush can lead to inter-coat adhesion failures if the film is re-coated.

The Elcometer 139 Amine Blush Swab Test Kit is a rapid colorimetric test designed solely for the use in the quick and immediate identification of amine blush (carbamates) on the surface of coatings using surface swabs. The presence of amine blush is indicated by a visual change of colour of the test solution when compared with a control sample.

**Technical Specification**

| Part Number      | Description   |
|------------------|---|
| <b>E139----A</b> | Amine Blush Swab Test Kit   |
| Dimensions       | 172 x 110 x 100mm (6.75 x 4.25 x 4.00")      Weight      350g (12.3oz)  |
| Packing List     | 20 x polystyrene sampler test tubes of 1.0ml (0.035fl oz) buffer solution, a test tube of diluent part A solution, a test tube of diluent part B solution, 2 x diluent transfer pipettes, 3 x test part A dropper bottles - containing ACh-E powder (freeze dried), 3 x test part B dropper bottles - containing ATC powder (freeze dried), a test part C dropper bottle - containing chromogen DTNB solution, a bottle of swab solution - containing 25ml (0.89fl oz) of rubbing alcohol (70% IPA), 20 x cotton swabs (q-tips), 2 x swab templates - 2.54 x 2.54cm (1 x 1"), a pair of tweezers, a re-sealable plastic bag for content disposal and operating instructions |

**Elcometer 139****Amine Blush Chip Screen Test Kit**

The Elcometer 139 Amine Blush Chip Screen Test Kit is a rapid colorimetric test designed solely for the use in the quick and immediate identification of amine blush (carbamates) on the surface of coatings using small chips or shavings.

The presence of amine blush is indicated by a visual change of colour of the test solution when compared with a control sample.

The Elcometer 139 determines whether amine blush is or is not present on the coating's surface.

**Technical Specification**

| Part Number      | Description  |
|------------------|--|
| <b>E139----C</b> | Amine Blush Chip Screen Test Kit   |
| Dimensions       | 172 x 110 x 100mm (6.75 x 4.25 x 4.00")      Weight      310g (10.9oz)   |
| Packing List     | 20 x polystyrene sampler test tubes of 1.0ml (0.035fl oz) buffer solution, 1 x test tube of diluent part A solution, 1 x test tube of diluent part B solution, 2 x diluent transfer pipettes, 3 x test part A dropper bottles - containing ACh-E powder (freeze dried), 3 x test part B dropper bottles - containing ATC powder (freeze dried), 1 x test part C dropper bottle - containing chromogen DTNB solution, 1 x scissors<br>1 x re-sealable plastic bag for content disposal and operating instructions |

**Accessories**

**T13923546**      Test Tube Stand



## Elcometer 142

## ISO 8502-3 Dust Tape Test Kit



The Elcometer 142 Dust Tape Test kit allows assessment of the quantity and size of dust particles on surfaces prepared for painting. Dust on blast cleaned surfaces can reduce coating adhesion, leading to premature coating failure and sub-standard coating finish.

Used in conjunction with the Elcometer 145 Dust Tape Roller the kit can be used in accordance with the recommendations of BS EN ISO 8502-3 either as a pass/fail test or as a permanent record of the presence of dust.

### STANDARDS:

AS3894.6-C, IMO MSC.215 (82),  
IMO MSC.244 (83), ISO 8502-3,  
US Navy PPI 63101-000

### Technical Specification

| Part Number     | Description   |        |            |
|-----------------|---|--------|------------|
| E142----1       | Elcometer 142 ISO 8502-3 Dust Tape Test Kit   |        |            |
| Measuring Range | Chart with dust classes ranging from 0 - 5 with descriptions for accurate class placement   |        |            |
| Dimensions      | 210 x 297mm (8.27 x 11.69")   | Weight | 250g (9oz) |
| Packing List    | Microscope with 10 x magnifier, 2 batteries (LR14), graticule, adhesive tape to specification ISO 8502-3, comparator display board, dust assessment plate, test record sheets (pack of 25) and operating instructions |        |            |

### Accessories

|                   |                                    |
|-------------------|------------------------------------|
| <b>T14219451</b>  | Test Record Sheet                  |
| <b>T14219454</b>  | Display Board                      |
| <b>T9999358-1</b> | Adhesive Tape (1 roll) ISO 8502-3  |
| <b>T9999358-2</b> | Adhesive Tape (2 rolls) ISO 8502-3 |
| <b>T14219525</b>  | Dust Assessment Plate              |

## Elcometer 145

## Dust Tape Roller



The Elcometer 145 Dust Tape Roller is used in conjunction with the Elcometer 142 Dust Tape Test kit to assess the quantity and size of dust particles on surfaces prepared for painting.

The Dust Tape Roller presses the Elcometer 142 Dust Tape to the surface using a controlled constant force as required by BS EN ISO 8502-3 (BS 7079-B3:1993).

### Technical Specification

|              |  |        |               |
|--------------|--|--------|---------------|
| Part Number  | Description  |        |               |
| E145-----1   | Elcometer 145 Dust Tape Roller                                 |        |               |
| Load Exerted | 39.2 to 49.0 N, (8.8 and 11.0 lbF) when spring fully depressed |        |               |
| Dimensions   | 160 x 70 x 110mm (6.3 x 2.76 x 4.33")                          | Weight | 615g (21.7oz) |

# For abrasive blast machines, blast hose, blast nozzles & protective equipment visit [blast.elcometer.com](http://blast.elcometer.com)



**Abrasive Blast Machines**

**Elcometer 24200**  
200 litre  
7.06cu ft

*Ideal for high volume work, easy to fill with large capacity*

*Choice of static or twin wheeled portable machines that are safe and easy to manoeuvre*

*Available with a range of media valves to suit your application*

*Heavy duty 4mm (1/8") construction*

*Easy & quick to service*

For a full range of lids & sieves see page 4.2

**elcometer**

**Abrasive Blast Machines**

**Kit Selection**

Elcometer Blast Machine Kits are available with:

|  | General Media Valve (G) | Automatic General Valve (AG) | Port Numbers            |   |
|--|-------------------------|------------------------------|-------------------------|---|
|  |                         |                              | Kit 1 Kit 2 Kit 3 Kit 4 |   |
| 24" (610mm) 200 litre (7.06cu ft) Abrasive Blast Machine                                     | ✓                       | ✓                            | ✓                       | ✓ |
| Pressure Test Certificate  | ✓                       | ✓                            | ✓                       | ✓ |
| PCV4000 Remote Control Valve with Air Manifold, Exhaust & Silencer                           | ✓                       | ✓                            | ✓                       | ✓ |
| 20m (65.6ft) Pneumatic Control Hose & Deadman's Handle (DGRH)                                | ✓                       | ✓                            | ✓                       | ✓ |
| Choke Valve and Pusher Line  | ✓                       | ✓                            | ✓                       | ✓ |
| Abrasive Matching Valve with Mixer T1 and Metal Pin Coupling                                 | ✓                       | ✓                            | ✓                       | ✓ |
| Moisture Separator   | ✓                       | ✓                            | ✓                       | ✓ |
| 20m (65.6ft) 1 1/2" (38mm) ID Blast Hose with Cast Iron Hose Couplings & Nylon Nozzle Holder | ✓                       | ✓                            | ✓                       | ✓ |
| Externally Mounted Sieve and Lid   | ✓                       | ✓                            | ✓                       | ✓ |

**Elcometer 24200 Abrasive Blast Machine Technical Specification**

| Capacity*                       | Volume    | Weight      |
|---------------------------------|-----------|-------------|
| 200 litres                      | 7.06cu ft | 103 lbs     |
| Aluminium Grit                  |           | 194 lbs     |
| Steel Shot/Garnet               |           | 194 lbs     |
| Port Diameter                   | 610mm     | 24"         |
| Height                          | 1360mm    | 54"         |
| Width                           | 754mm     | 31"         |
| Depth                           | 1100mm    | 44"         |
| Weight                          | 205kg     | 452 lbs     |
| Pipework Diameter               | 38mm      | 1 1/2"      |
| Maximum Working Pressure (W.P.) | 12bar     | 174psi      |
| Operating Temperature Range     | 0 to 60°C | 32 to 140°F |

**Additional Items**

For a complete range of operator safety equipment see page 5-0

Blast Helmets see page 5-4

Blast Nozzles see page 6-7

Protective Clothing see page 5-20

Blast Hoses see page 5-4

\* 1 Meter for Flat Valve versions.

\* Aluminium & steel shot capacity figures based on typical media bulk density. Note that bulk density varies according to media size and grade.

\* Do not operate this abrasive blast machine unless there is an appropriate safety pressure relief valve within the pressurised system as a whole.

**elcometer.com**



elcometer<sup>®</sup>





A low-angle, close-up photograph of a white wind turbine. The image shows the upper part of the tower, the nacelle, and the hub where the blades are attached. The background is a bright blue sky with soft, white clouds. The lighting suggests it's daytime, with some shadows on the turbine's surface.

# Climatic Conditions

Temperature, Relative Humidity & Dewpoint

5



**Monitoring climatic conditions, such as temperature, relative humidity, dewpoint and moisture, is often vital to the successful application of a coating and are critical to the resulting quality and performance of the coated product.**

*Climatic Conditions:* Elcometer offer a complete range of dewpoint and relative humidity meters, thermometers, dataloggers, moisture meters and anemometers to monitor climatic conditions.

In the protective coatings industry, moisture can form on the surface when the surface temperature is low enough to cause condensation from the atmosphere. The Dewpoint temperature ( $T_d$ ) is the point at which this occurs.

Monitoring the surface temperature ( $T_s$ ), the air temperature ( $T_a$ ) and its relative humidity (%RH) allows the dewpoint temperature to be calculated and compared to the surface temperature. This difference in temperature ( $T\Delta$ ) is the key parameter dictating when it is safe to apply the coating.



**Elcometer 319****Dewpoint Meter**

The rugged **Elcometer 319** Dewpoint Meter is designed to measure and record all relevant climatic parameters required to determine whether the conditions are suitable for painting.

Stores 25,000 records in up to 999 batches<sup>1</sup>

Integrated magnets allow the gauge to be attached to the substrate during remote logging

Robust temperature sensors


Easy to use, intuitive menu structure

A hand-held Dewpoint meter with both manual and automatic data logging in one gauge<sup>1</sup>

Fully dustproof and waterproof (equivalent to IP66)

Visual and audible indication of user defined limits for any or all parameters

Gauges can be recertified at Elcometer Authorised Service Centres

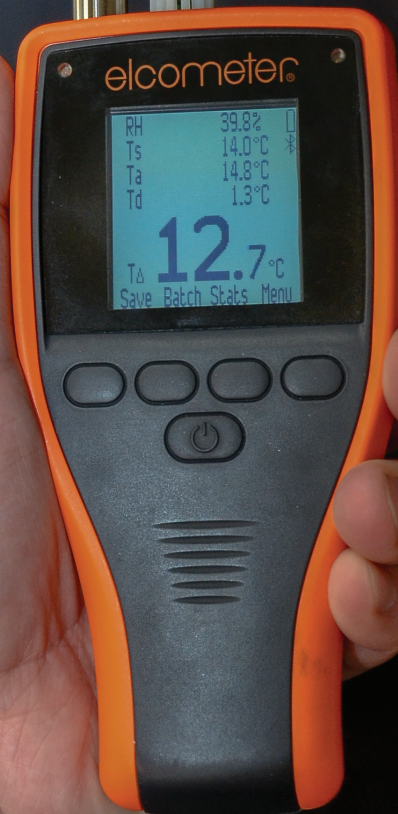

etv video available  
elcometer.tv

**2 YEAR\***  
WARRANTY

<sup>1</sup> Model T only    \* The Elcometer 319 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).



### Elcometer 319

### Dewpoint Meter

#### STANDARDS:

BS 7079-B4, IMO MSC.215(82),  
IMO MSC.244(83), ISO 8502-4,  
US Navy NSI 009-32,  
US Navy PPI 63101-000



Large easy to read measurements in degrees °C or °F



View up to 5 user selectable parameters on screen



Review individual readings

#### Measure and record climatic parameters:

- RH** Relative humidity
- T<sub>a</sub>** Air temperature
- T<sub>s</sub>** Surface temperature
- T<sub>d</sub>** Dewpoint temperature
- T<sub>Δ</sub>** T<sub>Δ</sub> (the difference between surface temperature and dewpoint)
- T<sub>db</sub>** Dry Bulb temperature
- T<sub>wb</sub>** Wet Bulb temperature
- T<sub>e</sub>** External probe temperature (K-type)
- SH** Specific Humidity<sup>1</sup>

#### Versatile

- Can be used as either a hand-held dewpoint meter or as a remote data logging monitor<sup>1</sup>
- Rapid response time
- Each gauge can be powered by either 2 x AA batteries (for up to 400 hours<sup>2</sup> use) or directly via the USB cable
- Adjustable limits can be set for each measurement parameter which triggers visual and audible alarms whenever a limit is exceeded
- Intelligent memory calculates total available logging time when using batches
- Gauges can be recertified at Elcometer Authorised Service Centres

#### Accurate

- Meets requirements of ISO 8502 Standard
- Each instrument is supplied with a Calibration Certificate
- Readings are switchable between Celsius and Fahrenheit
- All readings are time & date stamped

<sup>1</sup> Model T only

<sup>2</sup> Based on 1 reading every 10 minutes in Logging Mode.

**Elcometer 319****Dewpoint Meter**

Te - Ideal for use as a simple thermometer



Waterproof and rugged to IP66



Remote monitoring of climatic parameters



Fully dustproof and waterproof

**Simple**

- Easy menu-driven user interface in multiple languages
- Clear, illuminated display showing up to five user-defined parameters
- Arrow indicators show parameter trends

**Flexible**

- Integrated K-Type connector allows measurement of surface temperature during remote logging using a separate probe
- Using an external probe, the thermometer mode transforms the gauge into a thermometer - ideal for measuring the temperature of paint prior to application
- Hold/freeze function allows manual readings to be reviewed before being added into the memory

**Durable**

- Available with a two year\* manufacturer's warranty; giving you peace of mind
- Safe to use in climates between -20°C (-4°F) and +80°C (+176°F)
- Waterproof and dustproof rating equivalent to IP66
- Rugged, ergonomic design, the re-engineered sensors have greater durability for an extended life

**Powerful**

Connect the Elcometer 319 via Bluetooth® or USB to a PC, Android™ or iOS mobile device & download the data into an inspection application or into ElcoMaster® software for instant report generation.



\* The Elcometer 319 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

## Elcometer 319

## Dewpoint Meter

### Technical Specification

| Model  | Model S   | Model T                                  | Certificate   |
|--|---|--|---------------|
| Part Number  | G319-----S  | G319-----T                               | ●             |
| Reading Parameters -<br>RH, Ta, Ts (Te <sup>6</sup> ), Td, TΔ, Tdb, Twb <sup>1</sup> , SH <sup>1,8</sup> | ■   | ■  |               |
| Statistics - number of readings, standard deviation,<br>mean, coefficient of variation, minimum, maximum | ■   | ■  |               |
| Dustproof & waterproof - equivalent to IP66  | ■   | ■  |               |
| Integral Magnets - secure the gauge during logging   | ■   | ■  |               |
| High/Low Limits - audible, visual, red/green LED<br>alarms can be set against any or all parameters      | ■   | ■  |               |
| Multilingual Menus   | ■   | ■  |               |
| Backlight - user selectable  | ■   | ■  |               |
| K-Type Connector for external probes   | ■   | ■  |               |
| Memory - with reading and statistic review   | Last 10 records   | 25,000 records in 999 batches            |               |
| Manual Logging   | ■   | ■  |               |
| Interval Logging <sup>2</sup>  |   | Adjustable between 1 second and 24 hours |               |
| Data Output  |   |  |               |
| USB  |   | ■  |               |
| Bluetooth® to computer, Android™ & iOS® devices  |   | ■  |               |
| ElcoMaster® software & USB cable   |   | ■  |               |
|  | Temperature Range   | Accuracy                                 | Resolution    |
| Gauge <sup>5</sup>   | -20 to +80°C (-4 to +176°F)   | ±0.5°C (±1°F)                            | 0.1°C (0.1°F) |
| Air Temperature (Ta)   | -20 to +80°C (-4 to +176°F)   | ±0.5°C (±1°F) <sup>7</sup>               | 0.1°C (0.1°F) |
| Surface Temperature (TS)   | -20 to +80°C (-4 to +176°F)   | ±0.5°C (±1°F)                            | 0.1°C (0.1°F) |
| External K-Type Thermocouple (Te)  | -40 to +200°C (-40 to +392°F)   | ±0.5°C (±1°F) <sup>6</sup>               | 0.1°C (0.1°F) |
| Relative Humidity (RH)   | 0 to 100%RH   | ±3%RH <sup>3</sup>                       | 0.1%          |
| Gauge & LCD Operating Range  | -20°C to +80°C (-4°F to +176°F)   |  |               |
| Power Supply   | 2 x AA batteries or via USB Cable   |  |               |
| Battery Life   | Manual Mode: Greater than 40 hours (Backlight Off)<br>Interval Logging: up to 400 hours<br>(1 reading every 10 minutes)   |  |               |
| Dimensions   | 180 x 75 x 35mm (7 x 3 x 1.4")  | Weight                                   | 300g (0.66lb) |
| Packing List   | Elcometer 319 Dewpoint Meter, 2 x AA batteries, wrist strap, protective pouch, calibration certificate, USB cable <sup>8</sup> , ElcoMaster® software <sup>8</sup> and operating instructions |  |               |

### Accessories

|           |   |
|-----------|---|
| T31920162 | External Magnetic Surface Temperature Probe; -40 to +80°C (-40 to +176°F) |
| T9996390- | External Liquid Temperature Probe; -200 to +1100°C (-328 to +2012°F)      |
| T99921325 | USB Cable   |
| T99916063 | Wrist Strap   |
| T99923480 | Protective Pouch  |

<sup>1</sup> Calculated Value    <sup>2</sup> With Part Number T31920162    <sup>3</sup> at 1m/s    <sup>4</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.  
<sup>5</sup> Do not expose the gauge to temperatures outside the gauge and LCD operating range    <sup>6</sup> Accuracy ±2°C (4°F) with K Type probes supplied by Elcometer. Gauge tested with voltage input  
<sup>7</sup> Accuracy ±0.75°C below 10°C (±1.35°F below 50°F)    <sup>8</sup> Model T only.  
 ● Certificate supplied as standard.



Elcometer 308 & 309

Digital Hygrometers



Elcometer 308

Elcometer 309

STANDARDS:

BS 7079-B4 (Elcometer 309),  
ISO 8502-4 (Elcometer 309)

The **Elcometer 308 Hygrometer** has been specifically designed for use in very hot climates where the surface temperature of the substrate can exceed the paint manufacturer's recommended limits for successful painting.

Painting beyond recommended limits can have a detrimental effect on the performance and lifetime of the coating. The Elcometer 308 Hygrometer provides a simple and fast measurement of relative humidity and surface temperature.

The **Elcometer 309 Delta T Hygrometer** provides a simple and fast measurement of the two critical climate parameters within coatings:

- **Delta T ( $T_{\Delta}$ ):** The difference between the surface temperature ( $T_s$ ) and the dewpoint temperature ( $T_d$ ). When  $T_{\Delta}$  is less than 3°C (5°F) painting should not occur.
- **Relative Humidity (RH):** Expressed as a percentage, RH is the ratio of the amount of water vapour actually held by the air compared to the maximum amount of water vapour the air could hold at a given temperature. Typical maximum RH values specified by paint manufacturers are between 75% and 85%.

Technical Specification

| Model  | Elcometer 308 Hygrometer  | Elcometer 309 Delta T Hygrometer  | Certificate |
|--|---|---|-------------|
| Part Number                                    | G308----1   | G309----1   | •           |
|  | <div>T<sub>s</sub></div> <div>RH</div>  | <div>T<sub>Δ</sub></div> <div>RH</div>  |             |
| Operating Range                                | -20°C to +80°C (-4°F to +176°F)   | -20°C to +80°C (-4°F to +176°F)   |             |
| Surface Temperature (TS)                       | -20°C to +80°C (-4°F to +176°F)   | -20°C to +80°C (-4°F to +176°F)   |             |
| Relative Humidity (RH) & Accuracy <sup>1</sup> | 0% to 100% RH (±3%)   | 0% to 100% RH (±3%)<br>(Default upper limit 75%, user adjustable)   |             |
| Resolution                                     | 0.1°C (0.1°F) / 0.1%  | 0.1°C (0.1°F) / 0.1%  |             |
| Power Supply                                   | 2 x AA batteries or via USB Cable   | 2 x AA batteries or via USB Cable   |             |
| Battery Life                                   | Greater than 40 hours (Backlight off)   | Greater than 40 hours (Backlight off)   |             |
| Dimensions & Weight                            | 180 x 75 x 35mm (7 x 3 x 1.4") 300g (10.6oz)  | 180 x 75 x 35mm (7 x 3 x 1.4") 300g (10.6oz)  |             |
| Packing List                                   | Elcometer 308 Hygrometer, wrist strap, 2 x AA batteries, protective carry case/pouch with belt clip, RH & surface probe calibration certificate and operating instructions. | Elcometer 309 Delta T Hygrometer, wrist strap, 2 x AA batteries, protective carry case/pouch with belt clip, RH probe calibration certificate and operating instructions. |             |

<sup>1</sup> at 1m/s



Climatic conditions, surface profile and coating thickness  
in one easy to use inspection kit - see page 11-3

• Basic Calibration Certificate supplied as standard.

## Elcometer 116

## Whirling & Sling Hygrometers



These instruments are designed to determine the dewpoint and relative humidity at any given time.

The Elcometer 116A Whirling Hygrometer is available in Celsius scale only. A guide for relative humidity (RH) determination is supplied with each instrument and the dewpoint can accurately be obtained using the Elcometer 114 Dewpoint Calculator.

The Elcometer 116C Sling Hygrometer, shown as the black unit in the photograph, is a convenient, self contained instrument with an inbuilt slide rule for the calculation of %RH and dewpoint. It has spirit filled thermometers and is available in °C or °F scales.

### STANDARDS:

ASTM E 337-B, BS 2842, ISO 8502-4

- Manual operation
- Spirit filled thermometers



T<sub>db</sub>


T<sub>wb</sub>

### Technical Specification

| Part Number     | Description   |
|-----------------|---|
| G116A---1       | Elcometer 116A Whirling Hygrometer - Metric °C  |
| G116C---1       | Elcometer 116C Sling Hygrometer - Metric °C   |
| G116C---2       | Elcometer 116C Sling Hygrometer - Imperial °F   |
| Measuring Range | -5°C to 50°C (23°F to 122°F)  |
| Dimensions      | 17 x 22mm (6.9 x 10")   |
| Weight          | 300g (0.6lb)  |
| Packing list    | Elcometer 116 Whirling Hygrometer, RH look-up table, carry case and operating instructions<br>Elcometer 116 Sling Hygrometer, slide rule table and operating instructions |

### Accessories

|           |   |
|-----------|---|
| T1164441- | Elcometer 116A Spare Thermometer (°C)             |
| T11631224 | Elcometer 116C Spare Thermometer (°C) (Pack of 2) |
| T1164479- | Elcometer 116C Spare Thermometer (°F)             |
| T1164487- | Elcometer 116A Wicks (Pack of 5)                  |
| T11631168 | Elcometer 116C Wicks (Pack of 4)                  |
| T11600212 | Elcometer 116A Replacement Slide Rule             |
| T13827259 | Pure Distilled Water - 250ml (8.5fl oz)           |
| T13827494 | Pure Distilled Water - 1000ml (33.8fl oz)         |

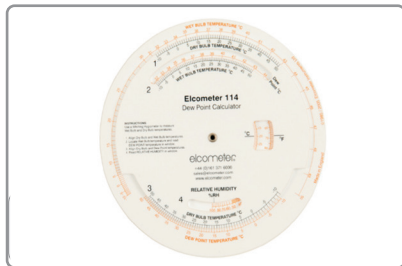**Elcometer 114****Dewpoint Calculator**


This provides accurate values of dewpoint and relative humidity (RH) from the wet and dry bulb temperatures measured by a Whirling or Sling Hygrometer.

The range of the Elcometer 114 is -10°C to 50°C (14°F to 122°F) and has an accuracy of  $\pm 1\%$  with respect to standard tables.

**Technical Specification**

| Part Number | Description                       |
|-------------|-----------------------------------|
| G114----2   | Elcometer 114 Dewpoint Calculator |

The elcometer logo in orange text.

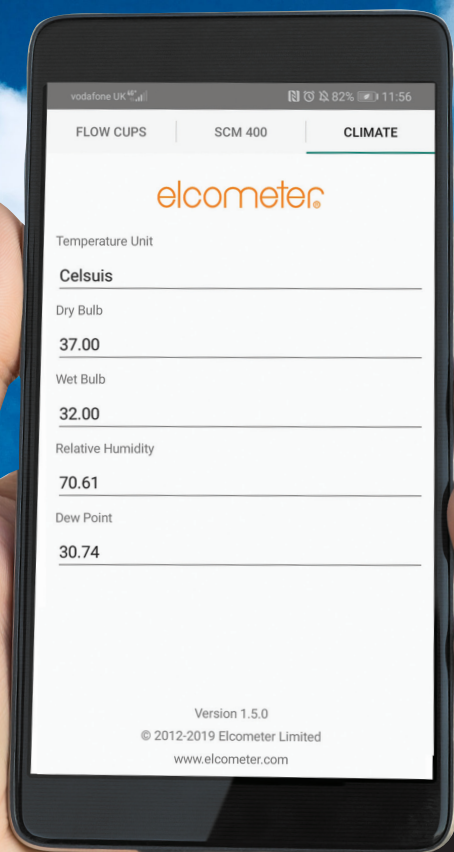

Fast and easy to use - **ElcoCalc™** instantly converts Dry Bulb and Wet Bulb measurements into Relative Humidity and Dew Point.

Free to download from the Play Store and App Store for Android and Apple devices.





## Elcometer 113

## Magnetic Thermometers



The Elcometer 113 Magnetic Thermometer continuously indicates the surface temperature of steel and other magnetic material.

The thermometers are based on a bimetallic strip and therefore do not require batteries but do require time to adjust to the temperature.

The Elcometer 113 is available in a number of scale ranges and as an economy version.




### Technical Specification

| Part Number        | Description                                 | Scale Range    |
|--------------------|---|----------------|
| <b>G113----</b> 1  | Elcometer 113 Magnetic Thermometer          | -40°C to 60°C  |
| <b>G113----</b> 2  | Elcometer 113 Magnetic Thermometer          | 0°C to 120°C   |
| <b>G113----</b> 3  | Elcometer 113 Magnetic Thermometer          | -20°C to 250°C |
| <b>G113----</b> 4  | Elcometer 113 Imperial Magnetic Thermometer | 0°F to 500°F   |
| <b>G113----</b> 2B | Elcometer 113 Economy Magnetic Thermometer  | 0°C to 120°C   |
| Dimensions         | 57 x 20mm (2.25 x 0.8")                     |                |
| Weight             | 56g (1.9oz)                                 |                |
| Packing List       | Elcometer 113 Magnetic Thermometer          |                |

## Elcometer 210

## Paint Thermometer

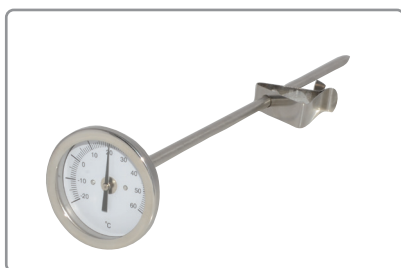

It is often important to ensure the temperature of the paint to be applied is at a temperature which will ensure correct application.

The Elcometer 210 Paint Thermometer is supplied with a clip which enables the thermometer to be hooked on to the edge of a paint pot, allowing accurate temperature measurement of the paint.

### Technical Specification

| Part Number       | Description                                 |
|-------------------|---|
| <b>G210----</b> 1 | Elcometer 210 Paint Thermometer             |
| Scale Range       | -20°C to 60°C (-4°F to 140°F)               |
| Dimensions        | 300mm (12") length with a 50mm (1.97") dial |
| Weight            | 67g (2.4oz)                                 |
| Packing List      | Elcometer 210 Paint Thermometer             |

**Elcometer 212****Digital Pocket Thermometer**

The Elcometer 212 is a digital, pocket size thermometer ideal for day to day use.

Incorporating a fast response stainless steel liquid or surface probe, the Elcometer 212 provides temperature readings in under four seconds.

Housed in a water resistant case with integrated rubber seals and a moulded flush window, preventing dirt and leaks damaging the LCD display, the Elcometer 212 is ideal for use in the harshest of environments.

The probe when not in use, conveniently folds back into the side of the instrument, preventing damage.

- Liquid or surface temperature options available
- User switchable between °C and °F
- Resolution can be set to 0.1°C (0.1°F) or 1°C (1°F)

**Technical Specification**

| Part Number           | Description   |
|-----------------------|---|
| <b>G212----1A</b>     | Elcometer 212 Digital Pocket Thermometer with Liquid Probe                                |
| <b>G212----2A</b>     | Elcometer 212 Digital Pocket Thermometer with Surface Probe                               |
| Measuring Range       | -49.9°C to +299.9°C (-58°F to +572°F) user selectable                                     |
| Operating Temperature | -20 to 50°C (-4 to 58°F)  |
| Resolution            | 0.1°C (0.1°F) or 1°C (1°F) user selectable  |
| Accuracy              | ±0.4°C (±0.7°F) up to 199.9°C (392°F), ±1°C (±1.8°F) above 199.9°C (392°F)                |
| Probe                 | K-type Thermocouple   |
| Display               | 14mm LCD  |
| Battery Type          | 2 x CR2032 batteries  |
| Battery Life          | Approximately 1500 hours  |
| Auto Switch Off Time  | 10 minutes  |
| Case Dimensions       | 19mm x 47mm x 153mm (0.7" x 1.9" x 0.7")  |
| Weight                | 97g (3.4oz)   |
| Packing List          | Elcometer 212 Digital Pocket Thermometer with batteries fitted and operating instructions |

## Elcometer 213/2

## Digital Waterproof Thermometer



The Elcometer 213/2 is a simple, easy-to-use digital thermometer for quick and easy measurements of surface and liquid temperature plus the temperature of soft materials.

### Features:

- Rubber bumper seals for impact resistance
- Waterproof case (IP67 protection)
- Extruded aluminium case for superior durability
- °C/°F switchable
- Easy to read LCD display

Probes are available to purchase separately.



### Technical Specification

| Part Number                  | Description  | Certificate |
|------------------------------|--|-------------|
| <b>G213----</b> 2            | Elcometer 213/2 Digital Thermometer <sup>1</sup>   | ○           |
| Operating Range <sup>2</sup> | -49°C to +1372°C (-56°F to 2500°F)   |             |
| Accuracy                     | ±1% of the reading ±1 digit  |             |
| Resolution                   | 0.1°C (0.1°F) up to 299.9°C (572°F), 1°C (1°F) above 299.9°C (599.9°F)                               |             |
| Battery Life                 | 5,000 hours  |             |
| Power Supply                 | 3 x AAA (LR03) 1.5V  |             |
| Dimensions                   | 35 x 60 x 115mm (1.4 x 2.4 x 4.5")   |             |
| Weight                       | 194g (0.42lb)  |             |
| Packing List                 | Elcometer 213/2 Digital Waterproof Thermometer, battery, protective pouch and operating instructions |             |

<sup>1</sup> Probes are not supplied as standard with the Elcometer 213/2; please select from the list below

<sup>2</sup> Operating range is dependent on probe used

### Accessories

|                  |  |  |
|------------------|--|--|
| <b>T99911728</b> | Magnetic Surface Probe, 13mm Diameter (0.51")      | Range: -50°C to 150°C (-58°F to 302°F)     |
| <b>T2136069</b>  | Surface Probe, 130 x 4.2mm Diameter (5.11 x 0.17") | Range: -50°C to 600°C (-58°F to 1112°F)    |
| <b>T9996390</b>  | Liquid Probe, 130 x 3mm Diameter (5.11 x 0.12")    | Range: -200°C to 1100°C (-328°F to 2012°F) |
| <b>T2136391</b>  | Needle Probe, 130 x 3mm Diameter (5.11 x 0.12")    | Range: -50°C to 400°C (-58°F to 752°F)     |


Other probes available on request. Contact Elcometer for further information.



Magnetic  
**T99911728**



Liquid  
**T9996390-**

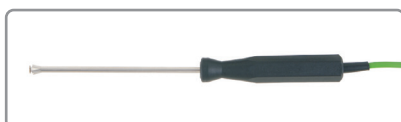

Surface  
**T2136069**



Needle  
**T2136391**

○ Optional Calibration Certificate available.



**Elcometer 214L****IR Digital Laser Thermometer**

The Elcometer 214 is a simple, easy to use, non-contact thermometer which safely and accurately measures surface temperature of non-reflective materials using infrared technology.

With a user switchable measuring range of -35°C to 365°C or -31°F to 689°F, a digital display of the temperature is produced in less than one second.


- Non-contact technology with laser spot indicator
- °C / °F user switchable
- Fast, 1 second scanning of any surface
- Measure objects as small as 25mm (1")
- Distance-to-Target Ratio of 8:1
- Easy to read LCD display

The Elcometer 214 IR Digital Laser Thermometer has a D/T ratio (Distance-to-Target) of 8:1 and measures the emitted energy from a target spot one-eighth the size of the working distance.

As can be seen in the diagram below, if the distance from the sensor optics to the target is 200mm (8") for example, the diameter of the measured area is 25mm (1").

**Technical Specification**

| Part Number         | Description   |              |                          |
|---------------------|---|--------------|--------------------------|
| <b>G214L----</b> 3  | Elcometer 214 Infrared Digital Laser Thermometer  |              |                          |
| Measuring Range     | -35°C to 365°C (-31°F to 689°F)   |              |                          |
| Ambient Temperature | 0 to 50°C (32 to 122°F)   |              |                          |
| Resolution          | 0.2°C (0.5°F)   | Accuracy     | ±1.5°C (2.7°F)           |
| Distance-To-Target  | 8:1, 25mm (1") spot size  |              |                          |
| Emissivity          | Fixed at 0.95   |              |                          |
| Response Time       | 1 second  |              |                          |
| Battery Type        | 2 x AAA batteries   | Battery Life | 14+ hours continuous use |
| Dimensions          | 166 x 34 x 64 (6.5 x 1.3 x 2.5")  | Weight       | 113g (3.98oz)            |
| Packing List        | Elcometer 214 Infrared Digital Laser Thermometer, 2 x AAA batteries, wrist strap and operating instructions |              |                          |

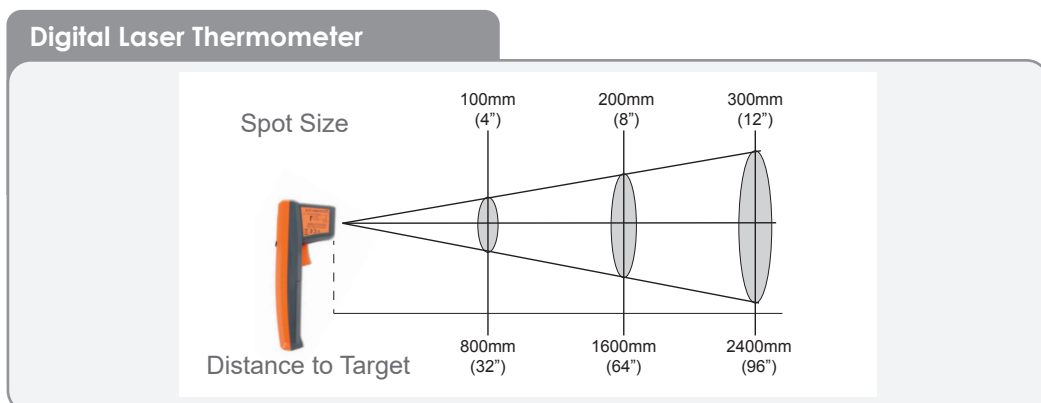

## Elcometer 410

## Anemometer



The Elcometer 410 Anemometer is a portable, pocket size instrument for taking accurate readings of wind speed.

The lightweight impeller with high precision jewel bearings provides very accurate airflow measurements. The impeller can easily be replaced without the need to return the unit to Elcometer.

The wind speed can be displayed in various measurement units; indicating current speed, maximum speed or average speed.



### Technical Specification

| Part Number           | Description  |
|-----------------------|--|
| G410-1                | Elcometer 410 Anemometer   |
| Functions             | Current wind speed<br>Average 3 second wind speed<br>Maximum wind gust<br>Data Hold  |
| Measurement Units     | Knots (kt), metres per second (m/s), kilometres per hour (km/h), miles per hour (mph), feet per minute (ft/min) and Beaufort Force (B) |
| Operating Range       | 0.4m/s to 60m/s (0.8 to 135.0mph)  |
| Specification Range   | 0.4m/s to 40m/s (0.8 to 89.0mph)   |
| On-axis Accuracy      | ±3% of reading or least significant digit, whichever is the greater  |
| Off-axis Response     | -1% at 5°, -2% at 10°, -3% at 15°  |
| Calibration Drift     | <1% after 100 hours operation at 7m/s  |
| Resolution            | 0.1 kt, m/s, km/h, mph. 1 ft/min below 1999 ft/min, 10 ft/min above 2000 ft/min.<br>1 Beaufort (0 to 12)                               |
| Operating Temperature | -10°C to +55°C (14°F to 131°F)   |
| Storage Temperature   | -30°C to +60°C (-22°F to 140°F)  |
| Power Supply          | 1 x CR2032 battery   |
| Battery Life          | Approximately 300 hours  |
| Auto Switch Off       | 45 minutes after last key press  |
| Dimensions            | Instrument Only: 122 x 42 x 20mm (4.8 x 1.6 x 0.8")<br>Instrument and Protective Cover: 122 x 46 x 26mm (4.8 x 1.8 x 1")               |
| Weight                | Instrument Only: 65g (2.3oz)<br>Instrument and Protective Cover: 102g (3.6oz)  |
| Packing List          | Elcometer 410 Anemometer, protective cover, lanyard, 1 x CR2032 battery and operating instructions.                                    |

### Accessories

T41021406 Replacement Impeller

# For all your Industrial Finishing & Physical Test Equipment visit [industrial.elcometer.com](http://industrial.elcometer.com)



**Abrasion & Washability**

**Elcometer 1720 Abrasion & Washability Testers**

The Elcometer 1720 is robust, reliable and extremely versatile and is designed for testing the washability, brushability and resistance of a wide range of materials.

- Speed cycles can be adjusted from 10 to 65 cycles per minute or set to the ISO Standard of 37 cycles/min
- The durable and robust design is stable under test allowing repeatable results, even at the fastest stroke speeds
- Can be used to test a wide range of materials including paint, seepers, sika, coatings, leather, wood, plastics, printed materials, fabrics, etc.
- Wide range of rapid change tools available for testing flat and curved samples
- User adjustable stroke length from 10 to 300mm (0.4 to 11.8")
- Test up to 4 samples simultaneously

**STANDARDS:**  
ASTM D 2486, ASTM D 2488, ASTM D 2489, ASTM D 4213, ASTM D 4638, ASTM D 4639, ASTM F 1319, DIN 53778-2:1983, ECCA T11, EN 13503-11, EN 13503-2-A, EN 233C3.2-A, EN 233C3.2-C, EN 60730-1-A, GME 60289, ISO 105-X12, ISO 11998, JIS K 5000-6-11, RSL D65 1016, ASTM D1782, BS ASTM D2198-02, ASTM D2559-18, ASTM D2671-03, MIL-C-3004, MIL-C-40057, MIL-E-11237, MIL-STD-1334B, MIL-P-15422C, FTMS 141, Method 6141, FTMS 141, Method 6142, FTMS Method 5361/701, Federal Specification P-2-2202, P-R-1700, P-W-155C, TT-P-28(1), TT-P-29(1), TT-P-30(1), TT-P-47(1), TT-E-505B, TT-E-506(1), TT-E-506C, TT-C-535B(2), TT-C-555B(1)

**Elcometer 1720 Abrasion & Washability Testers**

**Meeting Standards**

- With the wide range of tools available many Standards can be tested in one unit
- All units can be used in accordance with ASTM, DIN, EN and ISO Standards
- Easily adjustable to customer unique applications using the special tools
- Washability and abrasion testing on flat and curved samples up to 15mm (0.5") thick

**Interchangeable Tools**

- All tools are interchangeable with the rapid tool change system, making the unit ideal for use in accordance with a wide range of Standards
- For the complete range of tools, see page 13-6

**User Adjustable**

- Stroke length can be quickly and easily changed by the user to meet their specific requirements between 10 - 300mm (0.4 - 11.8")
- Speed of carriage can be adjusted between 10 and 65 cycles per minute
- Cycle counter can be pre-set to a defined number of cycles from 1 - 32,760


**Wet and Dry**

- All stations can be tested wet or dry
- Versions are available with or without an internal liquid pump
- Samples can be tested under wet or dry conditions

**Economic**

- With the ability to test up to 4 different characteristics simultaneously, significant time can be saved
- With its rapid tool change system setting up tests is fast and easy
- Easy sample placement allows quick change between tests



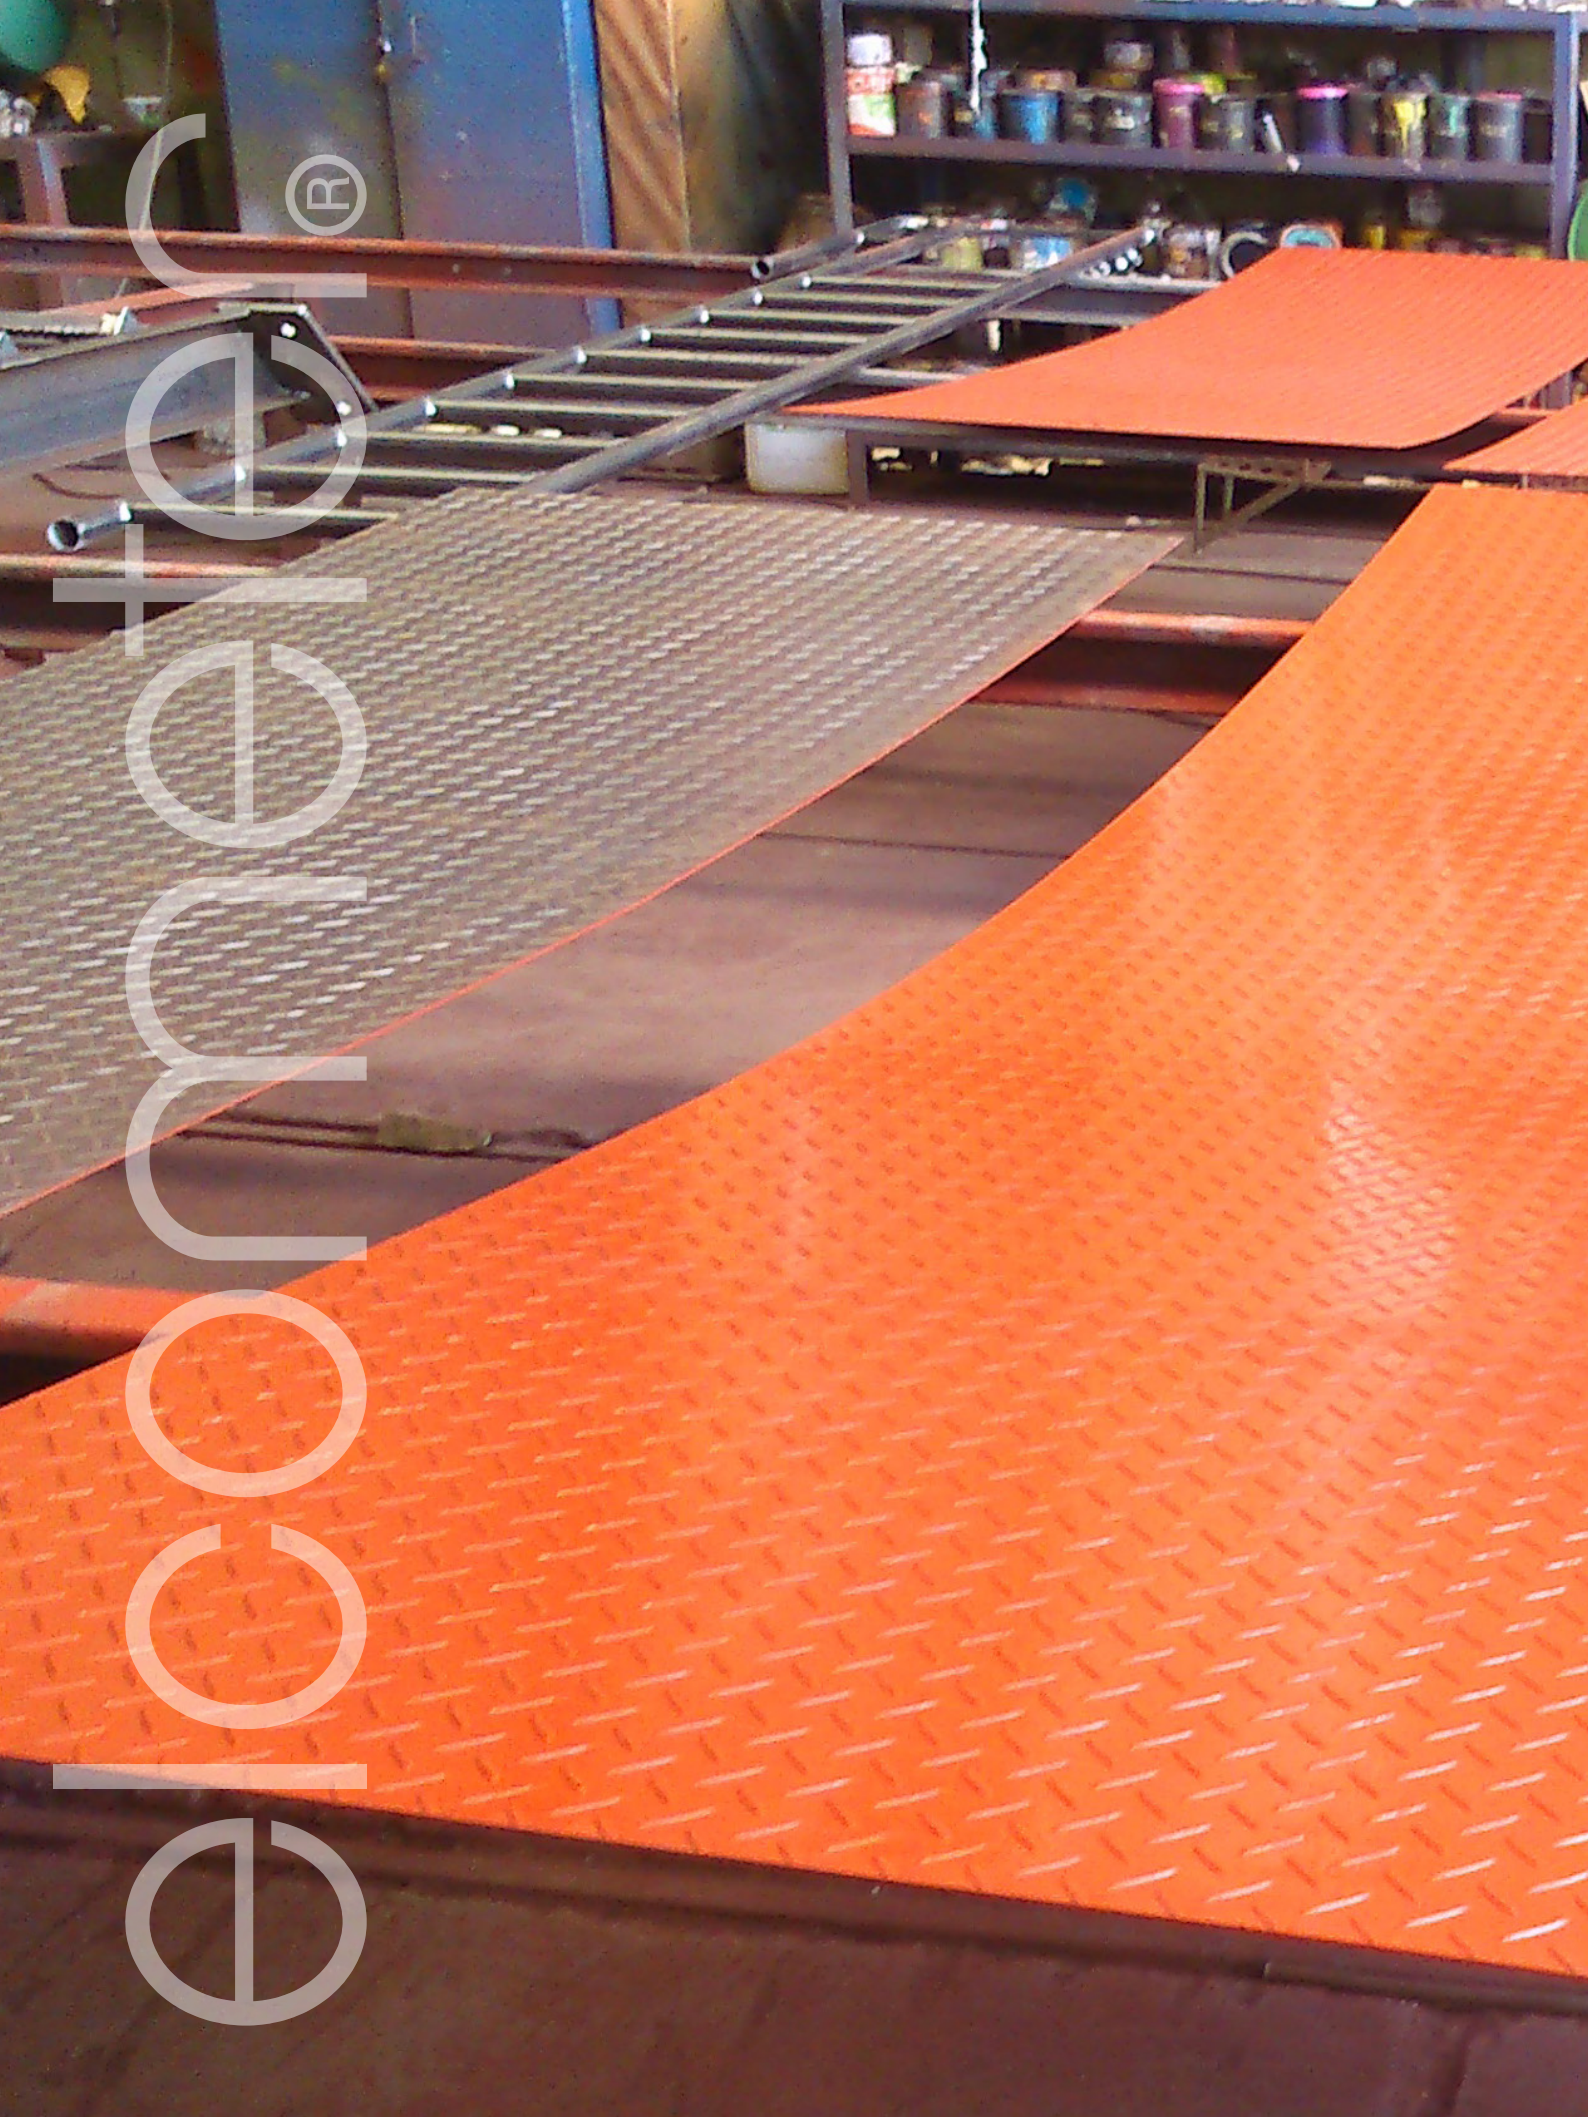




# Wet Film Thickness



6



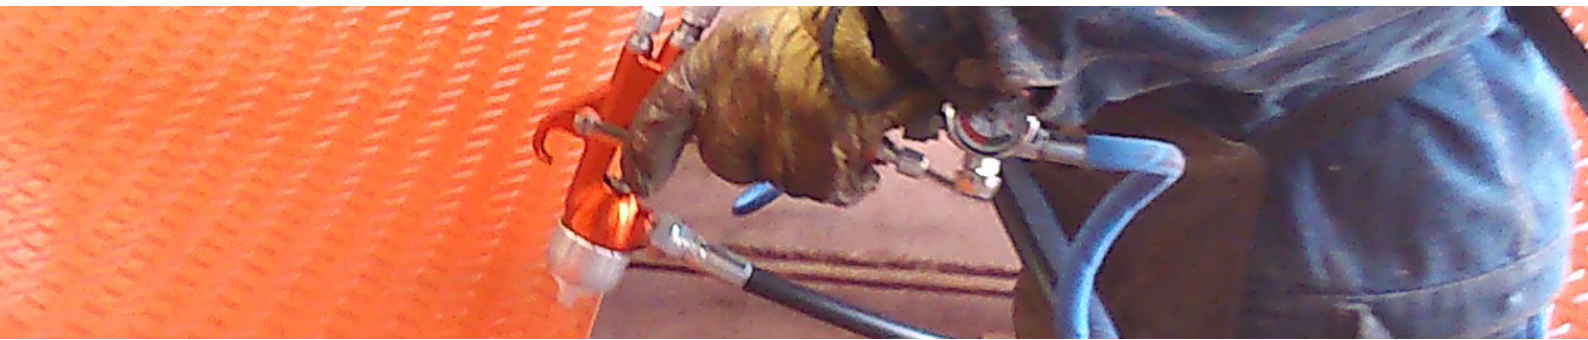

**When applying a liquid coating, by measuring the uncured film thickness, it is possible to determine the eventual dry film thickness. Applying too much coating wastes time and materials. It can also affect the performance and finish of the product.**

Too much wet film can cause the coating to crack as it cures; too little coating increases the risk that the substrate will not be sufficiently protected, leading to rust spots.

The three methods for measuring wet film thickness are:


- Wet Film Combs
- Wet Film Wheels

In each case, the thickness of the coating is measured and the dry film thickness can be estimated using the coating's solid : wet ratio.

### Using a Wet Film Comb


Place a comb perpendicular to and touching the substrate. Hold the comb in position and wait a few seconds until the teeth are wet. Remove the comb from the film.

The wet film thickness lies between the highest value 'coated' or 'wet' tooth and the highest value 'uncoated' or 'dry' tooth.

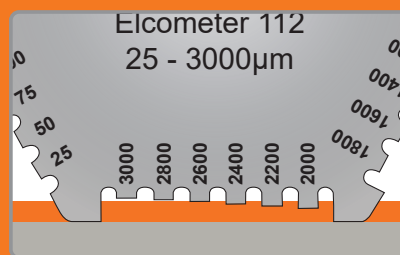

### Using a Wet Film Wheel

Roll the wheel through a wet coating, the centre wheel eventually touches the film. This point on the scale indicates the thickness. When the volume to solids ratio of the coating is known, generally found on a product data sheet, the wet film thickness can be used to predict the dry film thickness. Roll from maximum to minimum to avoid a false reading caused by surface tension.

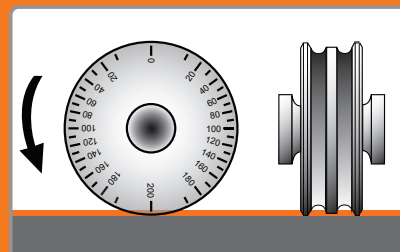



**Elcometer 112 & 3236****Hexagonal Wet Film Combs (Stainless Steel)**

These hexagonal precision formed stainless steel wet film combs are long lasting, reusable and supplied in a range of thicknesses measuring up to 3,000µm (120mils).

These six sided combs vary in size, giving either 24 or 36 measurement steps, depending upon the comb, thus providing increased accuracy.

**STANDARDS:**

ASTM D 4414-A, AS/NZS 1580.107.3,  
BS 3900-C5-7B, ISO 2808-1A,  
ISO 2808-7B, JIS K 5600-1-7,  
NF T30-125, US Navy PPI 63101-000,  
US Navy NSI 009-32

**Technical Specification**

| Part Number           | Range  | Values  | Certificate |
|-----------------------|--|---|-------------|
| K0003236M201          | 20 - 370µm   | 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 150, 170, 190, 210, 230, 250, 270, 290, 310, 330, 350, 370µm  | ○           |
| K0003236M202          | 25 - 2,000µm   | 25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1,000, 1,100, 1,200, 1,300, 1,400, 1,500, 1,600, 1,700, 1,800, 1,900, 2,000µm   | ○           |
| B112----1B            | 25 - 3,000µm   | 25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 1,000, 1,100, 1,200, 1,400, 1,600, 1,800, 2,000, 2,200, 2,400, 2,600, 2,800, 3,000µm | ○           |
| K0US3236M203          | 0.5 - 15mils   | 0.5, 0.75, 1.0, 1.25, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 8, 9, 10, 11, 12, 13, 14, 15mils  | ○           |
| K0US3236M204          | 1 - 80mils   | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16, 18, 20, 22, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 55, 60, 65, 70, 75, 80mils   | ○           |
| B112----2B            | 1 - 120mils  | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 26, 28, 30, 32, 34, 36, 38, 40, 45, 50, 55, 60, 70, 80, 90, 100, 110, 120mils  | ○           |
| Dimensions and Weight | Elcometer 3236 M201 / M203                             | 53 x 50 x 1mm (2.09 x 1.97 x 0.04"), 10g (0.35oz)   |             |
|                       | Elcometer 3236 M202 / M204                             | 77 x 90 x 1mm (2.95 x 3.54 x 0.04"), 22g (0.77oz)   |             |
|                       | Elcometer 112  | 75 x 65 x 1mm (2.95 x 2.54 x 0.04"), 20g (0.7oz)  |             |
| Packing List          | Wet Film Comb, storage case and operating instructions |   |             |

○ Optional Calibration Certificate available.

## Elcometer 115

## Wet Film Combs (Stainless Steel)



These reusable precision stainless steel combs are made to be long lasting and are supplied with either Metric or Imperial measurements.

Four separate thickness ranges are available up to a maximum of 1,250µm or 50mils and are manufactured to an accuracy of  $\pm 5\%$  of marked value or  $\pm 3\mu\text{m}$  (0.12mil), whichever is greater.

Each comb has 10 measurement steps (teeth).



### STANDARDS:

ASTM D 4414-A, AS/NZS 1580.107.3,  
BS 3900-C5-7B, ISO 2808-1A,  
ISO 2808-7B, JIS K 5600-1-7,  
NF T30-125, US Navy PPI 63101-000,  
US Navy NSI 009-32

### Technical Specification

| Metric Combs |               |   |             | Imperial Combs |            |   |             |
|--------------|---------------|---|-------------|----------------|------------|---|-------------|
| Part Number  | Range         | Measurement Steps                                       | Certificate | Part Number    | Range      | Measurement Steps                         | Certificate |
| B11529455M   | 20 - 325µm    | 20, 35, 50, 75, 100, 125, 175, 225, 275, 325µm          | ○           | B11529451E     | 1 - 13mils | 1, 1.5, 2, 3, 4, 5, 7, 9, 11, 13mils      | ○           |
| B11529456M   | 50 - 450µm    | 50, 75, 100, 150, 200, 250, 300, 350, 400, 450µm        | ○           | B11529452E     | 2 - 18mils | 2, 3, 4, 6, 8, 10, 12, 14, 16, 18mils     | ○           |
| B11529457M   | 50 - 750µm    | 50, 100, 150, 200, 250, 350, 450, 550, 650, 750µm       | ○           | B11529453E     | 2 - 30mils | 2, 4, 6, 8, 10*, 10*, 15, 20, 25, 30mils  | ○           |
| B11529458M   | 125 - 1,250µm | 125, 250, 375, 500, 625, 750, 875, 1,000, 1125, 1,250µm | ○           | B11529454E     | 5 - 50mils | 5, 10, 15, 20, 25, 30, 35, 40, 45, 50mils | ○           |
| B1152959WM   |               | Set of 4 Combs  | ○           | B1152959WE     |            | Set of 4 Combs                            | ○           |

\* Two 10mil values, one on each edge of the comb

## Elcometer 3238

## Long Edge Wet Film Combs (Stainless Steel)



These stainless steel combs are wire eroded to provide an accuracy  $\pm 5\%$  of marked value or  $\pm 3\mu\text{m}$  (0.12mil), whichever is greater, and are supplied with either Metric or Imperial measurements.

Each comb has 24 measurement steps (teeth) providing a more accurate wet film thickness value.




### STANDARDS:

ASTM D 4414-A, AS/NZS 1580.107.3,  
BS 3900-C5-7B, ISO 2808-1A,  
ISO 2808-7B, JIS K 5600-1-7,  
NF T30-125, US Navy PPI 63101-000,  
US Navy NSI 009-32

### Technical Specification

| Metric Combs |             |                   |             | Imperial Combs |              |                   |             |
|--------------|-------------|-------------------|-------------|----------------|--------------|-------------------|-------------|
| Part Number  | Range       | Measurement Steps | Certificate | Part Number    | Range        | Measurement Steps | Certificate |
| K0003238M201 | 5 - 120µm   | 5µm               | ○           | K0US3238M201   | 0.5 - 6mils  | 0.5mil            | ○           |
| K0003238M202 | 25 - 600µm  | 25µm              | ○           | K0US3238M202   | 1.0 - 24mils | 1.0mil            | ○           |
| K0003238M203 | 50 - 1200µm | 50µm              | ○           | K0US3238M203   | 2.0 - 48mils | 2.0mil            | ○           |
| K0003238M204 |             | Set of 3 Combs    | ○           | K0US3238M204   |              | Set of 3 Combs    | ○           |

○ Optional Calibration Certificate available.

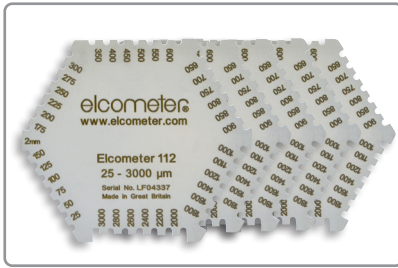**Elcometer 112AL****Punched Wet Film Combs (Aluminium)**

These punched aluminium combs offer the user a low cost method of measuring the wet film thickness.

The Elcometer 112AL, being punched from aluminium, is not as accurate as precision formed stainless steel wet film combs and has a shorter lifespan.

Supplied in a pack of 10 combs, each comb has Metric (25 - 3,000µm) on one side and Imperial (1 - 118mils) on the other.

**STANDARDS:**

ASTM D 4414-A, AS/NZS 1580.107.3,  
BS 3900-C5-7B, ISO 2808-1A,  
ISO 2808-7B, JIS K 5600-1-7,  
NF T30-125, US Navy PPI 63101-000,  
US Navy NSI 009-32

The Elcometer 112AL can be customised with your logo. Please contact Elcometer for further details.

**Technical Specification**

| Part Number          | Description   |
|----------------------|---|
| <b>B112AL12473-3</b> | Elcometer 112AL Aluminium Wet Film Comb (Pack of 10)    |
| Dimensions           | 75 x 65 x 1mm (2.95 x 2.56 x 0.04")                     |
| Weight               | 90g (3.17oz)  |
| Packing List         | Elcometer 112AL (Pack of 10) and operating instructions |

**Elcometer 154****Plastic Wet Film Combs**

The Elcometer 154 Wet Film Combs are made from ABS plastic and are designed to be used once and kept as a record of wet film thickness measurement for quality assurance or customer requirements.

Metric and Imperial values are on the same comb, 50 to 800µm on one side, 2 to 32mils on the other.

Supplied in a pack containing 500 combs. Each comb has 16 measurement steps.

**STANDARDS:**

BS 3900-C5-7B, ISO 2808-1A,  
ISO 2808-7B, JIS K 5600-1-7,  
NF T30-125

**Technical Specification**

| Part Number      | Description   |
|------------------|---|
| <b>B154----1</b> | Elcometer 154 Plastic Wet Film Combs (Pack of 500)                    |
| Dimensions       | 40 x 40mm (1.57 x 1.57")  |
| Weight           | 900g (2lb)  |
| Packing List     | Elcometer 154 Wet Film Combs (Pack of 500) and operating instructions |



## Elcometer 3230

## Wet Film Wheels



The Elcometer 3230 Wet Film Wheel is a high precision, accurate and easy to use instrument which consists of a set of three wheels. The central wheel is of a smaller diameter and is eccentric relative to the two outer wheels. By rolling the gauge through a wet coating, the centre wheel eventually touches the film. This point on the scale indicates the thickness.

A convenient mounting handle for the wheel is available in two lengths; 15cm (6") or 50cm (19"); please order separately.

When the volume to solids ratio of the coating is known (generally found on the product data sheet supplied by the manufacturer), the wet film thickness can be used to predict the dry film thickness.

Several measurement ranges between 0 to 25µm and 0 to 1,000µm (0 to 1mil and 0 to 40mils) are available.

- Continuous scale produces measurement accuracy of  $\pm 5\%$  of marked value or  $\pm 3\mu\text{m}$  (0.12mil), whichever is greater
- Suitable for flat and curved surfaces

### STANDARDS:

ASTM D 1212-A, AS/NZS 1580.107.3,  
BS 3900-C5-7A, ISO 2808-1B,  
ISO 2808-7A, JIS K 5600-1-7,  
NF T30-125



## Technical Specification

| Metric Film Wheels |   |             |             | Imperial Film Wheels |               |             |             |
|--------------------|---|-------------|-------------|----------------------|---------------|-------------|-------------|
| Part Number        | Range   | Graduations | Certificate | Part Number          | Range         | Graduations | Certificate |
| K0003230M001       | 0 - 25µm  | 1.25µm      | ○           | K0US3230M001         | 0 - 1mil      | 0.05mil     | ○           |
| K0003230M016       | 0 - 40µm  | 2.0µm       | ○           | -                    | -             | -           | ○           |
| K0003230M002       | 0 - 50µm  | 2.5µm       | ○           | K0US3230M002         | 0 - 2mils     | 0.10mil     | ○           |
| K0003230M003       | 0 - 100µm   | 5.0µm       | ○           | K0US3230M003         | 0 - 4mils     | 0.20mil     | ○           |
| K0003230M004       | 0 - 150µm   | 7.5µm       | ○           | K0US3230M004         | 0 - 6mils     | 0.25mil     | ○           |
| K0003230M005       | 0 - 200µm   | 10.0µm      | ○           | -                    | -             | -           | ○           |
| K0003230M006       | 0 - 250µm   | 12.5µm      | ○           | -                    | -             | -           | ○           |
| K0003230M007       | 0 - 300µm   | 15.0µm      | ○           | K0US3230M005         | 0 - 12mils    | 0.50mil     | ○           |
| K0003230M008       | 0 - 400µm   | 20.0µm      | ○           | -                    | -             | -           | ○           |
| K0003230M009       | 0 - 500µm   | 25.0µm      | ○           | K0US3230M006         | 0 - 20mils    | 1.0mil      | ○           |
| K0003230M010       | 0 - 1000µm  | 50.0µm      | ○           | K0US3230M007         | 0 - 40mils    | 2.0mils     | ○           |
| Dimensions         | 50 x 30mm (1.97 x 1.18")                                |             |             | Weight               | 220g (7.76oz) |             |             |
| Packing List       | Wet Film Wheel, storage case and operating instructions |             |             |                      |               |             |             |

## Accessories

|              |                                  |
|--------------|----------------------------------|
| KT003230N003 | 15cm (6") Wet Film Wheel Handle  |
| KT003230N002 | 50cm (19") Wet Film Wheel Handle |

○ Optional Calibration Certificate available.



Test your coating's adhesion **quickly** and **accurately** at the press of a button with the **Elcometer 510** Automatic Adhesion Gauge.

See page 8-6



elcometer®







# Dry Film Thickness

Digital Gauges

7-6

Mechanical Gauges

7-42

Foils & Standards


7-46

Destructive Gauges

7-52

7



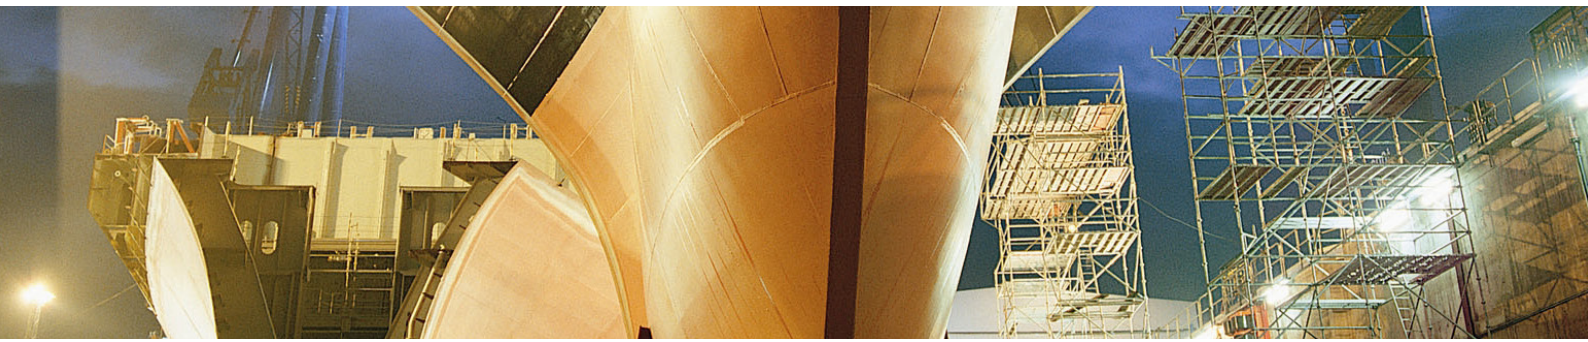

**Dry Film Thickness is probably the most critical measurement in the coatings industry. It provides vital information as to the expected life of the substrate, the product's fitness for purpose and its appearance. It also ensures compliance with a host of International Standards.**

A 'dry film' is the coating on a surface which has cured as the solvent has evaporated and the coating is dry to touch. The coating is typically a paint, a varnish or a powder. But it can be any substance applied to a substrate. A dry film thickness (DFT) gauge, often referred to as a coating thickness gauge, can be used to measure the thickness of coatings when dry.

There are three types of dry film thickness gauges; destructive, mechanical and digital. In 1947, Elcometer launched one of the world's first non-destructive coating thickness gauges, the Elcometer 101, and over the last 7 decades, Elcometer have developed a comprehensive range of destructive, mechanical and digital Dry Film Thickness gauges to meet all of your coating inspection requirements.

#### **Coating Thickness Standards**

There are two types of coating thickness standards available from Elcometer:

**Calibration Foils;** supplied individually or in sets, these precision foils (or 'shims'), accurately measured to  $\pm 1\%$ , offer you the ideal method for adjusting the calibration of your coating thickness gauge on your substrate, taking into account your specific substrate material, surface finish and form, to ensure the greatest possible accuracy. Foils are available with or without a calibration certificate traceable to National Standards (UKAS and NIST).

**Zero Test Plates;** in some cases, it may be difficult or impractical to obtain an uncoated substrate. For this reason, Elcometer provide a range of zero test plates. These test plates, when used in conjunction with a set of foils, are ideal for accurately measuring the performance of your coating thickness gauge.

# Choose the correct Thickness Gauge for your dry film thickness measurement

## Digital Gauges

- The most accurate and reliable method for metal and cementitious substrates
- Incredible accuracy and super-fast measurement
- For use on almost any metallic substrate, whether ferrous or non-ferrous
- Compatible with ElcoMaster® data management software to import measurements at a click of a button



## Mechanical Gauges

- Used in areas where electrical instruments are not permitted or temperatures are high
- For measurement on ferrous substrates
- Quick and immediate results

## Destructive Gauges

- For measurement on non-metallic substrates or assessing the thickness of a multi-coat paint
- Low cost, portable and easy to use











# Dry Film Thickness

Digital Gauges

7-6

Mechanical Gauges

7-42

Foils & Standards

7-46

Destructive Gauges

7-52

7



### Elcometer 456

### Separate Coating Thickness Gauge

The **Elcometer 456** Coating Thickness Gauge is available with a wide range of interchangeable probes; providing greater coating thickness measurement flexibility on metal substrates.

Measure coatings up to 31mm (1,220mils) on metal substrates

Easy to read, user definable display with automatic screen brightness

Ergonomic design, ideal for continuous use

Dust and waterproof rugged design equivalent to IP64

Temperature stable measurements





**Elcometer 456****Separate Coating Thickness Gauge**

Large easy to read measurements in Metric and Imperial units



Halve the inspection time using the scan probe



View up to 8 user selectable statistics on screen



Rugged and reliable, ideal for harsh environments

**Fast**

Helping you become more efficient

70+ readings per minute and 140+ per minute with Scan Probe, multiple calibration memories and alphanumeric batch identification.

**Accurate**

Accurate measurements on smooth, rough, thin and curved surfaces

Measures on smooth, rough, thin and curved surfaces to  $\pm 3\%$  or  $2.5\mu\text{m}$ , in accordance with National & International Standards.

**Easy**

Large buttons and colour screen

LCD screen with auto rotate; factory calibrated with high and low reading limit indicators in multiple languages.

**Reliable**

Designed to last


Heavy duty, impact resistant and supplied with fully traceable test certificates and our 2 year gauge warranty\*.

**Powerful**

Store up to 150,000 readings in upto 2,500 batches

Measures up to 31mm (1,220mils) of coating on metal substrates with USB and Bluetooth® data output making it compatible with ElcoMaster® software.

For a wide range of probes to meet your specific application, see page 7-12

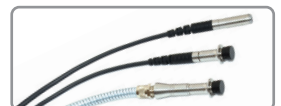

\* The Elcometer 456 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

**Elcometer 456**

**Separate Coating Thickness Gauge**

**Scan and Auto Repeat Modes**



**Using the Scan Probe in Scan Mode**

Using the Elcometer 456 with the Scan Probe in scan mode enables users to significantly reduce dry film thickness inspection times without affecting accuracy:

- Slide the Scan Probe over the entire surface area, as the probe is lifted off the surface the gauge displays the average coating thickness value, the highest thickness and the lowest thickness values.
- Each set of three readings (average, high and low) can be displayed on the run graph and stored into the memory.
- During each scan the Elcometer 456 displays the live thickness reading together with an analogue bar graph which graphically indicates the thickness relative to both the nominal thickness and any user-defined limits.



**Using the Scan Probe in Auto Repeat Mode**

When the Scan Probe is slid over the coated surface in Auto Repeat Mode\*, a coating thickness reading is taken approximately every half a second. Each individual dry film thickness reading is stored into the memory.

With a reading rate in excess of 140 readings per minute, the Auto Repeat Mode can significantly speed up the dry film thickness inspection of large coated areas.



\* Scan and Auto Repeat Modes require an Elcometer 456 Model T gauge with Scan Probe.

**Elcometer 456****Separate Coating Thickness Gauge****Scan Probes**

The Scan Probes further enhance the speed and accuracy of field based dry film coating thickness measurement:


- Featuring a highly durable 'snap on' replaceable probe cap
- A revolutionary design which allows users to take individual readings or rapidly scan large surface areas - without damaging the probe or coating
- Any cap wear during use<sup>1</sup> is incorporated within the calibration process - the gauge even informs the user when to replace the cap.
- Standard Scan Probe or larger Roller Bearing Scan Probe available
- Roller Bearing Scan Probe is ideal for large coated structures, abrasive coatings and pre-construction primers.

**Counted Average and Fixed Batch Modes****Counted Average Mode**


- The Elcometer 456 Model S and Model T are supplied with the Counted Average Mode
- Once the user has defined the number of individual gauge readings to be taken within a spot measurement, the gauge stores the average of the individual gauge readings into the memory.

**Fixed Batch Sizes**

- The Fixed Batch Size feature within the Elcometer 456 Model T allows users to define the maximum number of readings in each batch.
- Once the maximum number of readings has been reached the gauge automatically opens up a new batch which is linked to the previous batch (name-1, name-2, etc.).

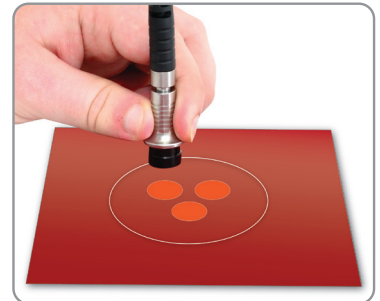**Working with Standards and Test Methods**

- International Standards and test methods often describe the number of individual gauge readings to be taken in a spot measurement and/or the number of spot measurements required over a defined surface area.
- SSPC PA2 requires a minimum of three gauge readings to be taken per spot measurement and five spot measurements over 10m<sup>2</sup> (~100ft<sup>2</sup>).
- The Elcometer 456 Model S or Model T can be set with a counted average of three and a fixed batch size of five to meet these requirements. Each batch defines an area of measurement.
- When the Scan Probe is connected to the Elcometer 456 Model T with Auto Repeat Mode selected, SSPC PA2 (or similar test methods) can be completed more than 40% faster.

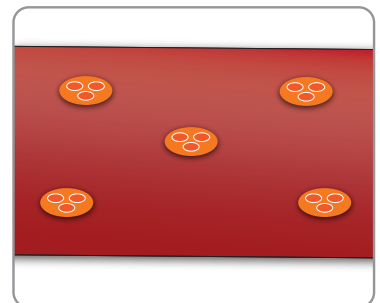

<sup>1</sup> When tested on smooth surfaces probe end caps have been scanned in excess of 50km (30 miles)



## Elcometer 456

## Separate Coating Thickness Gauge

### Product Features

■ Standard

□ Optional

|  | Model B               | Model S               | Model T               |
|--|-----------------------|-----------------------|-----------------------|
| Fast, accurate reading rate; <i>70+ readings per minute</i>  | ■                     | ■                     | ■                     |
| Repeatable & reproducible measurements   | ■                     | ■                     | ■                     |
| Easy to use menu structure; <i>in 30+ languages</i>  | ■                     | ■                     | ■                     |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>  | ■                     | ■                     | ■                     |
| Bright colour screen; <i>with permanent backlight</i>  | ■                     | ■                     | ■                     |
| Scratch & solvent resistant display; <i>2.4" (6cm) TFT</i>   | ■                     | ■                     | ■                     |
| Large positive feedback buttons  | ■                     | ■                     | ■                     |
| USB power supply; <i>via PC</i>  | ■                     | ■                     | ■                     |
| Test certificate   | ■                     | ■                     | ■                     |
| 2 year gauge warranty <sup>1</sup>   | ■                     | ■                     | ■                     |
| Automatic rotating display; <i>0°, 90°, 180° &amp; 270°</i>  | ■                     | ■                     | ■                     |
| Ambient light sensor; <i>with adjustable auto brightness</i>   | ■                     | ■                     | ■                     |
| Emergency light  | ■                     | ■                     | ■                     |
| Tap awake from sleep   | ■                     | ■                     | ■                     |
| Gauge software updates <sup>2</sup> ; <i>via ElcoMaster® software</i>  | ■                     | ■                     | ■                     |
| Data output  | ■                     | ■                     | ■                     |
| USB; <i>to computer</i>  | ■                     | ■                     | ■                     |
| Bluetooth®; <i>to computer, Android™ &amp; iOS<sup>3</sup> devices</i>   |                       | ■                     | ■                     |
| On screen statistics   | ■                     | ■                     | ■                     |
| Number of readings; $\eta$ Mean (average); $\bar{x}$ Standard deviation; $\sigma$  | ■                     | ■                     | ■                     |
| Highest reading; <i>Hi</i> Lowest reading; <i>Lo</i> Coefficient of variation; <i>CV%</i> ,<br>Elcometer index value <sup>4</sup> ; <i>EIV</i> |                       |                       |                       |
| Nominal dry film thickness; <i>NDFT</i>  |                       | ■                     | ■                     |
| IMO PSPC; <i>%&gt;NDFT, %&gt;90&lt;NDFT, 90:10 pass/fail</i>   |                       | ■                     | ■                     |
| High & low limits; <i>definable audible &amp; visual alarms</i>  |                       | ■                     | ■                     |
| Number of readings above high limit;   |                       | ■                     | ■                     |
| Number of readings below low limit;  |                       | ■                     | ■                     |
| Live reading trend graph; <i>in Batch Mode</i>   |                       | ■                     | ■                     |
| ElcoMaster® software & USB cable   | □                     | ■                     | ■                     |
| Replaceable screen protectors  | □                     | ■                     | ■                     |
| Protective case  | ■                     | ■                     | ■                     |
| Plastic transit case   | □                     | □                     | ■                     |
| Separate models; <i>with automatic probe recognition</i>   | ■                     | ■                     | ■                     |
| Probe type; <i>Ferrous (F), Non-Ferrous (N), Dual (FNF)</i>  | F, N, FNF             | F, N, FNF             | F, N, FNF             |
| Measurement range; <i>see page 7-12 for probe selection</i>  | 0-31mm<br>0-1,220mils | 0-31mm<br>0-1,220mils | 0-31mm<br>0-1,220mils |
| On screen calibration instructions; <i>in 30+ languages</i>  | ■                     | ■                     | ■                     |
| Multiple calibration methods   | ■                     | ■                     | ■                     |
| Factory; <i>resets to the factory calibration</i>  | ■                     | ■                     | ■                     |
| 2-point; <i>for smooth and rough surfaces</i>  | ■                     | ■                     | ■                     |
| 1-point; <i>zero calibration</i>   | ■                     | ■                     | ■                     |
| Zero offset; <i>for calibration according to ISO19840</i>  |                       | ■                     | ■                     |
| Predefined calibration & measurement methods   |                       | ■                     | ■                     |
| ISO, SSPC PA2, Swedish, Australian   |                       | ■                     | ■                     |

<sup>1</sup> The Elcometer 456 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>2</sup> Internet connection required

<sup>3</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.

<sup>4</sup> Elcometer Index Values are used in the automotive industry to assess a coating's overall quality; USA Patent Number US7606671B2

**Elcometer 456****Separate Coating Thickness Gauge****Product Features**

■ Standard

□ Optional

|   | Model B | Model S | Model T |
|---|---------|---------|---------|
| Automatic calibration; <i>for rapid calibration</i>                       |         | ■       | ■       |
| Calibration memory type; <i>gauge (g) or gauge &amp; batch (gb)</i>       | g       | gb      | gb      |
| Number of batches; <i>with unique calibrations</i>                        |         | 1       | 2,500   |
| Calibration memories; <i>3 user-programmable memories</i>                 |         |         | ■       |
| Measurement outside calibration warning                                   |         |         | ■       |
| Calibration lock; <i>with optional PIN code unlock</i>                    | ■       | ■       | ■       |
| Delete last reading   | ■       | ■       | ■       |
| Gauge memory; <i>number of readings</i>                                   | Last 5  | 1,500   | 150,000 |
| Individual batch calibrations; <i>sent to PC via ElcoMaster® software</i> |         | ■       | ■       |
| Limits; <i>user definable audible &amp; visual pass/fail warnings</i>     |         | ■       | ■       |
| Gauge (g) or gauge & batch specific (gb) limits                           |         | g       | gb      |
| Date and time stamp   |         | ■       | ■       |
| Review, clear & delete batches  |         | ■       | ■       |
| Batch types; <i>normal, counted average, IMO PSPC</i>                     |         | ■       | ■       |
| Navsea Mode   |         |         | ■       |
| Batch review graph  |         |         | ■       |
| Copy batches and calibration settings                                     |         |         | ■       |
| Alpha-numeric batch names; <i>user definable on the gauge</i>             |         |         | ■       |
| Scan & Auto Repeat Modes; <i>with Scan Probe connected</i>                |         |         | ■       |
| Fixed Batch Size Mode; <i>with batch linking</i>                          |         |         | ■       |

**Technical Specification**

| Model                                       | Model B   | Model S    | Model T    | Certificate |
|---|---|------------|------------|-------------|
| Elcometer 456 Ferrous Separate              | A456CFBS  | A456CFSS   | A456CFTS   | ●           |
| Elcometer 456 Non-Ferrous Separate          | A456CNBS  | A456CNSS   | A456CNTS   | ●           |
| Elcometer 456 Dual FNF Separate             | A456CFNFBS  | A456CFNFSS | A456CFNFTS | ●           |
| Display Information                         | 2.4" (6cm) QVGA colour TFT display, 320 x 240 pixels  |            |            |             |
| Battery Type                                | 2 x AA batteries, rechargeable batteries can also be used   |            |            |             |
| Battery Life                                | approximately 24 hours of continuous use at 1 reading per second*   |            |            |             |
| Gauge Dimensions (h x w x d)                | 141 x 73 x 37mm (5.55 x 2.87 x 1.46")   |            |            |             |
| Gauge Weight (including batteries supplied) | 161g (5.68oz)   |            |            |             |
| Operating Temperature                       | -10 to 50°C (14 to 122°F)   |            |            |             |
| Packing List                                | Elcometer 456 gauge, wrist harness, transit case (T), protective case (B, S, T), 1 x screen protector (S, T), 2 x AA batteries, operating instructions, USB cable (S, T), ElcoMaster® software (S, T)<br>For separate gauge probe options see page 7-12 |            |            |             |

**STANDARDS:**

AS 2331.1.4, AS 3894.3-B, AS/NZS 1580.108.1, ASTM B244, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 7091, ASTM E 376, ASTM G 12, BS 3900-C5-6B, BS 3900-C5-6A, BS 5411-11, BS 5411-3, BS 5599, DIN 50981, DIN 50984, ECCA T1, EN 13523-1, IMO MSC.215(82), IMO MSC.244 (83), ISO 1461, ISO 19840, ISO 2063, ISO 2178, ISO 2360, ISO 2808-6A, ISO 2808-6B, ISO 2808-7C, ISO 2808-7D, ISO 2808-12, JIS K 5600-1-7, NF T30-124, SS 184159, SSPC PA 2, US Navy PPI 63101-000, US Navy NSI 009-32

\* Using default settings &amp; lithium batteries, alkaline or rechargeable batteries may differ

● Certificate supplied as standard

**Elcometer 456**

**Probe Range for Separate Coating Thickness Gauge**

All **Elcometer 456 probes** are available in a number of designs and scale ranges to meet your specific application.



Fully interchangeable and available in a number of designs and scale ranges

Supplied with a Test Certificate and a set of calibration foils

Ferrous, non-ferrous and dual FNF probes available

Ergonomic design, ideal for continuous use

Temperature stable measurements




**Elcometer 456****Probe Range for Separate Coating Thickness Gauge**

Choosing the correct probe for your coating thickness gauge:

**Ferrous Probes (F)**

- Ferrous probes measure non-magnetic coatings on ferromagnetic substrates.
- Elcometer 456 ferrous gauges accept any ferrous probe.

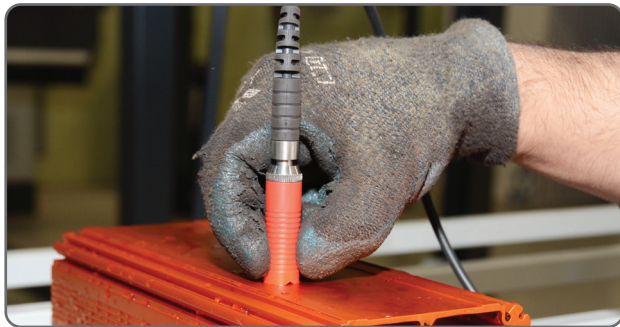**Non-Ferrous Probes (N)**

- Non-ferrous probes measure non-conductive coatings on non-ferrous metal substrates.
- Elcometer 456 non-ferrous gauges accept any non-ferrous probe.

**Dual Probes (FNF)**

- Dual FNF probes measure both ferrous and non-ferrous applications with automatic substrate detection.
- Elcometer 456 FNF gauges accept all ferrous, non-ferrous and dual FNF probes.

**High Temperature**

- Elcometer probes have a maximum operating temperature of 80°C (176°F)\*.
- Separate ferrous probes have a maximum operating temperature of 150°C (300°F)\*.
- Hi-Temperature PINIP™ has a maximum operating temperature of 250°C (480°F)\*.

To find out if you should be using a ferrous or non-ferrous probe, see page 7-25



\*The stated temperature is the substrate temperature, and the duty cycle of the probe must be reduced to ensure a minimal temperature build-up within the probe.

**Elcometer 456**

**Probe Range for Separate Coating Thickness Gauge**


Choosing the correct probe for your coating thickness gauge:

**Straight Probes**




**Standard Straight Probe**

Standard probes measure coatings on both flat and curved surfaces.

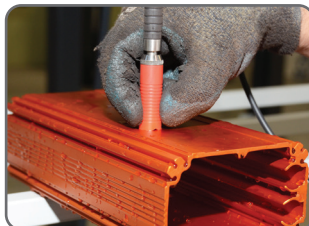

**Anodising Probe**

Chemical resistant & washable - ideal for the anodising environment.

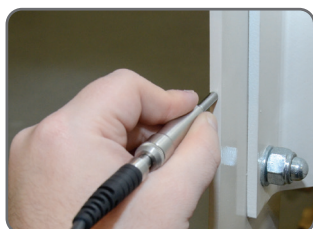

**Mini Probe**

Mini probes are ideal for harder to reach areas and edges.



**Waterproof Probe**

Sealed for use underwater at depth, even in diving gloves.



**Soft Coating Probe**

Large surface area probes are for soft materials (HVCA approved).



**Thick Coatings Probe**


Ideal for measuring coatings up to 31mm thick.

**Scan Probes**



**Standard Scan Probe**

Rapidly scan large surface areas without damaging the probe or the coating.

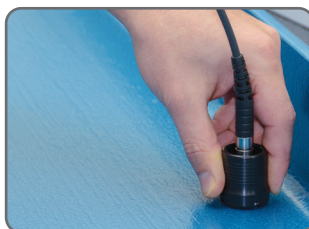

**Ball Bearing Scan Probe<sup>1</sup>**

Clip on adaptors for large coated structures, abrasive coatings and pre-construction primers.


<sup>1</sup> UK Patent Number: 2571577

**Elcometer 456****Probe Range for Separate Coating Thickness Gauge**


Choosing the correct probe for your coating thickness gauge:

**Angled Probes****Right Angle Probe**


Take readings in areas with restricted clearance.

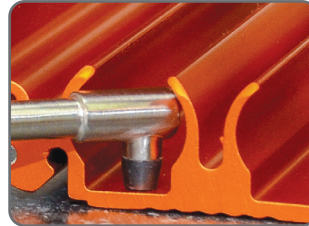**Mini Right Angle Probe**

For measuring coatings on edges, narrow pipes or small surface areas.

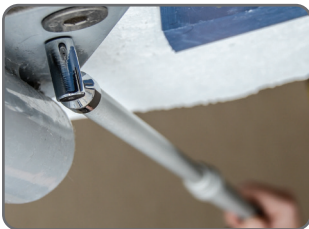**Telescopic Probe**

Extending probes for hard to reach areas.

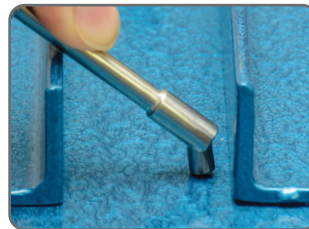**45° Angle Probe**


Measure difficult to access or complex areas.

**Plug In Integral Probes (PINIP™)****PINIP™ Integral Probe**

Transforms a separate gauge into an integral gauge, ideal for single handed use.

**Hi-Temperature PINIP™**

Measure coatings on ferrous substrates up to 250°C (480°F).

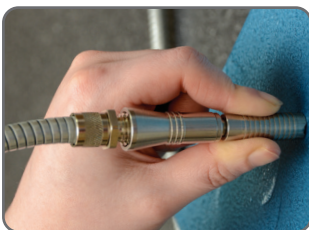**Armoured Cable Probes****F / FNF Armoured Probe**

Reinforced heavy duty cables reduce the risk of cable damage.



Elcometer 456

Probe Range for Separate Coating Thickness Gauge

Scale 0.5 Probe Range 0-500µm / 0-20mils




|                         |                                  |                                      |
|-------------------------|----------------------------------|--------------------------------------|
| Accuracy <sup>a</sup> : | ±1-3% or ±2.5µm                  | ±1-3% or ±0.1mil                     |
| Range:                  | 0-500µm                          | 0-20mils                             |
| Resolution:             | 0.1µm: 0-100µm<br>1µm: 100-500µm | 0.01mil: 0-5mils<br>0.1mil: 5-20mils |
| Certificate:            | ●                                |                                      |

See '#' on the probes table on the opposite page for comparison.



a. Whichever is the greater  
b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode  
● Certificate supplied as standard.

c. Probe length is measured from X to Y  
d. for Elcometer 456 Model T gauges only  
Elcometer 456 probes are covered by a 1 year warranty



**Elcometer 456****Probe Range for Separate Coating Thickness Gauge****Scale 0.5 Probe Range****0-500µm / 0-20mils****Ferrous (F) Probes**


| # | Description            | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|------------------------|---------------------------|--------------|------------------|--------------------------------------|
| 2 | 45° Angle Mini Probe   | 300mm (11.80")            | T456CFM3R45D | 18mm (0.71")     | 3mm (0.12")                          |
| 3 | Right Angle Mini Probe | 300mm (11.80")            | T456CFM3R90D | 16mm (0.63")     | 3mm (0.12")                          |
| 4 | Right Angle Mini Probe | 150mm (5.90")             | T456CFM3R90C | 16mm (0.63")     | 3mm (0.12")                          |
| 5 | Straight Mini Probe    | 150mm (5.90")             | T456CFM3---C | 6mm (0.24")      | 3mm (0.12")                          |
| 6 | 45° Angle Mini Probe   | 45mm (1.77")              | T456CFM3R45A | 16mm (0.63")     | 3mm (0.12")                          |
| 7 | Right Angle Mini Probe | 45mm (1.77")              | T456CFM3R90A | 16mm (0.63")     | 3mm (0.12")                          |
| 8 | Straight Mini Probe    | 45mm (1.77")              | T456CFM3---A | 6mm (0.24")      | 3mm (0.12")                          |

**Non-Ferrous (N) Probes**

| # | Description            | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|------------------------|---------------------------|--------------|------------------|--------------------------------------|
| 1 | Right Angle Mini Probe | 400mm (15.70")            | T456CNM3R90E | 16mm (0.63")     | 4mm (0.16")                          |
| 4 | Right Angle Mini Probe | 150mm (5.90")             | T456CNM3R90C | 16mm (0.63")     | 4mm (0.16")                          |
| 5 | Straight Mini Probe    | 150mm (5.90")             | T456CNM3---C | 6mm (0.24")      | 4mm (0.16")                          |
| 7 | Right Angle Mini Probe | 45mm (1.77")              | T456CNM3R90A | 16mm (0.63")     | 4mm (0.16")                          |
| 8 | Straight Mini Probe    | 45mm (1.77")              | T456CNM3---A | 6mm (0.24")      | 4mm (0.16")                          |

**Non-Ferrous - Graphite (N)**

| # | Description            | Probe Length <sup>c</sup> | Part Number   | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|------------------------|---------------------------|---------------|------------------|--------------------------------------|
| 1 | Right Angle Mini Probe | 400mm (15.70")            | T456CNMG3R90E | 16mm (0.63")     | 4mm (0.16")                          |
| 4 | Right Angle Mini Probe | 150mm (5.90")             | T456CNMG3R90C | 16mm (0.63")     | 4mm (0.16")                          |
| 7 | Right Angle Mini Probe | 45mm (1.77")              | T456CNMG3R90A | 16mm (0.63")     | 4mm (0.16")                          |

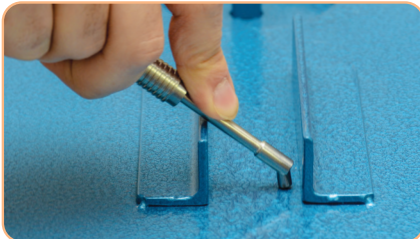**Scale FM7 Probe Range****0.6-3.8mm / 25-150mils**

|                              |                             |   |
|------------------------------|-----------------------------|---|
| <b>Accuracy<sup>a</sup>:</b> | ±7.5% or ±114µm             | ±7.5% or ±4.5mils                           |
| <b>Range<sup>d</sup>:</b>    | 0.60-3.8mm                  | 25-150mils                                  |
| <b>Resolution:</b>           | 1µm: 0-1mm<br>10µm: 1-3.8mm | 0.1mil: 0-139.3mils<br>1.0mil: 39.4-150mils |
| <b>Certificate:</b>          | •                           |   |

**Ferrous (F) Probes**

| # | Description          | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|----------------------|---------------------------|--------------|------------------|--------------------------------------|
| 6 | 45° Angle Mini Probe | 45mm (1.77")              | T456CFM7R45A | 20mm (0.79")     | 6.5 mm (0.26")                       |

Elcometer 456

Probe Range for Separate Coating Thickness Gauge

Scale 1 Probe Range 0-1500µm / 0-60mils



|                          |                                    |                                      |
|--------------------------|------------------------------------|--------------------------------------|
| Accuracy <sup>ae</sup> : | ±1-3% or ±2.5µm                    | ±1-3% or ±0.1mil                     |
| Range <sup>d</sup> :     | 0-1,500µm                          | 0-60mils                             |
| Resolution:              | 0.1µm: 0-100µm<br>1µm: 100-1,500µm | 0.01mil: 0-5mils<br>0.1mil: 5-60mils |
| Certificate:             | ●                                  |                                      |

See '#' on the probes table on the opposite page for comparison.



a. Whichever is the greater  
b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode  
● Certificate supplied as standard.

c. Probe length is measured from X to Y  
d. Excluding Scan Probe end cap  
e. Scan Probe calibrated using a sample of the uncoated substrate  
Elcometer 456 probes are covered by a 1 year warranty



## Elcometer 456

## Probe Range for Separate Coating Thickness Gauge

## Ferrous (F) Probes

| # | Description                     | Probe Length <sup>c</sup> | Part Number     | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|---------------------------------|---------------------------|-----------------|------------------|--------------------------------------|
| 1 | Straight Probe                  | 45mm (1.77")              | T456CF1S        | 85mm (3.35")     | 4mm (0.16")                          |
| 1 | Straight Probe sealed           | 45mm (1.77")              | T456CF1E        | 85mm (3.35")     | 4mm (0.16")                          |
| 2 | Scan Probe                      | 45mm (1.77")              | T456CF1U        | 86mm (3.38")     | 15mm (0.59")                         |
| 3 | Scan Probe armoured             | 45mm (1.77")              | T456CF1UARM     | 140mm (5.51")    | 15mm (0.59")                         |
| 4 | 90° Probe                       | 45mm (1.77")              | T456CF1R        | 28mm (1.10")     | 4mm (0.16")                          |
| 5 | 90° Mini Probe                  | 45mm (1.77")              | T456CFM5R90A    | 16mm (0.63")     | 4mm (0.16")                          |
| 5 | 90° Mini Probe sealed           | 45mm (1.77")              | T456CFME5R90A   | 16mm (0.63")     | 4mm (0.16")                          |
| 5 | 90° Mini Probe sealed, 2m cable | 45mm (1.77")              | T456CFME5R90A-2 | 16mm (0.63")     | 4mm (0.16")                          |
| 6 | PINIP™ Integral Probe           |                           | T456CF1P        | 170mm (6.69")    | 4mm (0.16")                          |

## Non-Ferrous (N) Probes

| # | Description           | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-----------------------|---------------------------|--------------|------------------|--------------------------------------|
| 1 | Straight Probe        | 45mm (1.77")              | T456CN1S     | 85mm (3.35")     | 4mm (0.16")                          |
| 4 | 90° Probe             | 45mm (1.77")              | T456CN1R     | 28mm (1.10")     | 4mm (0.16")                          |
| 5 | Mini 90° Probe        | 45mm (1.77")              | T456CNM5R90A | 16mm (0.63")     | 4mm (0.16")                          |
| 5 | Mini 90° Probe        | 150mm (5.90")             | T456CNM5R90C | 16mm (0.63")     | 4mm (0.16")                          |
| 5 | Mini 90° Probe        | 400mm (15.7")             | T456CNM5R90E | 16mm (0.63")     | 4mm (0.16")                          |
| 6 | PINIP™ Integral Probe |                           | T456CN1P     | 180mm (7.09")    | 4mm (0.16")                          |
| 7 | Anodiser Probe        | 45mm (1.77")              | T456CN1AS    | 100mm (3.94")    | 4mm (0.16")                          |

## Ferrous &amp; Non-Ferrous (FNF) Probes

| # | Description                   | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-------------------------------|---------------------------|--------------|------------------|--------------------------------------|
| 1 | Straight Probe                | 45mm (1.77")              | T456CFNF1S   | 88mm (3.46")     | F: 4mm (0.16")<br>N: 6mm (0.24")     |
| 2 | Scan Probe                    | 45mm (1.77")              | T456CFNF1U   | 89mm (3.50")     | 15mm (0.59")                         |
| 4 | Right Angle Probe             | 45mm (1.77")              | T456CFNF1R   | 38mm (1.50")     | F: 4mm (0.16")<br>N: 6mm (0.24")     |
| 6 | PINIP™ Integral Probe         |                           | T456CFNF1P   | 180mm (7.09")    | F: 4mm (0.16")<br>N: 6mm (0.24")     |
| 8 | Straight Probe armoured cable | 45mm (1.77")              | T456CFNF1ARM | 185mm (7.28")    | F: 4mm (0.16")<br>N: 6mm (0.24")     |


a. Whichever is the greater

b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode

● Certificate supplied as standard.

c. Probe length is measured from X to Y

d. Excluding Scan probe end cap

e. Scan Probe calibrated using a sample of the uncoated substrate  
Elcometer 456 probes are covered by a 1 year warranty

Elcometer 456

Probe Range for Separate Coating Thickness Gauge

Scale 2 Probe Range 0-5mm / 0-200mils




|                          |                           |  |
|--------------------------|---------------------------|--|
| Accuracy <sup>ae</sup> : | ±1-3% or ±20µm            | ±1-3% or ±1.0mil                       |
| Range <sup>d</sup> :     | 0-5mm                     | 0-200mils                              |
| Resolution:              | 1µm: 0-1mm<br>10µm: 1-5mm | 0.1mil: 0-50mils<br>1.0mil: 50-200mils |
| Certificate:             | ●                         |  |

See '#' on the probes table on the opposite page for comparison.



a. Whichever is the greater  
b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode  
Elcometer 456 probes are covered by a 1 year warranty  
● Certificate supplied as standard.

c. Probe length is measured from X to Y  
d. Excluding Scan Probe end cap  
e. Scan Probe accuracy is ±3% or ±0.02mm (0.8mil) with cap fitted, ±1-3% or ±0.02mm (0.8mil) without cap, when calibrated using a sample of the uncoated substrate.



**Elcometer 456****Probe Range for Separate Coating Thickness Gauge****Ferrous (F) Probes**

| # | Description                       | Probe Length <sup>c</sup> | Part Number  | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-----------------------------------|---------------------------|--------------|------------------|--------------------------------------|
| 1 | Straight Probe                    | 45mm (1.77")              | T456CF2S     | 89mm (3.50")     | 8mm (0.32")                          |
| 2 | Straight Probe armoured cable     | 45mm (1.77")              | T456CF2ARM   | 138mm (5.43")    | 8mm (0.32")                          |
| 3 | Scan Probe                        | 45mm (1.77")              | T456CF2U     | 90mm (3.54")     | 15mm (0.59")                         |
| 4 | 90° Probe                         | 45mm (1.77")              | T456CF2R     | 32mm (1.26")     | 8mm (0.32")                          |
| 5 | Telescopic Probe                  | 56-122cm (22-48")         | T456CF2T     | 36mm (1.42")     | 8mm (0.32")                          |
| 6 | Soft Coating Probe                | 45mm (1.77")              | T456CF2B     | 89mm (3.50")     | 8mm (0.32")                          |
| 7 | Waterproof Probe 1m (3') cable    | 45mm (1.77")              | T456CF2SW    | 138mm (5.43")    | 8mm (0.32")                          |
| 7 | Waterproof Probe 5m (15') cable   | 45mm (1.77")              | T456CF2SW-5  | 138mm (5.43")    | 8mm (0.32")                          |
| 7 | Waterproof Probe 15m (45') cable  | 45mm (1.77")              | T456CF2SW-15 | 138mm (5.43")    | 8mm (0.32")                          |
| 7 | Waterproof Probe 30m (98') cable  | 45mm (1.77")              | T456CF2SW-30 | 138mm (5.43")    | 8mm (0.32")                          |
| 7 | Waterproof Probe 50m (164') cable | 45mm (1.77")              | T456CF2SW-50 | 138mm (5.43")    | 8mm (0.32")                          |
| 7 | Waterproof Probe 75m (250') cable | 45mm (1.77")              | T456CF2SW-75 | 138mm (5.43")    | 8mm (0.32")                          |
| 8 | PINIP™ Integral Probe             |                           | T456CF2P     | 174mm (6.85")    | 8mm (0.32")                          |
| 8 | Hi-Temperature PINIP™             |                           | T456CF2PHT   | 174mm (6.85")    | 8mm (0.32")                          |

**Non-Ferrous (N) Probes**

| # | Description           | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-----------------------|---------------------------|-------------|------------------|--------------------------------------|
| 1 | Straight Probe        | 45mm (1.77")              | T456CN2S    | 88mm (3.46")     | 14mm (0.55")                         |
| 8 | PINIP™ Integral Probe |                           | T456CN2P    | 185mm (7.28")    | 14mm (0.55")                         |

a. Whichever is the greater

b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode

Elcometer 456 probes are covered by a 1 year warranty

● Certificate supplied as standard.

c. Probe length is measured from X to Y

d. Excluding Scan Probe end cap

e. Scan Probe accuracy is  $\pm 3\%$  or  $\pm 0.02\text{mm}$  (0.8mil) with cap fitted,  $\pm 1.3\%$  or  $\pm 0.02\text{mm}$  (0.8mil) without cap, when calibrated using a sample of the uncoated substrate.



## Elcometer 456

## Probe Range for Separate Coating Thickness Gauge


## Scale 3 Probe Range

0-13mm / 0-500mils



|                              |                            |  |
|------------------------------|----------------------------|--|
| <b>Accuracy<sup>a</sup>:</b> | ±1-3% or ±50µm             | ±1-3% or ±2.0mils                        |
| <b>Range:</b>                | 0-13mm                     | 0-500mils                                |
| <b>Resolution:</b>           | 1µm: 0-2mm<br>10µm: 2-13mm | 0.1mil: 0-100mils<br>1.0mil: 100-500mils |
| <b>Certificate:</b>          | ●                          |  |

See '#' on the probes table on the opposite page for comparison.

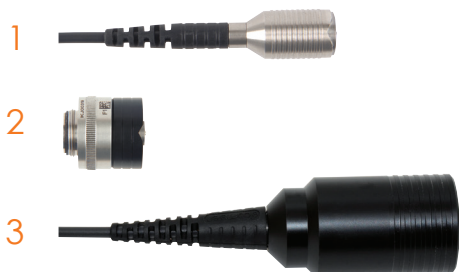

## Ferrous (F) Probes

| # | Description           | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-----------------------|---------------------------|-------------|------------------|--------------------------------------|
| 1 | Straight Probe        | 45mm (1.77")              | T456CF3S    | 102mm (4.02")    | 14mm (0.55")                         |
| 2 | PINIP™ Integral Probe |                           | T456CF3P    | 184mm (7.24")    | 14mm (0.55")                         |

## Non-Ferrous (N) Probes


| # | Description    | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|----------------|---------------------------|-------------|------------------|--------------------------------------|
| 3 | Straight Probe | 45mm (1.77")              | T456CN3S    | 170mm (6.69")    | 35mm (1.38")                         |

a. Whichever is the greater

b. FNF (F): FNF probe in F Mode FNF (N): FNF probe in N Mode

● Certificate supplied as standard.

c. Probe length is measured from X to Y



Elcometer 456 probes are covered by a 1 year warranty

**Elcometer 456****Probe Range for Separate Coating Thickness Gauge****Scale 6 Probe Range****F: 0-25mm / 0-980mils****N: 0-30mm / 0-1,200mils**

|                              |                              |  |
|------------------------------|------------------------------|--|
| <b>Accuracy<sup>a</sup>:</b> | ±1-3% or ±100µm              | ±1-3% or ±4.0mils                        |
| <b>Range<sup>c</sup>:</b>    | F: 0-25mm<br>N: 0-30mm       | F: 0-980mils<br>N: 0-1,200mils           |
| <b>Resolution:</b>           | 10µm: 0-2mm<br>100µm: 2-30mm | 1mil: 0-100mils<br>10mils: 100-1,200mils |
| <b>Certificate:</b>          | ●                            |  |



See '#' on the probes table below for comparison.

**Ferrous (F) Probes**

| # | Description                   | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup>                 |
|---|-------------------------------|---------------------------|-------------|------------------|--|
| 1 | Straight Probe                | 45mm (1.77")              | T456CF6S    | 150mm (5.90")    | 51 x 51mm <sup>2</sup><br>(2 x 2 inch <sup>2</sup> ) |
| 2 | Straight Probe armoured cable | 45mm (1.77")              | T456CF6ARM  | 190mm (7.48")    | 51 x 51mm <sup>2</sup><br>(2 x 2 inch <sup>2</sup> ) |

**Non-Ferrous (N) Probes**

| # | Description                   | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup> |
|---|-------------------------------|---------------------------|-------------|------------------|--------------------------------------|
| 1 | Straight Probe                | 45mm (1.77")              | T456CN6S    | 160mm (6.30")    | 58mm (2.29")                         |
| 2 | Straight Probe armoured cable | 45mm (1.77")              | T456CN6ARM  | 200mm (7.87")    | 58mm (2.29")                         |

**Scale 7 Probe Range****0-31mm / 0-1,220mils**

|                              |                              |   |
|------------------------------|------------------------------|---|
| <b>Accuracy<sup>a</sup>:</b> | ±1-3% or ±100µm              | ±1-3% or ±4.0mils                         |
| <b>Range<sup>d</sup>:</b>    | 0-31mm                       | 0-1220mils                                |
| <b>Resolution:</b>           | 10µm: 0-2mm<br>100µm: 2-31mm | 1.0mil: 0-100mils<br>10mils: 100-1220mils |
| <b>Certificate:</b>          | ●                            |   |

**Ferrous (F) Probes**

| # | Description                   | Probe Length <sup>c</sup> | Part Number | Minimum Headroom | Minimum Sample Diameter <sup>b</sup>                       |
|---|-------------------------------|---------------------------|-------------|------------------|--|
| 2 | Straight Probe armoured cable | 45mm (1.77")              | T456CF7ARM  | 200mm (7.87")    | 55 x 55mm <sup>2</sup><br>(2.17 x 2.17 inch <sup>2</sup> ) |

Elcometer 456

Accessories



**Jumbo Hand Grip**

Ideal for precision placement for the most accurate results on flat and curved surfaces. Place the probe inside the Jumbo Hand Grip and take measurements - ideal when wearing gloves. Suitable for any Elcometer 456 Scale 1 or Scale 2 straight probes.

**F and N Probes**

**Dual FNF Probes**

T9997766-

T99913225

Jumbo Hand Grip



**V-Probe Adaptor**

Ideal for precision placement for the most accurate results on medium and large diameter curved surfaces such as pipes and cylinders. Suitable for any Elcometer 456 Scale 1 or Scale 2 straight probes.

**F and N Probes**

**Dual FNF Probes**

T9997381-

T99913133

V-Probe Adaptor



**Scan Probe Replacement End Caps**

Highly durable - when tested on smooth surfaces, probe end caps have been scanned in excess of 50km (30 miles) - each end cap snaps on to the end of the Scan probe significantly enhancing the lifetime of the probe.

**F & Dual FNF Probes**

**Scale 1**

**Scale 2**

Accuracy:  $\pm 3\%$  or  $\pm 2.5\mu\text{m}$  ( $\pm 1\text{mil}$ )

$\pm 1-3\%$  or  $\pm 0.02\text{mm}$  ( $\pm 1\text{mil}$ )

Measuring Range: 100-1000 $\mu\text{m}$  (3.9-39mils)

0.1-4.5mm (4-180mils)

Part Number

T456C23956

Description

Replacement Scan Probe End Caps (3 per pack)



**Roller Scan Probe Cap**

Clip on adaptor designed for large coated structures, abrasive coatings and pre-construction primers. The Roller Scan Cap can scan in excess of 50km (30 miles) on rough surfaces without damaging the substrate or probe.

**F & Dual FNF Probes**

**Scale 1**

**Scale 2**

Accuracy:  $\pm 6\%$

$\pm 5\%$

Measuring Range: 100-1000 $\mu\text{m}$  (3.9-39mils)

0.5-4.5mm (20-180mils)

Part Number

T456C29050

Description

Elcometer 456 Roller Scan Probe Cap<sup>1</sup>



For a full range of calibration standards and foil sets see page 7-46

<sup>1</sup> UK Patent Number: 2571577



**Elcometer****What is the correct probe for each Coating/Substrate?**

The table below shows common coating/substrate combinations. If you do not see your coating/substrate combination, please contact Elcometer to discuss your particular requirement.

Elcometer offers a free Test Sample Report. Contact us to arrange for our Technical Department to establish the most appropriate gauge for your process or application.

| COATING               | SUBSTRATE |       |        |        |       |           |                 |          |         |      |
|-----------------------|-----------|-------|--------|--------|-------|-----------|-----------------|----------|---------|------|
|                       | Aluminium | Brass | Bronze | Copper | Steel | Magnesium | Stainless Steel | Titanium | Uranium | Zinc |
| Aluminium             | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Anodising             | NF        | -     | -      | -      | -     | NF        | -               | -        | -       | -    |
| Brass                 | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Bronze                | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Cadmium               | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Ceramic               | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Chrome (Hard)         | NF*       | -     | -      | NF*    | F     | -         | -               | -        | -       | -    |
| Copper                | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Eloxal                | NF        | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Epoxy                 | NF        | NF    | NF     | NF     | F     | -         | NF              | NF       | -       | NF   |
| Galvanising           | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Lacquer               | NF        | NF    | NF     | NF     | F     | -         | NF              | -        | -       | NF   |
| Metal Spray           | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Molybdenum Disulphide | -         | -     | -      | -      | F     | -         | NF              | -        | -       | -    |
| Nickel (Electroless)  | NF*       | NF*   | -      | NF*    | F     | -         | -               | -        | -       | -    |
| Paint                 | NF        | NF    | NF     | NF     | F     | NF        | NF              | NF       | NF      | NF   |
| Plastic               | NF        | NF    | NF     | NF     | F     | NF        | NF              | NF       | NF      | NF   |
| Plating               | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Rubber                | NF        | -     | -      | -      | F     | -         | -               | -        | NF      | -    |
| Resist                | -         | -     | -      | NF     | -     | -         | -               | -        | -       | -    |
| Tin                   | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |
| Varnish               | NF        | NF    | NF     | NF     | F     | -         | -               | -        | -       | -    |
| Zinc                  | -         | -     | -      | -      | F     | -         | -               | -        | -       | -    |

NF : use Non-Ferrous probe

F : use Ferrous probe

\* : known sample required for calibration

### Elcometer 456

### Integral Coating Thickness Gauge

The **Elcometer 456** Coating Thickness Gauge is available with an **integral probe**; ideal for single handed operation for consistent, repeatable and accurate results.

Ergonomic design,  
ideal for continuous  
use

Reading rate of  
70+ per minute

Easy to read, user  
definable display with  
automatic screen  
brightness

Measure coatings up  
to 13mm (500mils)  
on metal substrates

Scratch and solvent  
resistant screen



Stores up to  
150,000 readings in  
alphanumeric batches

Bigfoot™  
integral probe





**Elcometer 456****Integral Coating Thickness Gauge**

Large easy to read measurements in Metric and Imperial units



Bigfoot™ integral probe for accurate measurements



Easy to use and minimum set up required



USB and Bluetooth® data output to iPhone<sup>2</sup> or Android™ devices

**Easy**

Calibrated and ready for immediate use

Easy to use menus, large buttons and colour LCD screen with auto rotate; factory calibrated and ready to use, straight from the box.

**Accurate**

Accurate measurements on smooth, rough, thin and curved surfaces

With a thickness measurement capability to  $\pm 1\%$  and increased reading resolution, the Elcometer 456 produces accurate, temperature stable measurements every time.

**Reliable**

Peace of mind

Repeatable and reproducible and available with a 2 year<sup>1</sup> manufacturer's warranty; giving you peace of mind.

**Rugged**

Durable and suitable for use in harsh environments

Suitable for use in harsh environments, the Elcometer 456 is sealed, heavy duty and impact resistant with dust and waterproof equivalent to IP64.

**Powerful**

Store up to 150,000 readings in 2,500 batches

Measures up to 13mm (500mils) of coating on metal substrates with USB and Bluetooth® data output making it compatible with ElcoMaster® software.

**STANDARDS:**

AS 2331.1.4, AS 3894.3-B, AS/NZS 1580.108.1, ASTM B244, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 7091, ASTM E 376, ASTM G 12, BS 3900-C5-6B, BS 3900-C5-6A, BS 5411-11, BS 5411-3, BS 5599, DIN 50981, DIN 50984, ECCA T1, EN 13523-1, IMO MSC.215(82), IMO MSC.244 (83), ISO 1461, ISO 19840, ISO 2063, ISO 2178, ISO 2360, ISO 2808-6A, ISO 2808-6B, ISO 2808-7C, ISO 2808-7D, ISO 2808-12, JIS K 5600-1-7, NF T30-124, SS 184159, SSPC PA 2, US Navy PPI 63101-000, US Navy NSI 009-32

<sup>1</sup> The Elcometer 456 is supplied with a 1 year warranty against manufacturing defects.  
The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>2</sup> Compatible with iPod, iPhone and iPad.



## Elcometer 456

## Integral Coating Thickness Gauge

### Product Features

■ Standard

□ Optional

|   | Model B             | Model S              | Model T              |
|---|---------------------|----------------------|----------------------|
| Fast, accurate reading rate; <i>70+ readings per minute</i>                           | ■                   | ■                    | ■                    |
| Repeatable & reproducible measurements  | ■                   | ■                    | ■                    |
| Easy to use menu structure; <i>in 30+ languages</i>                                   | ■                   | ■                    | ■                    |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>                 | ■                   | ■                    | ■                    |
| Bright colour screen; <i>with permanent backlight</i>                                 | ■                   | ■                    | ■                    |
| Scratch & solvent resistant display; <i>2.4" (6cm) TFT</i>                            | ■                   | ■                    | ■                    |
| Large positive feedback buttons   | ■                   | ■                    | ■                    |
| USB power supply; <i>via PC</i>   | ■                   | ■                    | ■                    |
| Test certificate  | ■                   | ■                    | ■                    |
| 2 year gauge warranty <sup>1</sup>  | ■                   | ■                    | ■                    |
| Automatic rotating display; <i>0°, 90°, 180° &amp; 270°</i>                           | ■                   | ■                    | ■                    |
| Ambient light sensor; <i>with adjustable auto brightness</i>                          | ■                   | ■                    | ■                    |
| Emergency light   | ■                   | ■                    | ■                    |
| Tap awake from sleep  | ■                   | ■                    | ■                    |
| Gauge software updates <sup>2</sup> ; <i>via ElcoMaster® software</i>                 | ■                   | ■                    | ■                    |
| Data output   | ■                   | ■                    | ■                    |
| USB; <i>to computer</i>   | ■                   | ■                    | ■                    |
| Bluetooth®; <i>to computer, Android™ &amp; iOS<sup>3</sup> devices</i>                |                     | ■                    | ■                    |
| On screen statistics  | ■                   | ■                    | ■                    |
| Number of readings; $\eta$ , Mean (average); $\bar{x}$ , Standard deviation; $\sigma$ | ■                   | ■                    | ■                    |
| Highest reading; <i>Hi</i> , Lowest reading; <i>Lo</i> , Coefficient of variation;    |                     |                      |                      |
| CV%, Elcometer index value <sup>4</sup> ; <i>EIV</i>                                  |                     |                      |                      |
| Nominal dry film thickness; <i>NDFT</i>   |                     | ■                    | ■                    |
| IMO PSPC; <i>%&gt;NDFT, %&gt;90&lt;NDFT, 90:10 pass/fail</i>                          |                     | ■                    | ■                    |
| High & low limits; <i>definable audible &amp; visual alarms</i>                       |                     | ■                    | ■                    |
| Number of readings above high limit;  |                     | ■                    | ■                    |
| Number of readings below low limit;   |                     | ■                    | ■                    |
| Live reading trend graph; <i>in Batch Mode</i>  |                     | ■                    | ■                    |
| ElcoMaster® software & USB cable  | □                   | ■                    | ■                    |
| Replaceable screen protectors   | □                   | ■                    | ■                    |
| Protective case   | ■                   | ■                    | ■                    |
| Plastic transit case  | □                   | □                    | ■                    |
| Integral models; <i>with automatic gauge switch on</i>                                | ■                   | ■                    | ■                    |
| Probe type; <i>Ferrous (F), Non-Ferrous (N), Dual (FNF)</i>                           | F, N, FNF           | F, N, FNF            | F, N, FNF            |
| Measurement range   | 0-13mm<br>0-500mils | 0-1500µm<br>0-60mils | 0-1500µm<br>0-60mils |
| On screen calibration instructions; <i>in 30+ languages</i>                           |                     |                      |                      |
| Multiple calibration methods  | ■                   | ■                    | ■                    |
| Factory; <i>resets to the factory calibration</i>                                     | ■                   | ■                    | ■                    |
| 2-point; <i>for smooth and rough surfaces</i>   | ■                   | ■                    | ■                    |
| 1-point; <i>zero calibration</i>  | ■                   | ■                    | ■                    |
| Zero offset; <i>for calibration according to ISO19840</i>                             |                     | ■                    | ■                    |
| Predefined calibration & measurement methods  |                     | ■                    | ■                    |
| ISO, SSPC PA2, Swedish, Australian  |                     | ■                    | ■                    |

<sup>1</sup> The Elcometer 456 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). Elcometer 456 probes are covered by a 1 year warranty.

<sup>2</sup> Internet connection required

<sup>3</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.

<sup>4</sup> Elcometer Index Values are used in the automotive industry to assess a coating's overall quality; USA Patent Number US7606671B2

## Elcometer 456

## Integral Coating Thickness Gauge

## Product Features

■ Standard

□ Optional

|   | Model B | Model S | Model T |
|---|---------|---------|---------|
| Automatic calibration; <i>for rapid calibration</i>                       |         | ■       | ■       |
| Calibration memory type; <i>gauge (g) or gauge &amp; batch (gb)</i>       | g       | gb      | gb      |
| Number of batches; <i>with unique calibrations</i>                        |         | 1       | 2,500   |
| Calibration memories; <i>3 user-programmable memories</i>                 |         |         | ■       |
| Measurement outside calibration warning                                   |         |         | ■       |
| Calibration lock; <i>with optional PIN code unlock</i>                    | ■       | ■       | ■       |
| Delete last reading   | ■       | ■       | ■       |
| Gauge memory; <i>number of readings</i>                                   | Last 5  | 1,500   | 150,000 |
| Individual batch calibrations; <i>sent to PC via ElcoMaster® software</i> |         | ■       | ■       |
| Limits; <i>user definable audible &amp; visual pass/fail warnings</i>     |         | ■       | ■       |
| Gauge (g) or gauge & batch specific (gb) limits                           |         | g       | gb      |
| Date and time stamp   |         | ■       | ■       |
| Review, clear & delete batches  |         | ■       | ■       |
| Batch types; <i>normal, counted average, IMO PSPC</i>                     |         | ■       | ■       |
| Navsea Mode   |         |         | ■       |
| Batch review graph  |         |         | ■       |
| Copy batches and calibration settings                                     |         |         | ■       |
| Alpha-numeric batch names; <i>user definable on the gauge</i>             |         |         | ■       |
| Scan & Auto Repeat Modes; <i>with Scan probe connected</i>                |         |         | ■       |
| Fixed Batch Size Mode; <i>with batch linking</i>                          |         |         | ■       |

## Technical Specification

|  |   |  |   |             |
|--|---|--|---|-------------|
| Scale 1  | Range: 0-1,500µm (0-60mils)   |  | Accuracy <sup>7</sup> : ±1-3% or ±2.5µm (±0.1mil) |             |
|  | Resolution: 0.1µm: 0-100µm; 1µm: 100-1,500µm (0.01mil: 0-5mils; 0.1mil: 5-60mils)   |  |   |             |
| Model  | Model B   | Model S                                  | Model T   | Certificate |
| Elcometer 456 Ferrous Integral   | A456CFBI1   | A456CFSI1                                | A456CFTI1   | ●           |
| Elcometer 456 Non-Ferrous Integral   | A456CNBI1   | See separate gauges with N1 PINIP™ Probe | See separate gauges with N1 PINIP™ Probe          | ●           |
| Elcometer 456 Dual FNF Integral  | A456CFNFI1  | A456CFNFSI1                              | A456CFNFTI1                                       | ●           |
| Scale 2  | Range: 0-5mm (0-200mils)  |  | Accuracy <sup>7</sup> : ±1-3% or ±20µm (±1.0mil)  |             |
|  | Resolution: 1µm: 0-1mm; 10µm: 1-5mm (0.1mil: 0-50mils; 1mil: 50-200mils)  |  |   |             |
| Model  | Model B   | Model S                                  | Model T   | Certificate |
| Elcometer 456 Ferrous Integral   | A456CFBI2   | See separate gauges with F2 PINIP™ Probe | See separate gauges with F2 PINIP™ Probe          | ●           |
| For higher resolution & accuracy on thin coatings Scale 2 gauges can be switched to the Scale 1 mode measurement performance |   |  |   |             |
| Scale 3  | Range: 0-13mm (0-500mils)   |  | Accuracy <sup>7</sup> : ±1-3% or ±50µm (±2.0mils) |             |
|  | Resolution: 1µm: 0-2mm; 10µm: 2-13mm (0.1mil: 0-100mils; 1mil: 100-500mils)   |  |   |             |
| Model  | Model B   | Model S                                  | Model T   | Certificate |
| Elcometer 456 Ferrous Integral   | A456CFBI3   | See separate gauges with F3 PINIP™ Probe | See separate gauges with F3 PINIP™ Probe          | ●           |
| Display Information  | 2.4" (6cm) QVGA colour TFT display, 320 x 240 pixels  |  |   |             |
| Battery Type   | 2 x AA batteries, rechargeable batteries can also be used   |  |   |             |
| Battery Life   | approximately 24 hours of continuous use at 1 reading per second <sup>8</sup>   |  |   |             |
| Gauge Dimensions (h x w x d)   | 141 x 73 x 37mm (5.55 x 2.87 x 1.46")   |  |   |             |
| Gauge Weight (including batteries supplied)  | 156g (5.50oz)   |  |   |             |
| Operating Temperature  | -10 to 50°C (14 to 122°F)   |  |   |             |
| Packing List   | Elcometer 456 gauge, calibration foils, wrist harness, transit case (T), protective case (B, S, T), 1 x screen protectors (S, T), 2 x AA batteries, operating instructions, USB cable (S, T), ElcoMaster® software (S, T) |  |   |             |

<sup>7</sup> Whichever is the greater<sup>8</sup> Using default settings & lithium batteries, alkaline or rechargeable batteries may differ

● Certificate supplied as standard.

### Elcometer 456 IPC

### Industrial Protective Coating Thickness Gauge

The **Elcometer 456 IPC** Industrial Protective Coating Thickness Gauge is pre-calibrated to measure DFT on shot or grit blasted steel substrates.

Easy to use multi-lingual menu structure

Stores up to 150,000 readings in alphanumeric batches

Pre-calibrated with 4 profile ranges:

| Profile | Metric   | Imperial |
|---------|----------|----------|
| Smooth  | 0-25µm   | 0-1mil   |
| Fine    | 25-60µm  | 1-2mils  |
| Medium  | 60-100µm | 2-3mils  |
| Coarse  | >100µm   | 3-4mils  |



Built in integral probe for stable, repeatable readings on flat or curved surfaces

Measure dry film thickness on shot or grit blasted steel substrates





**Elcometer 456 IPC****Industrial Protective Coating Thickness Gauge****Ready to Use**

Transfer readings via Bluetooth® or USB to ElcoMaster®

Calibrated and ready for immediate use

Pre-calibrated with 4 profile ranges, simply remove the Elcometer 456 IPC<sup>1</sup> Gauge out of the box and begin measuring.

**Reliable**

Designed to last

Robust, durable, weather resistant and available with a 2 year<sup>2</sup> manufacturer's warranty; giving you peace of mind.



Ready to use straight from the box, no need for calibration

**Wireless Connectivity**

Seamlessly connect to any PC, Android™ or iOS mobile device

Instantly transmit your thickness values via USB or Bluetooth® to your PC or mobile device using ElcoMaster® or your own software application.



Displays 3 individual readings together with their average

**Efficient**

Stable, repeatable readings on flat or curved surfaces

With a built in integral probe, the Elcometer 456 IPC is designed to display three individual readings together with their average in microns or mils.

**STANDARDS:**

ASTM D7091, ISO 2808, ISO 19840, SSPC PA-2, US Navy NSI 009-32

<sup>1</sup> USA patent number US6243 661, European patent number: 2754993

<sup>2</sup> The Elcometer 456 IPC is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

## Elcometer 456 IPC

## Industrial Protective Coating Thickness Gauge

### Product Features

| Model  | Model S      | Model T       |
|--|--------------|---------------|
| Part Number  | A456CFI1-IPC | A456CFT11-IPC |
| Test Certificate   | ●            | ●             |
| Fast, accurate reading rate; 70+ readings per minute   | ■            | ■             |
| Data output  | ■            | ■             |
| USB; to computer   | ■            | ■             |
| Bluetooth®; to computer, Android™ & iOS¹ devices   | ■            | ■             |
| On screen statistics; in Batch Mode  |              | ■             |
| Number of readings; $\eta$ , Mean (average); $\bar{x}$ , Standard deviation; $\sigma$ , Highest reading; Hi, Lowest reading; Lo, Coefficient of variation; CV%, Elcometer index value²; EIV, Nominal dry film thickness; NDFT, High & low limits; definable audible & visual alarms, Number of readings above high limit; Number of readings below low limit |              | ■             |
| ElcoMaster® software & USB cable   |              | ■             |
| Integral Probe type; Ferrous (F)   | ■            | ■             |
| Measurement range; 0 - 1,500µm (0 - 60mils)  | ■            | ■             |
| Resolution; 10µm/1mil (where 5µm/0.5mil is rounded up)   | ■            | ■             |
| Accuracy³; ±5%   | ■            | ■             |
| Minimum substrate thickness; 300µm (12mils)  | ■            | ■             |
| Pre-calibrated with 4 profile ranges;  | ■            | ■             |
| Smooth 0-25µm 0-1mil, Fine 25-60µm 1-2mils, Medium 60-100µm 2-3mils, Coarse >100µm 3-4mils   | ■            | ■             |
| Auto calibration   | ■            | ■             |
| Calibration memory type; gauge (g) or gauge & batch (gb)   | g            | gb            |
| Number of batches; with unique calibrations  |              | 2,500         |
| Calibration lock; with optional PIN code unlock  | ■            | ■             |
| Delete last reading  | ■            | ■             |
| Gauge memory; number of readings   |              | 150,000       |
| Individual batch calibrations; sent to PC via ElcoMaster® software   |              | ■             |
| Limits; user definable audible & visual pass/fail warnings   |              | ■             |
| Gauge & batch specific limits  |              | ■             |
| Date and time stamp  |              | ■             |
| Review, clear & delete batches   |              | ■             |
| Batch types; normal, counted average   |              | ■             |
| Batch review graph   |              | ■             |
| Copy batches and calibration settings  |              | ■             |
| Alpha-numeric batch names; user definable on the gauge   |              | ■             |

### Technical Specification

|                              |   |
|------------------------------|---|
| Battery Type                 | 2 x AA batteries, rechargeable batteries can also be used   |
| Battery Life⁴                | Alkaline: Approx. 16 hours Lithium: Approx. 24 hours  |
| Gauge Dimensions (h x w x d) | 141 x 73 x 37mm (5.55 x 2.87 x 1.46")   |
| Weight (including batteries) | 156g (5.5oz)  |
| Operating Temperature        | -10 to 50°C (14 to 122°F)   |
| Packing List                 | Elcometer 456 IPC Gauge, calibration foils, wrist harness, protective case, 1 x screen protector, USB cable, test certificate, 2 x AA batteries & user guide. |

¹ Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.

● Test certificate supplied as standard.

² Elcometer Index Values are used in the automotive industry to assess a coating's overall quality; USA patent number US7606671B2    ³ When in test calibration mode

⁴ Using default settings & lithium batteries, alkaline or rechargeable batteries may differ



**Elcometer 500**

**Coating Thickness Gauge - Cementitious Substrates**

The **Elcometer 500** Coating Thickness Gauge accurately measures the thickness of coatings on concrete and other similar substrates<sup>1</sup> - non destructively.

**STANDARDS:**

ASTM D6132, SSPC-PA 9,  
ISO 2808 Method 10

Easy to read, user definable display with automatic screen brightness

Store up to 100,000 readings in up to 1,000 alpha-numeric batches


Ergonomic design, ideal for continuous use

Measure more than 60 readings per minute in Standard Mode and over 140 readings per minute in Scan Mode

Accurately measure up to 9mm (355mils) of coatings on concrete or other similar substrates<sup>2</sup>

Rugged, intelligent probes with field replaceable tips;

- C1 150 - 2,500µm (6 - 98mils)
- C2 750 - 9,000µm (30 - 355mils)

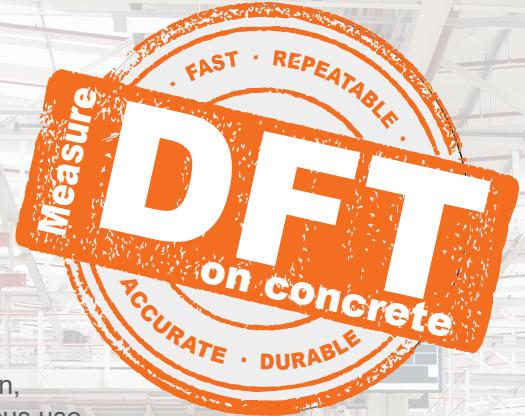

C1

C2



<sup>1</sup> Similar substrates include plasterboard, drywall, concrete block, brick, etc.

<sup>2</sup> Epoxy coatings, thickness on other materials may vary




### Elcometer 500

### Coating Thickness Gauge - Cementitious Substrates

#### Fast

Significantly reduce your inspection times


Measure over 60 readings per minute in Standard Mode and over 140 readings per minute in Scan Mode.

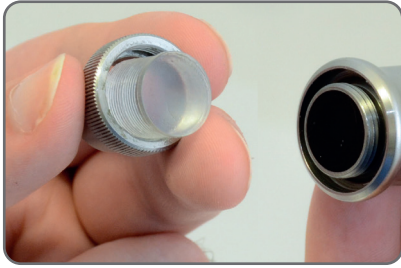

Ergonomic probes with replaceable probe tips



Easy to use and minimum set up required

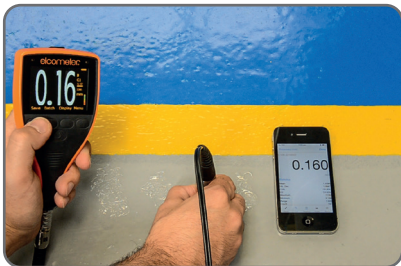

USB and Bluetooth® data output to iPhone<sup>4</sup> or Android™ devices



No force is required to take a reading

#### Rugged

Designed to last

Designed to work in harsh environments, with a 2 year gauge warranty<sup>3</sup>, the Elcometer 500 is robust, ergonomic and sealed against dirt and water, equivalent to a rating of IP54.

#### Intelligent

Maximise inspection time

Supplied with user replaceable probe tips, the gauge informs the user when the probe tip requires changing, maximising inspection time.

#### Easy to Use

Calibrated and ready for immediate use

Select the coating material from the gauge library and start measuring, there is no need to set up gates, range values or know the thickness of the coating.

#### Wireless Connectivity

Seamlessly connect to any PC, Android™ or iOS mobile device

Instantly transmit your thickness values via USB or Bluetooth® to your PC or mobile device using ElcoMaster® software.

<sup>3</sup> The Elcometer 500 is supplied with a 1 year warranty against manufacturing defects.

The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

<sup>4</sup> Compatible with iPod, iPhone and iPad.

**Elcometer 500****Coating Thickness Gauge - Cementitious Substrates**

## 3 different modes of calibration

The Elcometer 500's user calibration adjustment procedures are fully traceable to National and International Standards.

### 1. Coating Material Library



The Elcometer 500's advanced measurement technology means that you no longer need to know how thick the coating should be or to set up measurement gates before taking a reading.

- Simply switch on the gauge
- Select the coating from the calibration library
- Take a reading - it is that easy.

### 2. Material Thickness Calibration



To obtain the greatest measurement accuracy, the Elcometer 500 can be calibrated using the known thickness of the coating to be measured.

If a sample of known thickness is not available, the Elcometer 500 Coating Calibration Mould (CCM) can be used to create a coating of known thickness which is traceable to both National and International Standards.

### 3. Sound Velocity Calibration



The Elcometer 500 can be calibrated by entering the speed of sound from the Product Datasheet available from the coating manufacturer.

## Elcometer 500

## Coating Thickness Gauge - Cementitious Substrates

### Creating a coating sample

How to create a coating sample using the Elcometer 500 (CCM).


#### Step 1

Place the Coating Calibration Mould (CCM) on a flat surface and completely fill the sample chamber with the test coating.



#### Step 2

Using the plastic scraper, scrape over the coating allowing the excess to fall into the overflow chamber. Allow the coating to cure.

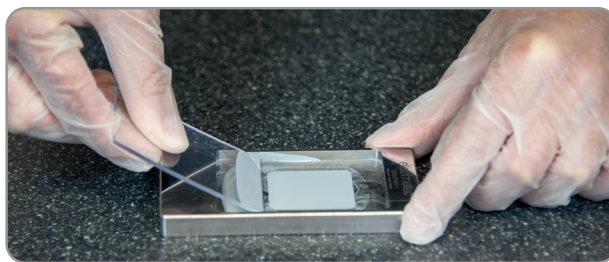

#### Step 3

When fully cured, calibrate a ferrous coating thickness gauge on the side of the CCM then measure and record the dry film thickness at the centre of the coating.



#### Step 4

Measure the same point using the Elcometer 500. Enter the dry film thickness measurement and save it in the Elcometer 500's Coating Materials list.



#### Display Modes



Individual Readings



Readings & Statistics



Readings & Run Charts



Readings & Bar Graphs



Readings & Differential



## Elcometer 500

## Coating Thickness Gauge - Cementitious Substrates

| Product Features  | ■ Standard | □ Optional                   |
|---|------------|------------------------------|
|   | Model B    | Model T                      |
| Fast, accurate reading rate; 60+ readings per minute  | ■          | ■                            |
| Repeatable & reproducible measurements  | ■          | ■                            |
| Easy to use menu structure; in 30+ languages  | ■          | ■                            |
| Tough, impact, waterproof & dust resistant; equivalent to IP54  | ■          | ■                            |
| Bright colour screen; with automatic rotating display (0°, 90°, 180° & 270°)  | ■          | ■                            |
| Scratch & solvent resistant display; 2.4" (6cm) TFT   | ■          | ■                            |
| USB power supply; via PC  | ■          | ■                            |
| Test certificate & 2 year gauge warranty <sup>1</sup>   | ■          | ■                            |
| Ambient light sensor; with adjustable auto brightness   | ■          | ■                            |
| Automatic probe recognition   | ■          | ■                            |
| Gauge software updates <sup>2</sup> ; via ElcoMaster <sup>®</sup> software  | ■          | ■                            |
| Data output   | ■          | ■                            |
| USB; to computer  | ■          | ■                            |
| Bluetooth <sup>®</sup> ; to computer, Android <sup>™</sup> & iOS <sup>3</sup> devices   |            | ■                            |
| Measurement units; $\mu\text{m}$ , mm, mils, inch   | ■          | ■                            |
| Signal strength indicator   | ■          | ■                            |
| User selectable reading resolution; Low & High reading resolution   | ■          | ■                            |
| Display modes; user selectable  |            | ■                            |
| Readings  | ■          | ■                            |
| Readings & differential; reading and the offset from a set nominal difference   |            | ■                            |
| Bar graph   |            | ■                            |
| Live reading trend graph; in Batch Mode   |            | ■                            |
| Run chart; trend graph of last 20 readings  |            | ■                            |
| User selectable statistics;   | ■          | ■                            |
| Number of readings; $\eta$ , Mean (average); $\bar{x}$ , Standard deviation; $\sigma$ , Highest reading; Hi, Lowest reading; Lo, Coefficient of variation; CV%            | ■          | ■                            |
| Nominal dry film thickness; NDFT, High & low limits; definable audible & visual alarms, Number of readings above high limit; Number of readings below low limit; Range; I |            | ■                            |
| Multiple calibration methods with on screen instructions; in 30+ languages  | ■          | ■                            |
| Material selection; preset choice of materials or create own user defined materials   | ■          | ■                            |
| Velocity entry; direct entry of a material's sound-velocity   | ■          | ■                            |
| 1 Point; using a coating sample of known thickness  | ■          | ■                            |
| Calibration lock; with optional PIN code unlock   | ■          | ■                            |
| Gauge memory; number of readings  |            | 100,000                      |
| Number of batches; with unique batch calibrations   |            | 1,000                        |
| Alpha-numeric batch names; user definable on the gauge  |            | ■                            |
| Fixed Batch Size Mode; with batch linking   |            | ■                            |
| Batch review graph  |            | ■                            |
| Delete last reading   | ■          | ■                            |
| Limits; 40 user definable audible & visual pass/fail warnings   |            | ■                            |
| Live Reading Mode; transfer of individual readings to external device   | USB        | USB & Bluetooth <sup>®</sup> |
| Reading save function   | ■          | ■                            |
| Date and time stamp   |            | ■                            |
| Scan Mode   |            | ■                            |
| ElcoMaster <sup>®</sup> software & USB cable  | □          | ■                            |
| Protective case   | ■          | ■                            |
| Plastic transit case  | □          | ■                            |

<sup>1</sup> The Elcometer 500 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). <sup>2</sup> Internet connection required <sup>3</sup> Visit [www.elcometer.com/sdk](http://www.elcometer.com/sdk) to find out how to integrate Elcometer's MFi certified products to your App.



## Elcometer 500

## Coating Thickness Gauge - Cementitious Substrates

### Technical Specification

| Part Number           | Description  | Certificate |
|-----------------------|--|-------------|
| A500C-B               | Elcometer 500 Coating Thickness Gauge Model B  | ●           |
| A500C-T               | Elcometer 500 Coating Thickness Gauge Model T  | ●           |
| A500-KIT1             | Elcometer 500 Coatings on Concrete Inspection Kit  | ●           |
| Operating Temperature | -10 to 50°C (14 to 122°F)  |             |
| Power Supply          | 2 x AA batteries (rechargeable batteries can be used)  |             |
| Battery Life          | Alkaline: Approximately 15 hours Lithium: Approximately 28 hours   |             |
| Gauge Weight          | 161g (5.68oz) including batteries, without transducer  |             |
| Gauge Dimensions      | 141 x 73 x 37mm (5.55 x 2.87 x 1.46") without transducer   |             |
| Packing List          | <b>Elcometer 500 Coating Thickness Gauge Model B / Model T</b><br>Elcometer 500 Coating Thickness Gauge, 4ml (0.14fl oz) bottle of probe tip oil, 120ml (4fl oz) bottle of ultrasonic couplant, 2 x AA batteries, protective case, transit case (Model T), wrist harness, 3 x screen protectors, ElcoMaster® software (Model T), USB cable (Model T), test certificate<br><b>Elcometer 500 Coatings on Concrete Inspection Kit</b><br>Elcometer 500 Model T Coating Thickness Gauge, C1 & C2 coating thickness probes, C1 & C2 probe measurement foils: 1, 2, 3 & 8mm (40, 80, 120 & 310mils), Elcometer 456 Model B Ferrous Integral Gauge, Elcometer 456 calibration foils: 0.5 & 1.5mm (20 & 60mils), 2 x coating calibration moulds, 120ml (4fl oz) bottle of ultrasonic couplant, 4ml (0.14fl oz) bottle of probe tip oil, transit case, ElcoMaster® software & USB cable, test certificate |             |

### Probe Range

| Scale C1   | T500-C1   | Elcometer 500 Scale C1 Probe                          | Certificate |
|--|---|---|-------------|
|  | Range <sup>1</sup> : 150 - 2,500µm (6 - 98mils)                                     | Accuracy <sup>2</sup> : ±2% or ±10µm (±2% or ±0.4mil) | ●           |
|  | Resolution: Low: 10µm, 0.01mm, 1mil or 0.001" High: 1µm, 0.001mm, 0.1mil or 0.0001" |   |             |
| Scale C2   | T500-C2   | Elcometer 500 Scale C2 Probe                          | Certificate |
|  | Range <sup>1</sup> : 750 - 9,000µm (30 - 355mils)                                   | Accuracy <sup>2</sup> : ±2% or ±10µm (±2% or ±0.4mil) | ●           |
|  | Resolution: Low: 10µm, 0.01mm, 1mil or 0.001" High: 1µm, 0.001mm, 0.1mil or 0.0001" |   |             |

### Accessories

| Part Number   | Description  |
|---------------|--|
| T50027602-1   | C1 Replacement Probe Tip; Pack of 2  |
| T50027602-2   | C2 Replacement Probe Tip; Pack of 2  |
| T50027604     | Probe Tip Oil; 4ml (0.14fl oz) Bottle  |
| T92015701     | Ultrasonic Couplant; 120ml (4fl oz)  |
| T92024034-7   | Ultrasonic Couplant; 300ml (10fl oz)   |
| T92024034-8   | Ultrasonic Couplant; 500ml (17fl oz)   |
| T92024034-3   | Ultrasonic Couplant; 3.8l (1 US Gallon)  |
| T92024034-9   | Ultrasonic Couplant (High Temp); 60ml (2fl oz);<br><i>for use in high temperature environments up to 398°C (750°F)</i> |
| T99022255-13  | C1 Foil Set: 1 & 2mm (40 & 80mils)   |
| T99022255-13C | C1 Foil Set - Certified: 1 & 2mm (40 & 80mils)   |
| T99022255-14  | C2 Foil Set: 3 & 8mm (120 & 310mils)   |
| T99022255-14C | C2 Foil Set - Certified: 3 & 8mm (120 & 310mils)   |
| T50027567-1   | Elcometer 500 Coating Calibration Mould (CCM)  |

● Test Certificate supplied as standard

<sup>1</sup> Epoxy coatings, thickness on other materials may vary

<sup>2</sup> Whichever is greater



# For all your NDT Inspection Equipment visit [ndt.elcometer.com](http://ndt.elcometer.com)

**elcometer** Material Thickness & Corrosion

**Elcometer MTG Ultrasonic Material Thickness Gauge**

The Elcometer MTG range has all the features and functionality necessary for measuring material thickness and velocity on virtually any material - for a wide range of applications.

- Auto recognition, ensures correct probe is identified when transducer is changed
- Scan Mode at 16Hz, ideal for measuring a large surface area
- User selectable reading resolution: 0.1mm (0.01") or 0.2mm (0.007")
- Echo Echo (EE), Echo Echo Through™ & Velocity (VM) measurement modes
- Hi & Lo limit indicators provides indication of problem areas

Some MTG gauges are supplied as a gauge only, without transducer. Transducers must be ordered separately. (Wide range of transducers available - see page 16)

Integrated zero disc, ensures maximum accuracy

Stores up to 100,000 readings in up to 1,000 sequential batches

Selectable reading rate of 4, 8, 16Hz (4, 8, 16 readings per second)

**STANDARDS:**  
ASTM E 797, EN 14127, EN 15137



**Material Thickness & Corrosion** [elcometer.com](http://elcometer.com)

**Elcometer MTG Ultrasonic Material Thickness Gauge**

**Accurate**  
A range of calibration options for accuracy and efficiency  
The MTG gauges have a range of calibration options including the 1-point calibration method. Users can also select one of 30 pre-set materials stored within the gauge or store up to three calibrations into the memory.

**Variable**  
Measures uncoated & coated surfaces  
Flexible & easy to use, the Elcometer MTG range doesn't just measure uncoated surfaces but can also measure coated surfaces. Using Echo Echo Through™ Mode (EE), coatings up to 20mm (0.8in) are ignored.

**Customisable**  
Choose & customise the reading display  
The Elcometer MTG range has a choice of display modes allowing the user to select the most appropriate for their needs. Readings, Selected Statistics, Bar Graph, Run Chart, B-Scan & Differential Mode.

**Intelligent**  
User definable limits for pass/fail indication  
Users are able to set upper and lower limits with audible and visual pass/fail warnings. Limits can be set for individual readings or for each batch.

**Wireless Connectivity**  
Seamlessly connect to any PC, Android™ or iOS mobile device  
Compatible with both ElcoMaster® and ElcoMaster® Mobile App, readings can be downloaded via USB or Bluetooth® to PC, iOS or Android™ devices for further analysis and reporting.

Connect the gauge via Bluetooth® or USB to a mobile device






NDT Inspection Equipment 1-5







# Dry Film Thickness

Digital Gauges

7-6

Mechanical Gauges

7-42

Foils & Standards

7-46

Destructive Gauges

7-52



**Elcometer 211**

**Mechanical Coating Thickness Gauge**

The **Elcometer 211** Coating Thickness Gauge, commonly referred to as the "Banana Gauge", is a Type I instrument designed to measure dry film thickness.

Foils supplied to check calibration on site

Small and portable with  $\pm 5\%$  accuracy

Ideal for cold surfaces or where use of electronic instruments is prohibited

Factory calibrated - with user calibration adjustment

Available in either Metric or Imperial versions

Measures coatings up to 6mm (250mils)

"V" grooved base ideal for pipeline inspection

**STANDARDS:**

AS 2331.1.3, AS 3894.3-A, ASTM G 12, ASTM B 499, AS/NZS 1580.108.1, BS 5411-11, BS 3900-C5-6A, DIN 50981, ISO 2178, ISO 2808-6A, ISO 2808-7A, JIS K 5600-1-7, NF T 30-124, SSPC-PA2



Elcometer 211

Mechanical Coating Thickness Gauge



Ready to Use

Calibrated and ready for immediate use

The Elcometer 211 is factory calibrated with user calibration adjustment and also comes with foils to check calibration on site.



Accurate

Small and portable with  $\pm 5\%$  accuracy

Available in either Metric or Imperial versions, the Elcometer 211 measures coatings up to 6mm (250mils).



Versatile

Ideal for use in a range of environments

Ideal for environments where the use of electronic instruments is difficult, e.g. inflammable atmospheres in oil and gas production, it can also be used for underwater\* coating inspection. The “V” grooved base also makes it ideal for pipeline inspection.

Technical Specification

| Part Number          | Description   | Range             | Certificate |
|----------------------|---|-------------------|-------------|
| A211F--1M            | Elcometer 211 Coating Thickness Gauge   | 0 - 1,000 $\mu$ m | ○           |
| A211F--8M            | Elcometer 211 Coating Thickness Gauge   | 0.65 - 6mm        | ○           |
| A211F--1E            | Elcometer 211 Coating Thickness Gauge   | 0 - 40mils        | ○           |
| A211F--8E            | Elcometer 211 Coating Thickness Gauge   | 25 - 250mils      | ○           |
| Accuracy             | $\pm 5\%$ of the reading or $\pm 2.5\mu\text{m}/0.1\text{mil}$ (whichever is the greater) |                   |             |
| Substrate Thickness  | 0.4mm (16mils) minimum  |                   |             |
| Measurement Area     | 30mm (1.18") Diameter minimum   |                   |             |
| Measurement Diameter | 20mm (0.8") minimum   |                   |             |
| Edge Effects         | Must be at least 6mm (0.24") from edge  |                   |             |
| Dimensions           | 200 x 60 x 30mm (7.8 x 2.4 x 1.2")  |                   |             |
| Packing List         | Elcometer 211, calibration foil set, carry pouch, wrist strap and operating instructions  |                   |             |

For a full range of calibration standards and foils sets see page 7-46



\* Underwater use voids the warranty and users should replace the gauges periodically

○ Optional Calibration Certificate available.







# Dry Film Thickness

Digital Gauges 7-6

Mechanical Gauges 7-42

Foils & Standards 7-46

Destructive Gauges 7-52



### Elcometer 990

### Individual Precision Foils



Calibration foils or 'shims' are the most convenient way of creating a coating thickness standard on the substrate material, surface finish or form. This is the ideal method for adjusting the calibration of the coating thickness gauge to ensure the greatest possible accuracy.

#### Technical Specification

| Part Number              | Colour       | Dimensions               | Values <sup>1</sup> | Certificate <sup>2</sup> |
|--------------------------|--------------|--------------------------|---------------------|--------------------------|
| T99022570-1A             | Silver       | 50 x 25mm (1.97 x 0.98") | 12.5µm (0.5mil)     | ○                        |
| T99022570-2A             | Purple       | 50 x 25mm (1.97 x 0.98") | 25µm (1.0mil)       | ○                        |
| T99022570-2B             | Purple       | 75 x 50mm (2.95 x 1.97") | 25µm (1.0mil)       | ○                        |
| T99022570-4A             | Dark Blue    | 50 x 25mm (1.97 x 0.98") | 50µm (2.0mils)      | ○                        |
| T99022570-4B             | Dark Blue    | 75 x 50mm (2.95 x 1.97") | 50µm (2.0mils)      | ○                        |
| T99022570-6A             | Green        | 50 x 25mm (1.97 x 0.98") | 75µm (3.0mils)      | ○                        |
| T99022570-7A             | Brown        | 50 x 25mm (1.97 x 0.98") | 125µm (5.0mils)     | ○                        |
| T99022570-7B             | Brown        | 75 x 50mm (2.95 x 1.97") | 125µm (5.0mils)     | ○                        |
| T99022570-9A             | Peacock Blue | 50 x 25mm (1.97 x 0.98") | 175µm (7.0mils)     | ○                        |
| T99022570-10A            | White        | 50 x 25mm (1.97 x 0.98") | 250µm (10mils)      | ○                        |
| T99022570-10B            | White        | 75 x 50mm (2.95 x 1.97") | 250µm (10mils)      | ○                        |
| T99022570-12A            | Black        | 50 x 25mm (1.97 x 0.98") | 500µm (20mils)      | ○                        |
| T99022570-12B            | Black        | 75 x 50mm (2.95 x 1.97") | 500µm (20mils)      | ○                        |
| T99022570-14A            | Grey-Blue    | 50 x 25mm (1.97 x 0.98") | 1,000µm (40mils)    | ○                        |
| T99022570-14B            | Grey-Blue    | 75 x 50mm (2.95 x 1.97") | 1,000µm (40mils)    | ○                        |
| T99022570-16A            | Clear        | 50 x 25mm (1.97 x 0.98") | 1mm (40mils)        | ○                        |
| T99022570-17A            | Off White    | 50 x 25mm (1.97 x 0.98") | 1,500µm (60mils)    | ○                        |
| T99022570-18A            | Clear        | 50 x 25mm (1.97 x 0.98") | 2mm (80mils)        | ○                        |
| T99022570-18B            | Clear        | 75 x 50mm (2.95 x 1.97") | 2mm (80mils)        | ○                        |
| T99022570-20A            | Clear        | 50 x 25mm (1.97 x 0.98") | 3mm (120mils)       | ○                        |
| T99022570-21A            | Clear        | 50 x 25mm (1.97 x 0.98") | 4mm (160mils)       | ○                        |
| T99022570-23A            | Clear        | 50 x 25mm (1.97 x 0.98") | 8mm (310mils)       | ○                        |
| T99022570-24B            | Clear        | 75 x 50mm (2.95 x 1.97") | 9.5mm (370mils)     | ○                        |
| T99022570-25B            | Grey         | 75 x 50mm (2.95 x 1.97") | 15mm (590mils)      | ○                        |
| T99022570-26B            | Grey         | 75 x 50mm (2.95 x 1.97") | 25mm (980mils)      | ○                        |
| T45618978-2 <sup>3</sup> | Grey         | n/a                      | 1,500µm (60mils)    | ○                        |
| T45618978-3 <sup>3</sup> | Grey         | n/a                      | 5,000µm (197mils)   | ○                        |

<sup>1</sup> Actual foil values may vary, but are accurately labelled

<sup>2</sup> A certificates can be supplied with any combination of up to 8 Foils (but not As and Bs together)

<sup>3</sup> For use with the high temperature PINIP™ probes only due to the potential high temperature of the sample. Foils supplied in a cap which fits over the PINIP™ probe.

○ Optional Calibration Certificate available.

**Elcometer 990****Calibration Foils Sets**

The Elcometer 990 Calibration Foils are ideal for use in the laboratory, on the production line or on site. Calibration foils or 'shims' are the most convenient way of creating a coating thickness standard on the substrate material, surface finish or form. This is the ideal method for adjusting the calibration of the coating thickness gauge to ensure the greatest possible accuracy.

**Features:**

- Metric and Imperial values displayed on each foil
- Available individually or in foil sets
- Precision foils with  $\pm 1\%$  accuracy
- Each foil has a unique serial number for traceability
- Available in thicknesses from 12.5 $\mu\text{m}$  to 20mm (0.5 to 790mils)

**Technical Specification**

| Description  | Foil Values ( $\mu\text{m}$ )                 | Foil Values (mils)                    | Un-Certified | Certified    |
|--|---|---------------------------------------|--------------|--------------|
| Scale 1 Foil Set; 0-1500 $\mu\text{m}$<br>(0-60mils) | 25, 50, 125, 250, 500,<br>1,000               | 1.0, 2.0, 5.0, 10, 20, 40             | T99022255-1  | T99022255-1C |
| Scale 2 Foil Set; 0-5mm<br>(0-200mils)               | 25, 50, 125, 250, 500,<br>1,000, 2,000, 3,000 | 1.0, 2.0, 5.0, 10, 20, 40,<br>80, 120 | T99022255-2  | T99022255-2C |
| Scale 3 Foil Set; 0-13mm<br>(0-500mils)              | 250, 500, 1,000, 2,000,<br>4,000, 8,000       | 10, 20, 40, 80, 160, 315              | T99022255-3  | T99022255-3C |
| Scale 4 Foil Set; 0-250 $\mu\text{m}$<br>(0-10mils)  | 12.5, 25, 50, 125, 250                        | 0.5, 1.0, 2.0, 5.0, 10                | T99022255-4  | T99022255-4C |
| Scale 5 Foil Set; 0-800 $\mu\text{m}$<br>(0-32mils)  | 12.5, 25, 50, 125, 250, 500                   | 0.5, 1.0, 2.0, 5.0, 10, 20            | T99022255-5  | T99022255-5C |
| Scale 6 Foil Set; 0-30mm<br>(0-1200mils)             | 1,000, 2,000, 5,000, 9,500,<br>15mm, 25mm     | 40, 80, 200, 375, 590, 980            | T99022255-6  | T99022255-6C |
| Scale M3 Foil Set; 0-500 $\mu\text{m}$<br>(0-20mils) | 12.5, 25, 50, 125, 250, 500                   | 0.5, 1.0, 2.0, 5.0, 10, 20            | T99022255-7  | T99022255-7C |
| Scale 2B Foil Set*; 0-5mm<br>(0-200mils)             | 25, 50, 125, 250, 500,<br>1,000, 2,000, 2,000 | 1.0, 2.0, 5.0, 10, 20, 40,<br>80, 80  | T99022255-8  | T99022255-8C |

**Using Calibration Foils**

Each foil has been independently measured at the centre point.

For the greatest accuracy, place the probe in the centre of the foil.

Up to 4 foils can be combined to create a wider range of thickness values.



\* The Scale 2B foil sets are designed for soft coating probes and have a larger foil surface area.

## Elcometer 990

## Zero Test Plates



Elcometer provides a range of Zero Test Plates. When used in conjunction with a set of foils, Test Plates are ideal to test a coating thickness gauge's functionality.

For a list of standards, foils and foil sets, see page 7-46.



### Technical Specification

| Description                             | Size           | Size       | Ferrous   | Non-Ferrous | Certificate |
|---|----------------|------------|-----------|-------------|-------------|
| Precision Zero Test Plate ( $\pm 1\%$ ) | 50.8 x 25.4mm  | 2.0 x 1.0" | T9994910- | T9994911-   |             |
| Zero Test Plate                         | 76.2 x 50.8mm  | 3.0 x 2.0" | T9999529- | T9999530-   |             |
| Zero Test Plate (large)                 | 76.2 x 101.6mm | 3.0 x 4.0" | T9994054- | T9994055-   | o           |
| Steel (F) Checkpiece*                   | 50.8 x 88.9mm  | 2.0 x 3.5" | T99916925 | -           |             |
| Aluminium (N) Checkpiece*               | 50.8 x 88.9mm  | 2.0 x 3.5" | -         | T99916901   |             |

\* To be used only with the Elcometer 311 or Elcometer 415

o Optional Calibration Certificate available.



# For all your Industrial Finishing & Physical Test Equipment

visit [industrial.elcometer.com](http://industrial.elcometer.com)



Oven Temperature Profiling

**Elcometer 215 Oven Data Logger**

The Elcometer 215 is the easy to use oven temperature profile solution, used to measure and store the temperature profiles of both the sample and the oven during the cure process.

- Memory stores up to 260,000 readings
- Ideal for testing powder or liquid coatings in batch or conveyor ovens
- Variable measurement interval, date, time, °C/°F
- Large menu-driven display for easy operation
- Event colour reports directly from the CookMaster® software
- Quick display shows maximum temperature, Cure-max figure and pass/fail for each probe
- High temperature resistant Teflon coated probe cables are easy to clean after each run
- Start and stop logging at a pre-set temperature
- Ideal in situations where powder coating thickness is inconsistent

Measure up to 8 different temperatures at one time

**elcometer**

**Elcometer 215 Oven Data Logger**

The logger display shows maximum temperature and Cure-Index figure, percentage and pass/fail sign, as a value or graphic representation for each probe.

**Powerful**

- Stores up to 260,000 readings
- USB data output to CookMaster® software, combines with other key inspection measurements

**Efficient**

- Measure up to 8 different temperatures at one time
- Quick display shows maximum temperature, Cure-Index figure and pass/fail for each probe
- Start and stop logging at a pre-set temperature

**Rugged**

- Standard Thermal Barrier Kits - Ideal for single runs
- High temperature barrier and heat sinks available for longer times at high temperature
- Wide range of K-type temperature probes with strong, highly flexible and easy to clean Teflon® coated cables

**Flexible**

- Ideal for testing powder or liquid coatings in batch or conveyor ovens
- Variable measurement intervals, date, time, °C/°F

**Probes**

- Clamp air probe
- Clamp surface probe
- Magnetic surface probe
- Combined clamp & magnetic surface probe
- Probe ID Tags

**Standard Thermal Barrier Kit**

**High Temperature Barrier Kit**

Coatings Inspection Equipment





# Dry Film Thickness

Digital Gauges

7-6

Mechanical Gauges

7-42

Foils & Standards

7-46

Destructive Gauges

7-52



**Elcometer 121/4**

**Standard & Top Paint Inspection Gauges (P.I.G.)**

Available in two models, the **Elcometer 121** Paint Inspection Gauge (P.I.G.) is designed to measure the paint thickness of single or multiple layers of coatings.

Made of anodised aluminium for durability


A simple rotation of the cutter holder changes the cutting tool

Bright LED light source for clear vision

Compact and convenient, ideal for use in confined areas



Top model can hold one cross hatch cutter & three standard cutters

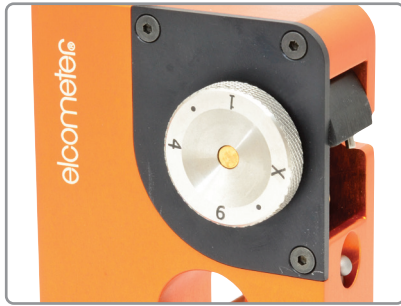**Elcometer 121/4****Standard & Top Paint Inspection Gauges (P.I.G.)**

Available in two models, the Elcometer 121 Paint Inspection Gauge is designed to measure the thickness of single or multiple layers of coatings.

Both models are supplied with illuminated integrated graticule microscopes.

The Top model has an internal carousel allowing each of the three cutters to be selected easily together with a cross hatch adhesion tester.

**Technical Specification**

|              | Description  |                            |             |
|--------------|--|----------------------------|-------------|
|              | Elcometer 121/4 Standard P.I.G.  | Elcometer 121/4 Top P.I.G. | Certificate |
| Part Number  | <b>A121---S</b>  | <b>A121---T</b>            | ○           |
| Range        | 2 - 2,000µm (0.08 - 80mils) Accuracy is dependent on tool cut angle, half a division   |                            |             |
| Dimensions   | 110 x 75 x 30mm (4.3 x 3 x 1.2"), 369g (13oz) 110 x 75 x 40mm (4.3 x 3 x 1.6 ), 383g (13.5oz)  |                            |             |
| Packing List | Elcometer 121/4, cutters 1, 4 and 6, microscope (x50 magnification), 4 x AG3 batteries for lamp (fitted), hexagonal wrench, black marker pen, wrist strap, carry case and operating instructions |                            |             |

**Accessories**

| Part Number         | Description                      | Angle | Measurement Range           | Graticule     | Certificate |
|---------------------|----------------------------------|-------|-----------------------------|---------------|-------------|
| <b>T99915761-1</b>  | Tungsten Carbide Cutter No 1     | 45°   | 20 - 2,000µm (1 - 80mils)   | 20µm (1mil)   | ○           |
| <b>T99915761-4</b>  | Tungsten Carbide Cutter No 4     | 26.6° | 10 - 1,000µm (0.5 - 35mils) | 10µm (0.5mil) | ○           |
| <b>T99915761-6</b>  | Tungsten Carbide Cutter No 6     | 5.7°  | 2 - 200µm (0.1 - 8mils)     | 2µm (0.1mil)  | ○           |
|                     |                                  |       | Coating Thickness           | Standard      |             |
| <b>T99913700-1</b>  | X-Hatch Cutter, 6 teeth x 1mm    |       | 0 - 60µm (0 - 2.4mils)      | ISO           | ○           |
| <b>T99913700-2</b>  | X-Hatch Cutter, 11 teeth x 1mm   |       | 0 - 50µm (0 - 2.0mils)      | ASTM          | ○           |
| <b>T99913700-3</b>  | X-Hatch Cutter, 11 teeth x 1.5mm |       | 0 - 60µm (0 - 2.4mils)      | -             | ○           |
| <b>T99913700-4</b>  | X-Hatch Cutter, 6 teeth x 2mm    |       | 50 - 125µm (2.0 - 5.0mils)  | ASTM          | ○           |
| <b>T99913700-4</b>  | X-Hatch Cutter, 6 teeth x 2mm    |       | 0 - 60µm (0 - 2.4mils)      | ISO           | ○           |
| <b>T99913700-4</b>  | X-Hatch Cutter, 6 teeth x 2mm    |       | 61 - 120µm (2.4 - 4.7mils)  | ISO           | ○           |
| <b>T99913700-5</b>  | X-Hatch Cutter, 6 teeth x 3mm    |       | 121 - 250µm (4.8 - 9.8mils) | ISO           | ○           |
| <b>K0001539M001</b> | Adhesion Tape (1 roll)           |       |                             | ASTM          |             |
| <b>T9998894-</b>    | Adhesion Tape (2 rolls)          |       |                             | ASTM          |             |
| <b>T9999358-1</b>   | Adhesion Tape (1 roll)           |       |                             | ISO           |             |
| <b>T9999358-2</b>   | Adhesion Tape (2 rolls)          |       |                             | ISO           |             |


**STANDARDS:**

AS 1580.108.2, AS 1580.408.4\*, AS 3894.9\*, ASTM D 3359-B\*, ASTM D 4138-A, BS 3900-C5-5B, BS 3900-E6\*, DIN 50986, ECCA T6\*, EN 13523-6\*, ISO 2808-5B, ISO 16276-2\*, ISO 2409\*, ISO 2808-6B, JIS K 5600-1-7, NF T30-038\*, NF T30-123

\* Standards apply to Top Model only  
○ Optional Calibration Certificate available.

## Elcometer 141

## Paint Inspection Gauge

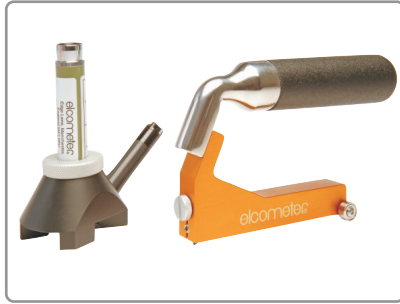

The Elcometer 141 Paint Inspection Gauge (P.I.G.) provides a useful method for determining the paint thickness of both single and multiple layer coatings.

The Paint Inspection Gauge is ideal for use on metallic & non-metallic substrates such as wood, glass and plastics.

- Large easy grip handle - makes cutting thick or hard coatings easy
- Internal cutter storage compartment
- x50 magnification microscope

### STANDARDS:

AS 1580.108.2, ASTM D 4138-A,  
BS 3900-C5-5B, DIN 50986,  
ISO 2808-5B, ISO 2808-6B,  
JIS K 5600-1-7, NF T 30-123

### Technical Specification

| Part Number                   | Description   | Certificate |
|-------------------------------|---|-------------|
| <b>A141----</b> D             | Elcometer 141 Paint Inspection Gauge  | ○           |
| Scale Range                   | 0 to 1.8mm (0 to 0.07")   |             |
| Scale Resolution              | 0.02mm (0.001")   |             |
| Dimensions (fitted to handle) | 160 x 100 x 35mm (6.3 x 4 x 1.4")   |             |
| Weight (fitted to handle)     | 510g (1lb 2oz)  |             |
| Packing List                  | Elcometer 141 P.I.G, microscope (x50 magnification), 3 cutters, marker pen, hexagonal wrench, carry case and operating instructions |             |

### Accessories

| Part Number        | Description                  | Cutting Angle | Measurement Range           | Graticule Scale Factor | Certificate |
|--------------------|------------------------------|---------------|-----------------------------|------------------------|-------------|
| <b>T99915761-1</b> | Tungsten Carbide Cutter No 1 | 45°           | 20 - 2,000µm (1 - 80mils)   | 20µm (1mil)            | ○           |
| <b>T99915761-4</b> | Tungsten Carbide Cutter No 4 | 26.6°         | 10 - 1,000µm (0.5 - 35mils) | 10µm (0.5mil)          | ○           |
| <b>T99915761-6</b> | Tungsten Carbide Cutter No 6 | 5.7°          | 2 - 200µm (0.1 - 8mils)     | 2µm (0.1mil)           | ○           |

○ Optional Calibration Certificate available.



## Using the Paint Inspection Gauge




1. Take the coated product.




2. Using the supplied marker, draw a line across the coating in order to create a contrast when viewing the coating so that the top surface can be identified.



3. Using the P.I.G, make a cut at right angles to the marker line, all the way down to the substrate.



4. Using the microscope supplied, measure the width of the cut coating as a number of graticule divisions.

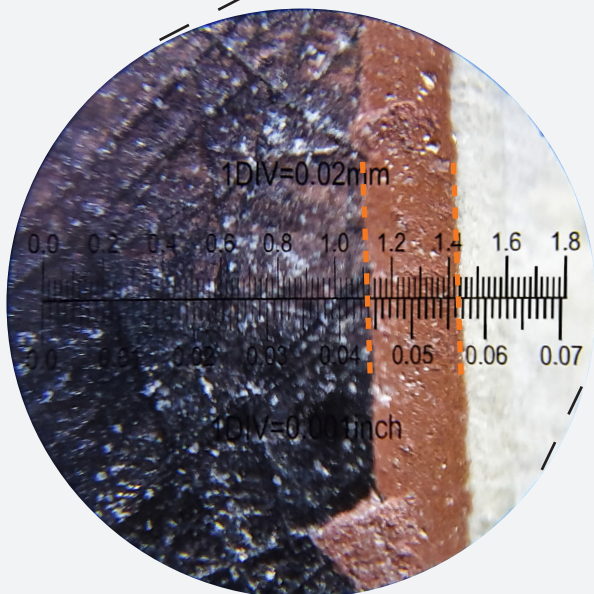

5. To convert the width of the cut coating into coating thickness, multiply the number of graticule divisions by the graticule scale factor.

6. In the example shown the coating thickness using cutting tool #1 is:

15 divisions x 20µm per division = 300µm  
or;  
12 divisions x 1mil per division = 12mils

| Cutting tool # | Practical maximum thickness <sup>a</sup> |        | Cutting angle | Graticule scale factor |                   |
|----------------|--|--------|---------------|------------------------|-------------------|
|                | (µm)                                     | (mils) |               | mm scale (µm)          | inch scale (mils) |
| 1              | 1600                                     | 64     | 45°           | 20                     | 1                 |
| 4              | 800                                      | 32     | 26.6°         | 10                     | 0.5               |
| 6              | 160                                      | 6.4    | 5.7°          | 2                      | 0.1               |

a. Based on using 80% of cutter width









# Adhesion Testing

Pull-Off Testers

8-6

Push Off Testers

8-24

Cross Hatch Testers

8-32





**From the largest man-made structures to the smallest household appliances, most manufactured products have a protective or cosmetic coating. Premature failure of this coating can, at the very least, result in additional costs of rework.**

Adhesion testing after the coating process will quantify the strength of the bond between substrate and coating, or between different coating layers or the cohesive strength of some substrates. Routine testing is used as part of inspection and maintenance procedures to help detect potential coating failures.

### **Adhesion Methods**

***Pull-Off Adhesion:*** simple to use, quantitative range giving a definitive adhesion value, ideal for the laboratory or field on flat or curved substrate applications. Tensile Dollies (or stubs) are glued to the coating and, when the adhesive has cured, the force required to pull the coating off the surface is measured.

***Push Off Adhesion:*** a dolly is adhered to the coating. When the adhesive has cured, the dolly is pushed off the surface by the adhesion tester. The push off design makes this method ideal for flat and curved surfaces.

***Cross Hatch/Cross Cut:*** a fast, low cost, visual comparison method for paint and powder coatings up to a thickness of 250µm (10mils). The coating is cut into small squares, thereby reducing lateral bonding, and the adhesion assessed against ISO, ASTM or Corporate Standards.

When selecting an adhesion gauge, it is important to use the same inspection test methods throughout the inspection to ensure accurate comparisons.

# Choose the correct Adhesion Tester for your protective coating adhesion test

## Automatic Pull-Off Adhesion

- Measures the pull force required to remove a dolly from the coating
- Automatic hydraulic pump ensures smooth and continuous pressure application for consistent, repeatable results
- Ideal for use on a wide range of substrates, including steel, aluminium, concrete, wood & plastic



## Manual Pull-Off Adhesion

- Measures the pull force required to remove a dolly from the coating
- Hand-held, ergonomic and fully portable - ideal for on-site adhesion testing
- Rotating crank handle applies an even uniform load up to 50MPa (7250psi)



## Manual Push-Off Adhesion

- Measures the pressure required to push an area of coating away from the substrate
- Ideal for flat or curved surfaces and both internal and external pipes



## Cross Hatch Cutter

- Provides an instant assessment of the quality of the bond to the substrate
- A quick change, four sided cutter allows adhesion testing on a wide range of coating thicknesses







# Adhesion

Pull-Off Testers

8-6

Push Off Testers

8-24

Cross Hatch Testers

8-32





### Elcometer 510

### Automatic Pull-Off Adhesion Tester

The **Elcometer 510** Automatic Pull-Off Adhesion Tester accurately measures the strength of the bond between the coating and the substrate.

Automatic hydraulic pump ensures smooth and continuous pressure application for consistent, repeatable results

Fully adjustable pull rates  
0.1-1.4MPa/s (15-203psi) to  
meet National and International  
Standards

Hand-held, waterproof  
rugged design equivalent  
to IP64

Store up to 60,000 readings with  
individual pull graphs in up to 2,500  
alpha numerical batches, complete  
with attribute failure information

User definable measurement  
range with an accuracy of  $\pm 1\%$  of  
full scale:  
10mm dolly: 100MPa / 14,400psi  
14.2mm dolly: 50MPa / 7,200psi  
20mm dolly: 25MPa / 3,600psi  
50mm dolly: 4MPa / 580psi

10, 14.2, 20 and 50mm  
diameter dolly options

User definable limits with  
unique pressure hold and  
release function

Intuitive & easy to use  
menu structure in multiple  
languages

#### STANDARDS:

ASTM C1583, ASTM D4541, ASTM D7234-12, AS/NZS 1580.408.5, BS 1881-207,  
DIN 1048-2, EN 1015-12, EN 12636, EN 13144, EN 1542, EN 24624, ISO 16276-1,  
ISO 4624, JIS K 5600 5-7, NF T30-606, NF T30-062



**Elcometer 510****Automatic Pull-Off Adhesion Tester**

Range of reusable dollies

**Efficient**

- Ideal for laboratory and field use
- 10, 14.2, 20 and 50mm (0.39, 0.56, 0.76 & 1.96") diameter reusable dollies
- Compatible with ElcoMaster® Software and ElcoMaster® Mobile App
- Measures on small, curved and flat surfaces



USB and Bluetooth® data output, compatible with ElcoMaster® Software

**Powerful**

- Suitable for use on metal, wood, concrete and other substrates
- Smooth load application up to 100MPa (14,400psi)
- USB and Bluetooth® data output to iOS† or Android™ devices
- Stores up to 60,000 readings in 2,500 batches



Sealed, heavy duty and impact resistant

**Durable**

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP64
- Suitable for use in harsh environments

An accuracy of  $\pm 1\%$  of full scale**Accurate**

- Measurement range up to 100MPa (14,400psi) with an accuracy of  $\pm 1\%$  of full scale
- Can be used in accordance with National & International Standards



\* The Elcometer 510 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

† Compatible with iPod, iPhone and iPad.




## Elcometer 510

## Automatic Pull-Off Adhesion Tester


### Key Features

#### Selectable Pull Rates

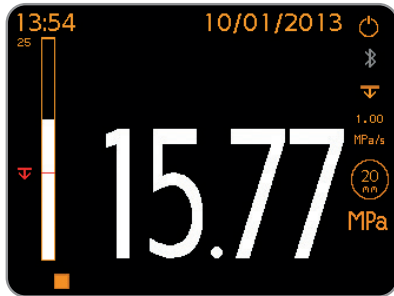


Automatic adhesion tester with selectable pull rates for 10, 14.2, 20 & 50mm diameter dollies.

#### Graphs & Statistics

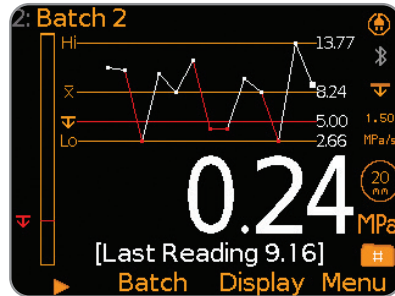

View trend graphs or live statistics alongside the reading value.

#### Pull Rate Graphs

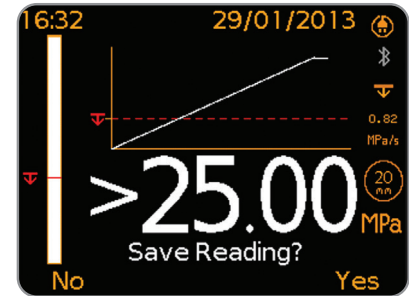


Individual user definable pull rate graphs can be saved with each reading.

#### Memory




Stores individual readings and pull rate graphs in up to 2,500 alphanumeric batches, together with the date, time and attribute information.

#### Limits

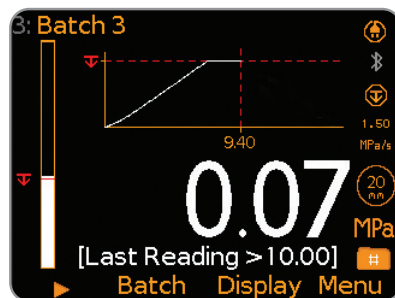

Either pull to maximum or pull to preset limit. Unique time hold feature allows users to set a delay before pressure returns to zero.

#### Failure Attributes

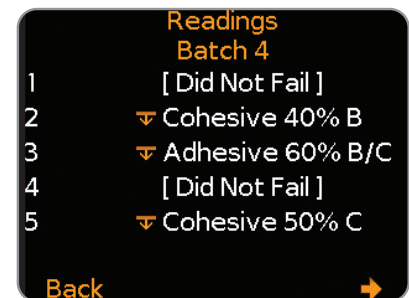

Save cohesive and adhesive failure attributes alongside your adhesion pull data in accordance with National and International Standards.

### Testing Coatings on Low Bond Strength Substrates

When testing coatings on low bond strength substrates such as concrete, wood or other fibrous materials, a larger surface area of dolly (50mm) is required to provide accurate, repeatable and reproducible results.

The Elcometer 510 is available as a Concrete Adhesion Tester Kit, or 50mm concrete accessory items (skirt, dolly, cutter) can be added to existing Elcometer 510 pull-off adhesion kits.



**Elcometer 510****Automatic Pull-Off Adhesion Tester****Key Features****Long Battery Life**

Powered by either standard rechargeable batteries or AC mains\*. Each battery charge performs up to 200 pulls. Battery recharge time <300 minutes.

**Robust Case**

Supplied in a robust plastic carry case for easy transportation to and around the job site.

**Anchor Clamp**

The optional magnetic anchor clamp ensures the actuator doesn't fall during tests on vertical surfaces or testing at height.

**Range of Dollies**

A range of interchangeable substrate skirt adaptors allow each gauge to be used with 10, 14.2, 20 or 50mm diameter reusable dollies, ideal for testing coatings on thin, thick, flat or convex substrates.

**Wireless**

Using wireless Bluetooth® communication link the gauge to an Android™ or iPhone mobile device. Live GPS coordinates from your mobile device can be added to reports and emailed instantly.

**Data Management**

Transfer data to your PC via USB or Bluetooth® for further analysis with ElcoMaster® software or view live pull rate graphs in ElcoMaster® Software during the test.

\* Model T only.

Elcometer 510

Automatic Pull-Off Adhesion Tester

Assessing The Results - Failure Attributes


Many National and International Standards, including ISO 4624 & ASTM D4541, require the user to record not only the pull-off force but also the nature of the failure. This is done by examining the bottom of the dolly and assessing the failure. In 'Advanced' Mode on the Elcometer 510 it is possible to select the 'Attributes' feature (Menu/Set up/Gauge Mode/Advanced) allowing the nature of the fracture to be recorded against each reading and stored within the batch.

Examining The Dolly


- a) Cohesive Failure: The coating fails within the body of a coating layer leaving the same coating on the surface and on the dolly face.
- b) Adhesive Failure: Failure occurs at the interface between layers (intercoat) where one pulls away from the other. The "coating" on the dolly face will not be the same as that on the test area.
- c) Glue Failure: When no coating is present on the dolly it must be recorded as a failure of the glue. This may be due to incorrect or insufficient mixing of the component parts of the adhesive, incompatibility between the adhesive/coating/dolly/test surface.

Dolly Face


Substrate





a) 50% Cohesive & 50% Adhesive failure



b) 100% Adhesive failure between two layers



c) Glue failure

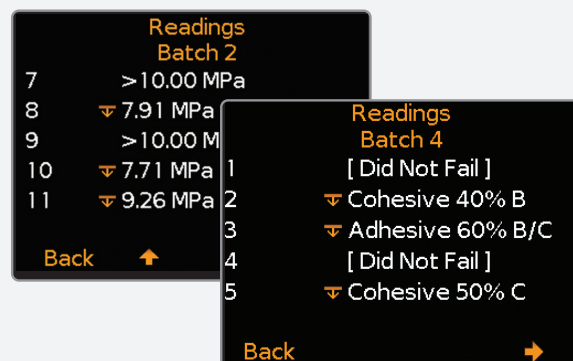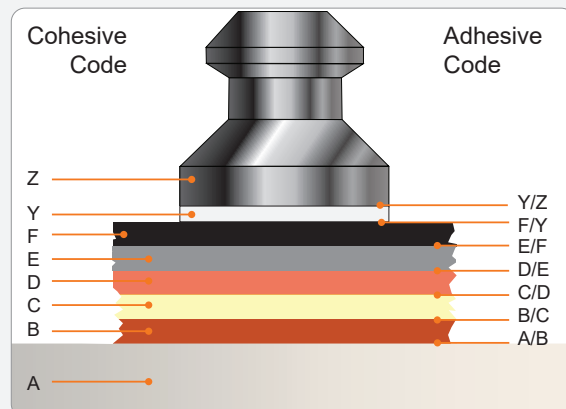

| Cohesive Failure Layer <sup>1</sup> |             | Adhesive Failure Layers |                     |
|-------------------------------------|-------------|-------------------------|---------------------|
| Code                                | Description | Code                    | Description         |
| A                                   | Substrate   | A/B                     | Substrate & Layer 1 |
| B                                   | Layer 1     | B/C                     | Layer 1 & Layer 2   |
| C                                   | Layer 2     | C/D                     | Layer 2 & Layer 3   |
| D                                   | Layer 3     | D/E                     | Layer 3 & Layer 4   |
| E                                   | Layer 4     | E/F                     | Layer 4 & Layer 5   |
| F                                   | Layer 5     | F/Y                     | Layer 5 & Glue      |
| Y                                   | Glue        | Y/Z                     | Glue & Dolly        |

The data is saved in the batch and can be viewed at any time displayed as

###.## MPa<sup>2</sup> N% A, M% A/B, where;

###.## MPa<sup>2</sup> = Pull Force in MPa or other measurement units (psi, Newtons or Nmm<sup>-2</sup>)  
 N% = Cohesive failure percentage<sup>3</sup>  
 A = Cohesive failure layer  
 M% = Adhesion failure percentage<sup>3</sup>  
 A/B = Intercoat adhesive failure layers

<sup>1</sup> The number of layers can be user defined for each batch via Batch/New Batch/Number of Layers. This will affect the number of layers available for selection during attribute recording. The maximum number of layers available is five, excluding the substrate and glue.

<sup>2</sup> Or equivalent units.

<sup>3</sup> To the nearest 10%, in line with International Standards.



**Elcometer 510****Automatic Pull-Off Adhesion Tester**

## Create instant reports with ElcoMaster® Software

What you do with the collected data is just as important as taking the readings themselves.

ElcoMaster® Software is a fast, easy to use software solution for all your data management and quality assurance needs, preparing professional inspection reports at the click of a button.




Whether you are out in the field or on the factory floor, using the ElcoMaster® Software Mobile App users can;

- Store live readings directly on to a mobile device and save them into batches.
- View the pull rate graph in real-time for the duration of the test.
- Add attribute data to each individual batch reading.
- Add photographs of the dolly and test surface to each individual batch reading at the click of a button.
- Plot individual readings on to a location map, photograph or diagram.
- Inspection data can be transferred from mobile to PC for further analysis and reporting.
- Generate instant .pdf report for submission.

Combine different inspection parameters (such as dry film thickness, surface profile, salt contamination, climate or adhesion) together with images, notes and other project specific information into customised reports.

Data transferred from the gauge to ElcoMaster® Software includes;

- Adhesion Measurements
- Date & Time
- Cohesive/Adhesive Failure Attributes
- Dolly size
- Pull rate graph
- Pull to Limit/Max
- Limit values
- Limit Hold Time
- Cutting Device
- Number of Layers
- Skirt Type/Support Ring Dimensions
- Batch Information & Statistics
- Calibration Information
- Calibration Verification Date/Time

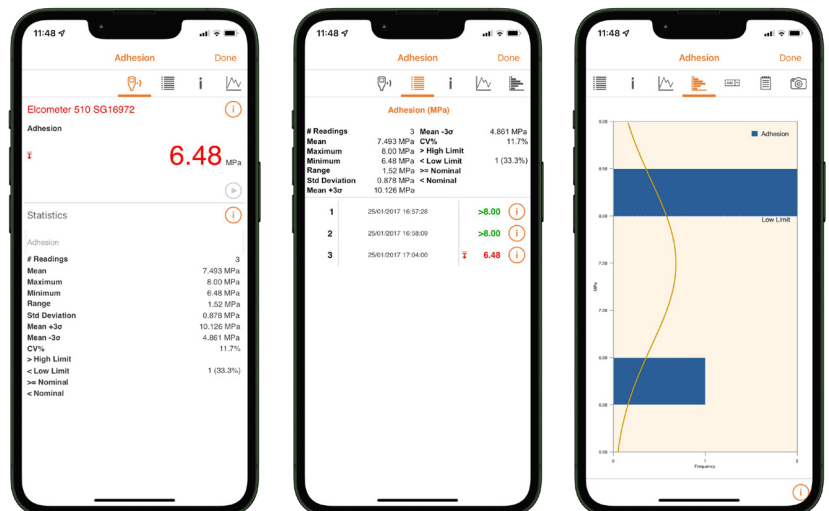

## Elcometer 510

## Automatic Pull-Off Adhesion Tester

### Product Features

|   | Model S | Model T             |
|---|---------|---------------------|
| Repeatable & reproducible measurements  | ■       | ■                   |
| Easy to use menu structure; <i>in multiple languages</i>  | ■       | ■                   |
| Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>                                       | ■       | ■                   |
| Bright LCD colour screen; <i>with ambient light sensor</i>  | ■       | ■                   |
| Scratch & solvent resistant display; 2.4" (6cm) TFT   | ■       | ■                   |
| Calibration certificate   | ■       | ■                   |
| 2 year gauge warranty <sup>1</sup>  | ■       | ■                   |
| Automatic rotating display; 0°, 180°  | ■       | ■                   |
| Data output via USB (Live readings - and batch)   | ■       | ■                   |
| Data output via Bluetooth®  |         | ■                   |
| PC command; <i>start &amp; stop gauge from a PC with live readings (USB only)</i>                           |         | ■                   |
| Switchable Units (MPa, psi, N, Nmm <sup>2</sup> )   | ■       | ■                   |
| On Screen Statistics ( $\eta$ , $\bar{x}$ , $\sigma$ , $H_i$ , $L_o$ , $CV\%$ , $N>hi$ limit <sup>2</sup> ) | ■       | ■                   |
| Pull Rate Indicator   | ■       | ■                   |
| Trend Graph   | ■       | ■                   |
| Pull Rate Graph ( <i>Load v Time</i> )  |         | ■                   |
| Interchangeable Dolly Selection; 10, 14.2, 20 & 50mm  | ■       | ■                   |
| User Selectable Pull Rates; (Model S & Model T Standard Mode)   |         |                     |
| 10mm: 1.00, 2.00, 3.00, 4.00, 5.00MPa/s    125, 200, 400, 600, 725psi/s                                     |         |                     |
| 14.2mm: 0.4, 0.7, 1.4, 2.0, 2.5MPa/s    60, 100, 200, 300, 360psi/s   | ■       | ■                   |
| 20mm: 0.2, 0.3, 0.7, 1.0, 1.2MPa/s    30, 50, 100, 150, 180psi/s  |         |                     |
| 50mm: 0.04, 0.08, 0.12, 0.16, 0.20MPa/s    5, 8, 16, 24, 30psi/s  |         |                     |
| User Selectable Pull Rates; (Model T Advanced Mode)   |         |                     |
| 10mm: 0.40 - 5.60MPa/s    58 - 812psi/s    in 0.1MPa / 1psi steps   |         |                     |
| 14.2mm: 0.20 - 2.80MPa/s    29 - 403psi/s    in 0.1MPa / 1psi steps   |         | ■                   |
| 20mm: 0.10 - 1.40MPa/s    15 - 203psi/s    in 0.1MPa / 1psi steps   |         |                     |
| 50mm: 0.02 - 0.22MPa/s    2 - 32psi/s    in 0.01MPa / 0.1psi steps  |         |                     |
| User Selectable Limit & Limit Hold Time   |         | ■                   |
| Gauge Memory; <i>maximum number of readings</i>   | 60      | 60,000 <sup>3</sup> |
| Number of Batches ( <i>Alpha Numeric - Model T</i> )  | 1       | 2,500               |
| Attribute Modes to meet National & International Standards  |         | ■                   |
| Display Modes   |         |                     |
| Readings, Selected Stats & Run Chart (last 20 readings)   | ■       | ■                   |
| Pull Rate Graphs  |         | ■                   |
| Batch Review  |         | ■                   |
| Power; <i>Battery (B), AC Mains Power (M)</i>   | B       | B, M                |
| USB Cable & ElcoMaster® Software CD   | ■       | ■                   |
| Power Cable with Multi International Plug Adaptor ( <i>UK, EU, US, AUS</i> )                                |         | ■                   |
| Plastic Transit Case  | ■       | ■                   |
| Date & Time   |         | ■                   |
| In Field Adhesion Calibration Verification Mode   | ■       | ■                   |

<sup>1</sup> The Elcometer 510 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). <sup>2</sup> Model T only. <sup>3</sup> When 'Rate Graph' is enabled, the number of readings which can be stored depends on the graph resolution selected.

## Elcometer 510

## Automatic Pull-Off Adhesion Tester

## Technical Specification

| Part Number                    | Description  |                                   |                                   |                                   | Certificate |
|--------------------------------|--|-----------------------------------|-----------------------------------|-----------------------------------|-------------|
| F510-20S                       | Elcometer 510 Model S Automatic Adhesion Tester; 20mm Kit  |                                   |                                   |                                   | ●           |
| F510-20T                       | Elcometer 510 Model T Automatic Adhesion Tester; 20mm Kit  |                                   |                                   |                                   | ●           |
| F510-50S                       | Elcometer 510 Model S Automatic Adhesion Tester; 50mm Concrete Kit   |                                   |                                   |                                   | ●           |
| F510-50T                       | Elcometer 510 Model T Automatic Adhesion Tester; 50mm Concrete Kit   |                                   |                                   |                                   | ●           |
| Pressure Accuracy              | ±1% of full scale  |                                   | Pull Rate Accuracy                | ±(2.5% + 0.3 seconds)             |             |
| Pressure Resolution            | 0.01MPa (1psi)   |                                   | Pull Rate Resolution              | 0.01MPa/s (1psi/s)                |             |
| Dolly Diameter                 | 10mm (0.39")   | 14.2mm (0.56")                    | 20mm (0.76")                      | 50mm (1.96")                      |             |
| Operating Range                | 8 - 100MPa<br>(1200 - 14400psi)  | 4 - 50MPa<br>(600 - 7200psi)      | 2 - 25MPa<br>(300 - 3600psi)      | 0.3 - 4MPa<br>(50 - 580psi)       |             |
| Pull Rate Range                | 0.4 - 5.6MPa/s<br>(58 - 812psi/s)  | 0.2 - 2.8MPa/s<br>(29 - 403psi/s) | 0.1 - 1.4MPa/s<br>(15 - 203psi/s) | 0.02 - 0.22MPa/s<br>(2 - 32psi/s) |             |
| Gauge Dimensions               | 260 x 100 x 66mm (6.3 x 3.9 x 2.6")  |                                   |                                   |                                   |             |
| Actuator Height <sup>1</sup>   | 85mm (3.4")  | 85mm (3.4")                       | 85mm (3.4")                       | 110mm (4.3")                      |             |
| Instrument Weight <sup>1</sup> | 2.9kg (6.4lb)  | 2.9kg (6.4lb)                     | 2.9kg (6.4lb)                     | 3.1kg (8.3lb)                     |             |
| Kit Weight                     | -  | -                                 | 6.1kg (13.5lb)                    | 7.3kg (16.1lb)                    |             |
| Power Supply                   | 8 x AA batteries (16 rechargeable batteries supplied complete with charger) or AC mains power (Model T only)   |                                   |                                   |                                   |             |
| Battery Life                   | ~200 pulls per charge up to 25MPa (3600psi) at 1MPa/s (150psi/s), recharge time <5 hours   |                                   |                                   |                                   |             |
| Packing List:<br>20mm Kit      | Elcometer 510 Adhesion Tester with 20mm dollies (x10), standard skirt for 20mm dollies, 20mm dolly cutter handle, 20mm dolly cutter, Araldite standard two part epoxy adhesive (2 x 15ml tubes), abrasive pad, shoulder harness, carry case, 16 x AA NiMH rechargeable batteries & charger (UK, EU, US, AUS), mains power supply (UK, EU, US, AUS) (Model T), ElcoMaster® Software CD & USB cable, calibration certificate and operating instructions. |                                   |                                   |                                   |             |
| Packing List:<br>50mm Kit      | Elcometer 510 Adhesion Tester with 50mm dollies (x6), standard skirt for 50mm dollies, 50mm dolly cutter arbor, 50mm dolly cutter, Araldite standard two part epoxy adhesive (2 x 15ml tubes), abrasive pad, shoulder harness, carry case, 16 x AA NiMH rechargeable batteries & charger (UK, EU, US, AUS), mains power supply (UK, EU, US, AUS) (Model T), ElcoMaster® Software CD & USB cable, calibration certificate and operating instructions.   |                                   |                                   |                                   |             |

## Accessories

| Dolly Diameter                  | Pack of 10 <sup>2</sup>   | Pack of 100    | Standard Skirt | Thin Substrate Skirt | Cutter Handle/<br>Arbor | Dolly Cutter |
|---------------------------------|---|----------------|----------------|----------------------|-------------------------|--------------|
| 10mm (0.39")                    | T5100010AL-10   | T5100010AL-100 | T9991420S      | -                    | -                       | -            |
| 14.2mm (0.56")                  | T9990014AL-10   | T9990014AL-100 | T9991420S      | T9990014T            | T9991420H               | T9990014CT   |
| 20mm (0.76")                    | T9990020AL-10   | T9990020AL-100 | T9991420S      | T9990020T            | T9991420H               | T9990020CT   |
| 50mm (1.96")                    | T9990050AL-4  | -              | T9990050S      | -                    | T9990050H               | T9990050CT   |
| 50mm (1.96")<br>Stainless Steel | T9990050SS-4  | -              | T9990050S      | -                    | T9990050H               | T9990050CT   |
| Part Number                     | Description   |                |                |                      |                         |              |
| T99923797                       | Magnetic Anchor Clamp - holds actuator securely during tests on vertical surfaces |                |                |                      |                         |              |
| T99912906                       | Araldite Standard Two Part Epoxy Adhesive, 2 x 15ml Tubes                         |                |                |                      |                         |              |
| T99923147                       | Dolly Cleaning Heating Tongs - EUR 220V / UK 240V                                 |                |                |                      |                         |              |
| T99923103                       | Dolly Cleaning Heating Tongs - US 110V  |                |                |                      |                         |              |

• Calibration Certificate supplied as standard.

<sup>1</sup> Including Actuator with Standard Skirt fitted.<sup>2</sup> 50mm (2") dollies are supplied in packs of 4.



**Elcometer 510**

**Automatic Pull-Off Adhesion Tester**


**Pull-Off Adhesion Tests - Preventing Adhesive and Cohesive Failures**

**Preparing the surface and dolly**

1. Select an appropriate test area which is flat and has sufficient area to attach the adhesion tester actuator.
2. Abrade the dolly and surface, clean both to remove any dust - minimising the risk of an 'adhesive' failure.

**Fixing the dolly**

3. Mix the adhesive correctly and apply a uniform adhesive film over the entire dolly face.
4. Test Standards require that the dolly is pulled off perpendicularly to the test surface. The dolly must therefore be adhered on to a prepared flat test surface (see images below). Apply an even pressure to the dolly to ensure that the dolly face is parallel to the test surface.
5. Remove any excess adhesive from around the dolly and allow to fully cure. Tape may be required when applying dollies to vertical surfaces during the cure process.
6. If required, once the dolly has fully cured, score the coating around the dolly.
7. Attach the actuator to the dolly and begin test.

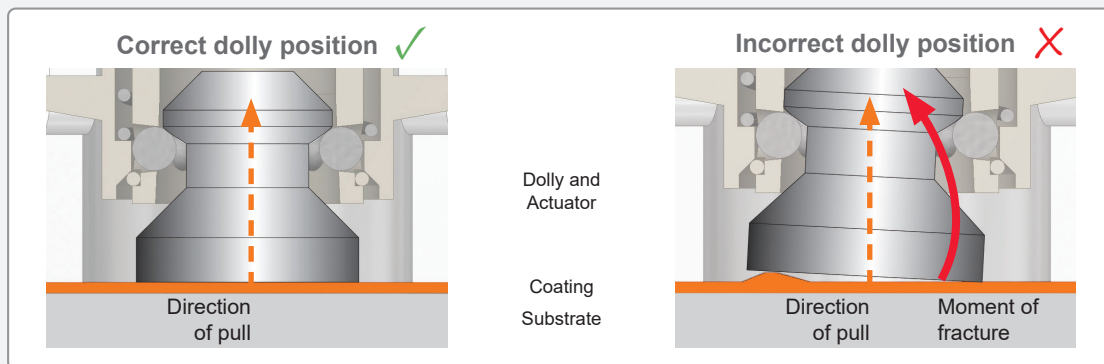

**Assessment of the Adhesion Test**


For a valid pull-test, the coating must cover at least 50% of the area of the dolly face. If the glue fails and no coating is present on the dolly, or it covers less than 50% of the dolly face area, the pull-test is invalid and should be repeated.

When the coating has failed within the layer leaving the same coating on both the dolly and the test panel it is known as a '*cohesive failure*'.

'*Adhesive failures*' occur when either the coating has failed at the interface with another coating (leaving a coating on the dolly and another coating on the substrate), or when the coating has failed at the substrate (leaving the coating on the dolly and the substrate bare).


NOTE: If the glue fails at a value above the specification then it can be reported that the adhesion exceeded the specification for this individual test.

**Coating Adhesion Testing on Concrete**

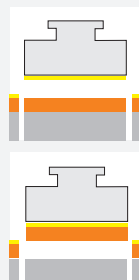

Adhesive Failure

Coating Failure

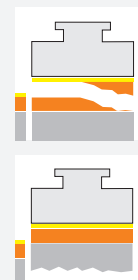

Partial Coating Failure

Concrete Failure

**Elcometer 506****Pull-Off Adhesion Tester**

The **Elcometer 506** Pull-Off Adhesion Testers allow the user to accurately measure the strength of the bond between the coating and the substrate.

**STANDARDS:**

ASTM D4541, ASTM D7234,  
AS/NZS 1580.408.5, BS 1881-207,  
DIN 1048-2, EN 12636, EN 13144,  
EN 1542, EN 24624, ISO 16276-1,  
ISO 4624, JIS K 5600-5-7,  
NF T30-606, NF T30-062

Hand-held, ergonomic and fully portable - ideal for on-site adhesion testing

Measurement range up to 50MPa (7250psi) with an accuracy of  $\pm 1\%$  of full scale

Rotating crank handle applies an even uniform load up to 50MPa (7250psi)

Safety harness clip prevents accidental damage of surrounding areas during tests on vertical surfaces

**2 YEAR\***  
WARRANTY

**etv** video available  
elcometer.tv

### Elcometer 506

### Pull-Off Adhesion Tester



Suitable for use in harsh environments

#### Powerful

- Suitable for use on metal, wood, concrete and other substrates
- Rugged & lightweight - ideal for frequent testing
- Smooth load application up to 50MPa (7250psi)



Quick connect coupling for 14.2, 20 and 50mm diameter dollies

#### Flexible

- Easy to use hand-held design
- Ideal for laboratory use
- 14.2, 20 and 50mm (0.56, 0.76 & 1.96") diameter reusable dollies
- Measures on small, curved and flat surfaces



Actuator skirts for a range of substrate thicknesses and bond strengths, on flat or curved surfaces, ideal for thin substrates

#### Accurate

- Measurement range up to 50MPa (7250psi) with an accuracy of  $\pm 1\%$  of full scale



Sealed, heavy duty and impact resistant

#### Durable

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP65
- Suitable for use in harsh environments

\* The Elcometer 506 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).



**Elcometer 506****Pull-Off Adhesion Tester****Technical Specification**

| Part Number                    | Description  | Certificate               |
|--------------------------------|--|---------------------------|
| <b>F506-20D</b>                | Elcometer 506 Digital Adhesion Tester Kit; 20mm  | ●                         |
| <b>F506-20DC</b>               | Elcometer 506 Digital Adhesion Tester Kit; 20mm - Certified  | ○                         |
| <b>F506-50D</b>                | Elcometer 506 Digital Adhesion Tester Kit; 50mm  | ●                         |
| <b>F506-50DC</b>               | Elcometer 506 Digital Adhesion Tester Kit; 50mm - Certified  | ○                         |
| Accuracy                       | ±1% of full scale  |                           |
| Pressure Rating                | 26MPa (3800psi)  |                           |
|                                | <b>14.2mm (0.56") Dolly</b>  | <b>20mm (0.76") Dolly</b> |
| Operating Range                | 4 - 50MPa (600 - 7200psi)  | 2 - 25MPa (300 - 3600psi) |
| Scale Resolution               | 0.01MPa (1psi)   | 0.01MPa (1psi)            |
| Instrument Length              | 290mm (11.5")  | 290mm (11.5")             |
| Actuator Height (skirt fitted) | 85mm (3.4")  | 110mm (4.3")              |
| Instrument Weight              | 1.8kg (4lb)  | 2.0kg (4.4lb)             |
| Kit Weight                     | 4kg (8.8lb)  | 5.2kg (11.5lb)            |
| Battery Type                   | 2 x AA batteries (digital gauge only)  | Battery Life: 2000 hours  |
| Packing List:                  |  |                           |
| 20mm Kit                       | Elcometer 506 Adhesion Tester with 20mm dollies (x10), standard skirt for 20mm dollies, 20mm dolly cutter handle, 20mm dolly cutter, Araldite standard two part epoxy adhesive (2 x 15ml tubes), abrasive pad, carry case, 2 x LR6 (AA) batteries (Digital Gauge only), test certificate and operating instructions. |                           |
| 50mm Kit                       | Elcometer 506 Adhesion Tester with 50mm dollies (x6), standard skirt for 50mm dollies, 50mm dolly cutter arbor, 50mm dolly cutter, Araldite standard two part epoxy adhesive (2 x 15ml tubes), abrasive pad, carry case, 2 x LR6 (AA) batteries (Digital Gauge only), test certificate and operating instructions.   |                           |

**Accessories**

| Dolly Diameter                  | Pack of 10 <sup>1</sup> | Pack of 100           | Standard Skirt   | Thin Substrate Skirt | Dolly Cutter Handle | Dolly Cutter      |
|---------------------------------|-------------------------|-----------------------|------------------|----------------------|---------------------|-------------------|
| 14.2mm (0.56")                  | <b>T9990014AL-10</b>    | <b>T9990014AL-100</b> | <b>T9991420S</b> | <b>T9990014T</b>     | <b>T9991420H</b>    | <b>T9990014CT</b> |
| 20mm (0.76")                    | <b>T9990020AL-10</b>    | <b>T9990020AL-100</b> | <b>T9991420S</b> | <b>T9990020T</b>     | <b>T9991420H</b>    | <b>T9990020CT</b> |
| 50mm (1.96")                    | <b>T9990050AL-4</b>     | -                     | <b>T9990050S</b> | -                    | <b>T9990050H</b>    | <b>T9990050CT</b> |
| 50mm (1.96")<br>Stainless Steel | <b>T9990050SS-4</b>     | -                     | <b>T9990050S</b> | -                    | <b>T9990050H</b>    | <b>T9990050CT</b> |

| Part Number      | Description   |
|------------------|---|
| <b>T99923797</b> | Magnetic Anchor Clamp - holds actuator securely during tests on vertical surfaces |
| <b>T99912906</b> | Araldite Standard Two Part Epoxy Adhesive, 2 x 15ml Tubes                         |
| <b>T99923147</b> | Dolly Cleaning Heating Tongs - EUR 220V / UK 240V                                 |
| <b>T99923103</b> | Dolly Cleaning Heating Tongs - US 110V  |

The Elcometer 506 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com). ● Test Certificate supplied as standard. ○ Calibration Certificate supplied as standard. <sup>1</sup> 50mm (2") dollies are supplied in packs of 4.

**Elcometer 106**

**Pull-Off Adhesion Tester**

The **Elcometer 106 Adhesion Tester** is easy to operate and is a fully portable Type II adhesion gauge which provides a numerical value for adhesion strength.

Hand-held, ergonomic and fully portable - ideal for on-site adhesion testing

Rotating handwheel applies a uniform load up to 22MPa (3200psi)

Quick connect coupling for 20 and 40mm diameter dollies

Available in 5 scale ranges to test the adhesion on coatings on a variety of substrates

**STANDARDS:**

AS 1580.408.5, ASTM D 4541,  
AS/NZS 1580.408.5, EN 13144,  
EN 24624, ISO 4624, ISO 16276-1,  
JIS K 5600-5-7, NF T30-062,  
NF T30-606



**Elcometer 106****Pull-Off Adhesion Tester**

- Supplied in a carry case - ideal for site tests
- Hand operated - no power supply necessary
- Includes a cutter for EN13144 and ISO 4624 tests

Applications for the Elcometer 106 Adhesion Test include paint or plasma spray on bridge decking, coatings on steel, aluminium, concrete, etc.

**Technical Specification**

| Part Number         | Description   | MPa (N/mm <sup>2</sup> ) | Range                            |            | Certificate |
|---------------------|---|--------------------------|----------------------------------|------------|-------------|
|                     |   |                          | kg/cm <sup>2</sup>               | psi        |             |
| F106----1           | Elcometer 106 Adhesion Tester - Scale 1   | 0.5 - 3.5                | 5 - 35                           | 72 - 500   | ○           |
| F106----2           | Elcometer 106 Adhesion Tester - Scale 2   | 1 - 7.0                  | 10 - 70                          | 145 - 1000 | ○           |
| F106----3           | Elcometer 106 Adhesion Tester - Scale 3   | 3 - 15                   | 30 - 150                         | 435 - 2000 | ○           |
| F106----4           | Elcometer 106 Adhesion Tester - Scale 4   | 5 - 22                   | 50 - 220                         | 725 - 3200 | ○           |
| F106----5           | Elcometer 106 Adhesion Tester - Scale 5   | 0.05 - 0.2               | 0.5 - 2.0                        | 7.25 - 30  | ○           |
| Dimensions          | Scales 1, 2, 5: 175 x 76mm (7 x 3") Scales 3 and 4: 185 x 76mm (7.5 x 3")   |                          |                                  |            |             |
| Dolly Diameter      | 20mm (0.76")  | Dolly Area               | 314mm <sup>2</sup> (0.49sq inch) |            |             |
| Gross weight of Kit | Scale 1, 2 and 5: 2.8kg (6.2lb)   | Scale 3: 4.2kg (9.3lb)   | Scale 4: 4.5kg (9.9lb)           |            |             |
| Packing List        | Elcometer 106 Pull-Off Adhesion Tester, pack of 20 dollies, Araldite adhesive, base support ring, magnetic dolly clamp, dolly cutter, carry case and operating instructions |                          |                                  |            |             |

**Accessories**

|             |   |
|-------------|---|
| T1062895-10 | Spare Dollies 20mm (0.76") Diameter (Pack of 10)          |
| T1062895-   | Spare Dollies 20mm (0.76") Diameter (Pack of 100)         |
| T1062914-   | Large Dollies 40mm (1.52") Diameter (Pack of 5)           |
| T1062915-   | Large Base Ring for 40mm (1.52") Dollies                  |
| T99912906   | Araldite Standard Two Part Epoxy Adhesive, 2 x 15ml Tubes |
| T99914009   | 20mm (0.76") Dolly Cutter                                 |

**Test Method**

A test dolly is bonded to the coating using an adhesive. The Elcometer 106 houses a spring arrangement which applies a lift force to the dolly as the tension is increased.

When the coating is pulled off the surface, an indicator on the scale shows the numerical value of adhesion expressed in terms of the force per unit area required to remove the dolly.

Inspection of the dolly face is required to determine the failure mode.

○ Optional Calibration Certificate available.



**Elcometer 106/6**

**Adhesion Tester for Coatings on Concrete**

The **Elcometer 106/6** Adhesion Tester has been specifically designed to measure coatings on concrete.

Rotating a hexagonal wrench applies an even uniform load up to 3.5MPa (500psi)

Hand-held, ergonomic and fully portable - ideal for on-site adhesion testing

50mm (2") diameter dollies for testing coatings on concrete

Dolly Cutting Tool available to isolate the coating according to ASTM standard test method



etv video available  
elcometer.tv

**STANDARDS:**

ASTM D 7234, BS 1881-207,  
DIN 1048-2, EN 1542, EN 12636

**Elcometer 106/6****Adhesion Tester for Coatings on Concrete**

Operating in a similar way to the regular Elcometer 106 Adhesion Tester, the Elcometer 106/6 uses a 50mm (2") diameter dolly for testing coatings on concrete.



The Elcometer 106/6 is fully portable and supplied in a carry case - making it ideal for on site tests.

**Technical Specification**


| Part Number         | Description   | Certificate |
|---------------------|---|-------------|
| <b>F106----</b> 6   | Elcometer 106 Coatings on Concrete Adhesion Tester - Scale 6  | ○           |
| Range               | 0 - 3.5MPa (N/mm <sup>2</sup> ) 0 - 500psi  |             |
| Dimensions          | 105 x 210mm (4 x 8")  |             |
| Gross weight of Kit | 5.7kg (12.6lb)  |             |
| Packing List        | Elcometer 106/6 Coatings on Concrete Adhesion Tester, 5 x 50mm (2") dolies, support ring, Araldite adhesive, ratchet spanner, carry case and operating instructions |             |

**Accessories**


|                     |   |
|---------------------|---|
| <b>T10618570</b>    | 50mm (2") Diameter Dolies (Pack of 5)                     |
| <b>KT001910P122</b> | 50mm (2") Diameter Dolly Cutting Tool                     |
| <b>T99912906</b>    | Araldite Standard Two Part Epoxy Adhesive, 2 x 15ml Tubes |

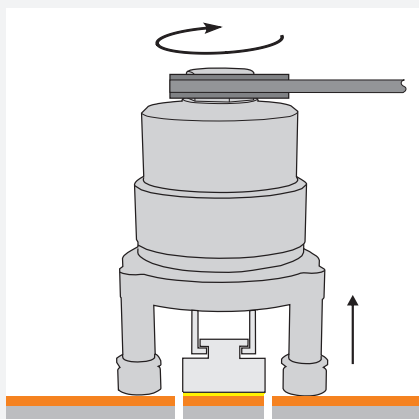**Coating Adhesion Testing on Concrete**


Adhesive Failure



Partial Coating Failure



Coating Failure



Concrete Failure

○ Optional Calibration Certificate available.





# Adhesion

Pull-Off Testers

8-6

Push Off Tester

8-24

Cross Hatch Testers

8-32



**Elcometer 508**

**Digital Push Off Adhesion Tester**

The extremely versatile **Elcometer 508** Type III<sup>1</sup> adhesion tester can be used for many adhesion testing requirements on flat or curved (concave and convex) surfaces such as pipelines and tanks.

Compatible with standard, convex and concave dollies

Hand-held, ergonomic and fully portable  
- ideal for on-site adhesion testing

Measurement range up to 25MPa (3630psi) with a full scale accuracy of  $\pm 1.5\%$

Rotating crank handle applies smooth loading from 2 up to 25MPa (3630psi)

Quick connect coupling for easy connection to the dolly

etv video available  
elcometer.tv

**2** YEAR<sup>2</sup>  
WARRANTY

**STANDARDS:**

ASTM D 4541, ISO 16276-1,  
NF T30-606

<sup>1</sup> Type III in accordance with ASTM D 4541. <sup>2</sup> The Elcometer 508 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

**Elcometer 508****Digital Push Off Adhesion Tester****Powerful**

- Suitable for use on flat, concave & convex surfaces
- Rugged & lightweight
- Smooth load application up to 25MPa (3630psi)

**Durable**

- Sealed, heavy duty & impact resistant
- Dust & waterproof equivalent to IP65
- Suitable for use in harsh environments

**Flexible**

- Easy to use hand-held design
- Ideal for field use on tanks & pipelines
- Reusable stainless steel dollies
- MPa / psi switchable

**Accurate**

- Measurement range up to 25MPa (3630psi)
- Full scale accuracy of  $\pm 1.5\%$
- Maximum hold - displays the highest value reached

**Technical Specification**

| Part Number       |                  | Description   | Certificate |
|-------------------|------------------|---|-------------|
| UK 240V/EUR 220V  | US 110V          |   |             |
| <b>F508-DD</b>    | <b>F508-DC</b>   | Elcometer 508 Digital Push Off Adhesion Tester  | •           |
| Dolly Size        | Outside Diameter | 19.4mm (0.76")  |             |
|                   | Inside Diameter  | 3.7mm (0.15")   |             |
|                   | Area             | 284mm <sup>2</sup> (0.44sq inch)  |             |
| Scale Range       |                  | 0 - 26MPa (0 - 3800psi)   |             |
| Operating Range   |                  | 2 - 25MPa (290 - 3630psi)   |             |
| Scale Resolution  |                  | 0.01MPa (1psi)  |             |
| Accuracy          |                  | $\pm 1.5\%$ of full scale   |             |
| Power Supply      |                  | 2 x AA alkaline dry batteries (rechargeable batteries can be used)  |             |
| Weight            |                  | Gauge: 1.7kg (3.7lb)      Kit: 4.5kg (9.9lb)  |             |
| Instrument Length |                  | 290mm (11.5")      Coupling Height: 200mm (8")  |             |
| Packing List      |                  | Elcometer 508, transit case, 5 flat dollies, 5 dolly plugs, GR415 cyanoacrylate adhesive, dolly cleaning tool, 2 x LR6 (AA batteries), operating instructions and calibration certificate |             |

**Accessories**

| Part Number      | Description              | Part Number      | Description                                       |
|------------------|--------------------------|------------------|---|
| <b>T9999646-</b> | Standard Flat Dolly (x1) | -                | Concave & Convex Dollies available upon request   |
| <b>T99911135</b> | Cyanoacrylate Adhesive   | <b>T9994586-</b> | Dolly Cleaning Tool                               |
| <b>T99911136</b> | Dolly Plug (x5)          | <b>T99923147</b> | Dolly Cleaning Heating Tongs - EUR 220V / UK 240V |
| <b>T99914009</b> | Dolly Cutter             | <b>T99923103</b> | Dolly Cleaning Heating Tongs - US 110V            |

• Calibration Certificate supplied as standard.



**Elcometer 108**

**Hydraulic Adhesion Tester**

Ideal for tanks or pipelines, the **Elcometer 108** Hydraulic Adhesion Tester is an extremely versatile Type III<sup>1</sup> adhesion tester which can be used for many applications, even on flat or curved surfaces.

Compatible with standard, convex and concave dollies to test on flat or curved surfaces.

Hand-held, ergonomic and fully portable  
- ideal for on-site adhesion testing

Measurement range up to 25MPa (3630psi) with an accuracy of  $\pm 3\%$  or 0.4MPa (60psi) - whichever is the greater

Rotating crank handle applies smooth loading from 0 up to 25MPa (3630psi)

Quick connect coupling for easy connection to the dolly

**2 YEAR<sup>2</sup>**  
WARRANTY

**STANDARDS:**


ASTM D 4541, ISO 16276-1,  
NF T30-606

<sup>1</sup> Type III in accordance with ASTM D 4541

<sup>2</sup> The Elcometer 108 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

**Elcometer 108****Hydraulic Adhesion Tester**

Digital and analogue gauges available for harsh and hazardous environments

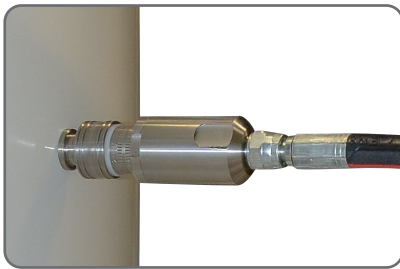

Safety coupling sleeve prevents accidental damage of surrounding areas during test on vertical surfaces



A wide range of curved dolliers available, each designed for a specific range of curvature



Sealed, heavy duty and impact resistant

**Powerful**

- Suitable for use on flat, concave & convex surfaces
- Rugged & lightweight
- Smooth load application up to 25MPa (3630psi)

**Flexible**

- Ideal for laboratory and field use
- Reusable stainless steel dolliers
- MPa / psi switchable

**Accurate**

- Measurement range up to 50MPa (7250psi) with an accuracy of  $\pm 3\%$
- Maximum hold - displays the highest value reached

**Durable**

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP65
- Suitable for use in harsh environments

## Elcometer 108

## Hydraulic Adhesion Tester

### Technical Specification

| Part Number                  |                  | Description   | Certificate |
|------------------------------|------------------|---|-------------|
| UK 240V/EUR 220V    US 110V  |                  |   |             |
| <b>F108---1D</b>             | <b>F108---1C</b> | Elcometer 108/1 Hydraulic Adhesion Tester - Analogue Dial Gauge   | ○           |
| <b>F108---2D</b>             | <b>F108---2C</b> | Elcometer 108/2 Hydraulic Adhesion Tester - Digital Gauge   | ○           |
| Scale Range                  |                  | Analogue: 0 - 25MPa (0 - 3600psi)<br>Digital: 0 - 25MPa (0 - 3600psi)   |             |
| Operating Range              |                  | Analogue: 2 - 18MPa (290 - 2600psi)<br>Digital: 2 - 18MPa (290 - 2600psi)   |             |
| Scale Resolution             |                  | Analogue: 1MPa (100psi)<br>Digital: 0.1MPa (1psi)   |             |
| Analogue Instrument Accuracy |                  | ±1MPa Metric Scale; 150psi Imperial Scale   |             |
| Digital Instrument Accuracy  |                  | ±3% or 0.4MPa (60psi) - whichever is the greater  |             |
| Dolly Size                   | Outside Diameter | 19.4mm (0.76")  |             |
|                              | Inside Diameter  | 3.7mm (0.15")   |             |
|                              | Area             | 284mm <sup>2</sup> (0.44sq inch)  |             |
| Packing List                 |                  | Elcometer 108, ABS carry case, 5 flat dollies, 5 nylon plugs, GR415 cyanoacrylate adhesive, dolly cleaning tool, 2 x LR6 (AA batteries) (Digital gauge only) and operating instructions |             |

### Accessories

|                  |   |
|------------------|---|
| <b>T99911135</b> | Cyanoacrylate Adhesive                            |
| <b>T9999646-</b> | Standard Flat Dolly 19.4mm (0.76")                |
| <b>T99923147</b> | Dolly Cleaning Heating Tongs - EUR 220V / UK 240V |
| <b>T99923103</b> | Dolly Cleaning Heating Tongs - US 110V            |

Concave & Convex dollies are available upon request





AS/NZS 1680.602.2, ASTM C594, ASTM D523, ASTM D1456, ASTM D2457, ASTM D4039,  
ASTM E430, ASTM E2387, BS 3900 D5, DIN 67530, ECCA T2, EN 12373-11, EN 13523-2,  
ISO 7668, ISO 2813, ISO 13803, JIS K 5600-4-7, JIS Z 8741, TAPPI T 653 (20°)

\* The Elcometer 480 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase visit [www.elcometer.com](http://www.elcometer.com).



Readings can be transferred to PC, iPhone, Android™ or other mobile devices via USB or Bluetooth® for instant reporting using ElcoMaster® Software.







# Adhesion

Pull-Off Testers

8-6

Push Off Testers

8-24

Cross Hatch Testers

8-32

8



### Elcometer 107

### Cross Hatch Cutter

The **Elcometer 107 Cross Hatch Cutter** provides an instant assessment of the quality of the bond to the substrate.

Robust design with a large non slip grip ideal for field or laboratory test

A quick change, four sided cutter allows adhesion testing on a wide range of coating thicknesses (1mm, 1.5mm, 2mm and 3mm)

Available as a basic kit or as a full kit supplied with either ASTM or ISO adhesive tape

Ideal for thin, thick or tough coatings on all surfaces

#### STANDARDS:

AS 3894.9, AS 1580.408.4,  
ASTM D 3359-B, BS 3900-E6,  
ECCA T6, EN 13523-6, ISO 2409,  
ISO 16276-2, JIS K 5600-5-6,  
NF T30-038

## Elcometer 107

## Cross Hatch Cutter



Due to its rugged construction, the Elcometer 107 Cross Hatch Cutter is ideal to assess the quality of the bond of thin, thick or tough coatings to a substrate on different types of surfaces.

With a range of interchangeable cutter blades available with different cutter spacings, the Elcometer 107 Cross Hatch Cutter can be used in accordance with a variety of Standards.

The Elcometer 107 is available as either a Basic Kit or as a Full Kit which includes a brush, magnifier (x6 magnification) and either ISO or ASTM adhesive tape.

## Technical Specification

| Part Number  | Description   | Cutter Type | Coating Thickness |               | Certificate |
|--------------|---|-------------|-------------------|---------------|-------------|
| F10713222-1  | Elcometer 107 Basic Kit   | 6 x 1mm     | 0 - 60µm          | 0 - 2.4mils   | ○           |
| F10713348-6  | Elcometer 107 Full Kit with ISO Tape  | 6 x 1mm     | 0 - 60µm          | 0 - 2.4mils   | ○           |
| F10713348-1  | Elcometer 107 Full Kit with ASTM Tape   | 6 x 1mm     | 0 - 50µm          | 0 - 2.0mils   | ○           |
| F10713222-2  | Elcometer 107 Basic Kit   | 11 x 1mm    | 0 - 50µm          | 0 - 2.0mils   | ○           |
| F10713348-2  | Elcometer 107 Full Kit with ASTM Tape   | 11 x 1mm    | 0 - 50µm          | 0 - 2.0mils   | ○           |
| F10713222-3  | Elcometer 107 Basic Kit   | 11 x 1.5mm  | 0 - 90µm*         | 0 - 3.5mils*  | ○           |
| F10713222-4  | Elcometer 107 Basic Kit   | 6 x 2mm     | 50 - 125µm        | 2.0 - 5.0mils | ○           |
| F10713348-9  | Elcometer 107 Full Kit with ISO Tape  | 6 x 2mm     | 61 - 120µm        | 2.4 - 4.7mils | ○           |
| F10713348-4  | Elcometer 107 Full Kit with ASTM Tape   | 6 x 2mm     | 50 - 125µm        | 2.0 - 5.0mils | ○           |
| F10713222-5  | Elcometer 107 Basic Kit   | 6 x 3mm     | 121 - 250µm       | 5.0 - 10mils  | ○           |
| Packing List | <b>Basic Kit:</b> Robust handle, cutter, hexagonal wrench, presentation storage case and instructions (together with Classification of Adhesion Test Results chart)<br><b>Full Kit:</b> Robust handle, cutter, hexagonal wrench, instructions (together with Classification of Adhesion Test Results chart), magnifier (x6 magnification), brush and adhesive tape (either ASTM or ISO tape), all in a plastic ABS carry case |             |                   |               |             |

## Accessories

| Part Number  | Description                         | Methods |      |    | Certificate |
|--------------|-------------------------------------|---------|------|----|-------------|
|              |                                     | ISO     | ASTM | AS |             |
| T99913700-1  | 6 x 1mm Four sided cutter blade     | •       | •    |    | ○           |
| T99913700-2  | 11 x 1mm Four sided cutter blade    |         | •    |    | ○           |
| T99913700-3  | 11 x 1.5mm Four sided cutter blade  |         |      |    | ○           |
| T99913700-4  | 6 x 2mm Four sided cutter blade     | •       | •    |    | ○           |
| T99913700-5  | 6 x 3mm Four sided cutter blade     | •       |      |    | ○           |
| K0001539M001 | Adhesive Tape (1 roll) ASTM D 3359  |         | •    |    |             |
| T9999358-1   | Adhesive Tape (1 roll) ISO 2409     | •       |      |    |             |
| T9998894-    | Adhesive Tape (2 rolls) ASTM D 3359 |         | •    |    |             |
| T9999358-2   | Adhesive Tape (2 rolls) ISO 2409    | •       |      |    |             |

\* Approximate Thickness

○ Optional Calibration Certificate available.

## Elcometer 1542

## Cross Hatch Adhesion Tester



The Elcometer 1542 is ideal for measuring the cross hatch adhesion of coatings up to 250µm (9.8mils) on flat surfaces and test panels.

Measure on large or small panels by quickly changing the position of the guide wheel using the hexagonal wrench provided.

Each cutter wheel consists of 8 cutting faces. When one face becomes worn, rotate the cutting wheel to the next face.

The Elcometer 1542 is available with three different cutter spacings 1, 2 & 3mm for a range of coating thickness (see table below).

The Elcometer 1542 is available on its own (Basic Kit) or as a Full Kit which includes a brush, magnifier & ISO or ASTM adhesive tape. There are also Advanced Kits which include all three (1, 2 & 3mm) cross hatch adhesion testers, together with either ISO or ASTM adhesive tape.

### STANDARDS:

AS 3894.9, AS 1580.408.4,  
ASTM D 3359-B, BS 3900-E6,  
ECCA T6, EN 13523-6, ISO 2409,  
ISO 16276-2, JIS K 5600-5-6,  
NF T30-038

### Technical Specification

| Part Number  | Description   | Cutter Type   | Coating Thickness |               | Certificate |
|--------------|---|---------------|-------------------|---------------|-------------|
| K1542M001    | Elcometer 1542 Basic Kit  | 6 x 1mm       | 0 - 60µm          | 0 - 2.4mils   | ○           |
| K1542M002    | Elcometer 1542 Basic Kit  | 6 x 2mm       | 50 - 125µm        | 2 - 5.0mils   | ○           |
| K1542M003    | Elcometer 1542 Basic Kit  | 6 x 3mm       | 121 - 250µm       | 4.8 - 9.8mils | ○           |
| K1542M001-I  | Elcometer 1542 Full Kit - ISO Tape  | 6 x 1mm       | 0 - 60µm          | 0 - 2.4mils   | ○           |
| K1542M002-I  | Elcometer 1542 Full Kit - ISO Tape  | 6 x 2mm       | 50 - 125µm        | 2.0 - 5.0mils | ○           |
| K1542M003-I  | Elcometer 1542 Full Kit - ISO Tape  | 6 x 3mm       | 121 - 250µm       | 4.8 - 9.8mils | ○           |
| K1542M001-A  | Elcometer 1542 Full Kit - ASTM Tape   | 6 x 1mm       | 0 - 60µm          | 0 - 2.4mils   | ○           |
| K1542M002-A  | Elcometer 1542 Full Kit - ASTM Tape   | 6 x 2mm       | 50 - 125µm        | 2 - 5.0mils   | ○           |
| K1542M204-I  | Elcometer 1542 Advanced Kit - ISO Tape  | 6 x 1, 2, 3mm | 0 - 250µm         | 0 - 9.8mils   | ○           |
| K1542M204-A  | Elcometer 1542 Advanced Kit - ASTM Tape   | 6 x 1, 2, 3mm | 0 - 250µm         | 0 - 9.8mils   | ○           |
| Packing List | <b>Basic Kit:</b> 1x Elcometer 1542 Cross Hatch Tester*, cutter angle adjustment tool, hexagonal wrench, transit case & user guide<br><b>Full Kit:</b> Basic Kit plus: brush, magnifier (x6 magnification) & ISO or ASTM adhesive tape<br><b>Advanced Kit:</b> 3 x Elcometer 1542 Cross Hatch Testers (1, 2 & 3mm), cutter angle adjustment tool, hexagonal wrench, brush, magnifier (x6 magnification), ISO or ASTM adhesive tape, transit case & user guide |               |                   |               |             |

### Accessories

| Part Number  | Description                        | Methods    |                                     |    | Certificate |
|--------------|------------------------------------|------------|-------------------------------------|----|-------------|
|              |                                    | ISO        | ASTM                                | AS |             |
| KT1542P001   | 6 x 1mm Cross Hatch Cutter Wheel   | •          |                                     |    | ○           |
| KT1542P002   | 6 x 2mm Cross Hatch Cutter Wheel   | •          | •                                   | •  | ○           |
| KT1542P003   | 6 x 3mm Cross Hatch Cutter Wheel   | •          |                                     |    | ○           |
| K0001539M001 | Adhesive Tape (1 roll) ASTM D 3359 | T9998894-  | Adhesive Tape (2 rolls) ASTM D 3359 |    |             |
| T9999358-1   | Adhesive Tape (1 roll) ISO 2409    | T9999358-2 | Adhesive Tape (2 rolls) ISO 2409    |    |             |
| T10713356    | Magnifier (x6 magnification)       | T99913357  | Cross Hatch Brush                   |    |             |

\* 6 x 1mm, 6 x 2mm or 6 x 3mm cutter dependent on Part Number.

○ Optional Calibration Certificate available.



**Elcometer 1540****Cross Hatch Adhesion Tester**

The Elcometer 1540 is a simple instrument for quickly determining the adhesion of a large variety of paints up to 50µm (2mils) thickness.







Made from steel, it has 11 tapered teeth with 1mm spacing. Two sets of lines are cut at right angles to obtain a pattern of 100 squares.

Results are determined by the table below.

**Technical Specification**

| Part Number  | Description                                | Certificate |
|--------------|--|-------------|
| K0001540M001 | Elcometer 1540 Cross Cut Tester (11 x 1mm) | ○           |

**Classification of Cross Hatch Test Results**

| Surface   | Typical description of result  | ISO | ASTM |
|---|--|-----|------|
|  | The edges of the cuts are completely smooth, none of the squares of the lattice is detached.   | 0   | 5B   |
|  | Detachment of small flakes of the coating at the intersections of the cuts. A cross cut area not significantly greater than 5%, is affected.   | 1   | 4B   |
|  | The coating has flaked along the edges and/or at the intersections of the cuts. A cross cut area significantly greater than 5%, but not significantly greater than 15%, is affected.   | 2   | 3B   |
|  | The coating has flaked along the edges of the cuts partly or wholly in large ribbons, and/or it has flaked partly or wholly on different parts of the squares. A cross cut area significantly greater than 15%, but not significantly greater than 35%, is affected. | 3   | 2B   |
|  | The coating has flaked along the edges of the cuts in large ribbons and/or some squares have detached partly or wholly. A cross cut area significantly greater than 35%, but not significantly greater than 65%, is affected.  | 4   | 1B   |
|  | Any degree of flaking that cannot be classified even by classification 4 (1B).   | 5   | 0B   |

Images and descriptions based on information published in ISO2409 and ASTM D 3559-B

○ Optional Calibration Certificate available.









# Pinhole & Porosity

|                              |      |
|------------------------------|------|
| Pinhole Detection            | 9-6  |
| Pulsed DC Holiday Detection  | 9-10 |
| Continuous Holiday Detection | 9-16 |
| Accessories and Electrodes   | 9-24 |





**Premature corrosion of a substrate is usually due to a coating failure.  
A major cause is the presence of flaws in the finished coating.**

Collectively referred to as porosity, the main types of flaws are:

**Runs & Sags:** coatings move under gravity leaving a thin dry film.

**Cissing:** when a coating does not re-flow to cover the voids generated by air bubbles being released from the surface of a coating.

**Cratering:** if the substrate is wet or the coating has poor flow characteristics, voids are created in the coating.

**Pinholes:** caused by air entrapment which is then released from the surface, or by the entrapment of particulates (dust, sand, etc.) which do not stay in place.

**Over Coating:** if too much coating is applied, as it cures internal stresses of the coating can cause it to crack.

**Under Coating:** uncoated areas, or where the coating flows away from edges or corners of a substrate or welds. Insufficient coating over a rough surface profile may also leave the peaks of the profile exposed.

There are essentially three flaw detection methods in our range:

**Wet Sponge Technique/Pinhole Detector:** a low voltage is applied to a moist sponge. When the sponge moves over a coating flaw, liquid penetrates to the substrate and completes an electrical circuit, setting off the alarm. The wet sponge technique is suitable for measuring insulating coatings less than 500µm (20mils) on conductive substrates and is ideal for powder coatings and other coatings where the user does not wish to damage the coating.

**High Voltage Technique:** the high voltage, or porosity technique, can be used to test coatings up to 25mm (1") thick and is ideal for inspecting pipelines and other protective coatings. Coatings on concrete can also be tested using this method.

A power supply generates a high voltage DC or pulsed DC to a probe. As the probe passes over a flaw, a spark at the contact point sets off the alarm. This technique is suitable for locating the types of flaws described above, although care is required on thin coatings.

**UV Pinhole Detection:** UV light can be used as a low cost, quick method of detecting pinholes in coatings. A base coat containing a UV fluorescing additive is applied. When the UV flashlight shines on the coating, areas where the base coat is not covered fluoresce, identifying the location of the pinhole.

# Choose the correct gauge for your pinhole and porosity test

## Pinhole Detection

- When a low voltage is applied to a moist sponge as it moves over a coating flaw, liquid penetrates to the substrate, completing the electrical circuit and sets off an alarm
- Ideal for measuring insulating coatings less than 500µm (20mils) on conductive substrates



## Pulsed DC Holiday Detection

- Pulsed DC is a high voltage method where the energy is contained in very short pulses
- The break in energy stops the coating from building up a charge on its surface
- Ideal for testing on damp, dirty or slightly conductive coatings



## Continuous Holiday Detection

- Continuous DC is a high voltage method where the current delivered to the coating is constant
- Ideal for testing insulation coatings on conductive substrates up to 7.5mm (300mils) thick



## UV Pinhole Detection

- Low cost method of detecting pinholes in coatings
- A base coat containing a UV fluorescent additive is applied under a coating
- When a UV torchlight shines on the coating, pinholes fluoresce under the light









# Pinhole & Porosity

|                              |      |
|------------------------------|------|
| Pinhole Detection            | 9-6  |
| Pulsed DC Holiday Detection  | 9-10 |
| Continuous Holiday Detection | 9-16 |
| Accessories and Electrodes   | 9-24 |



### Elcometer 270

### Pinhole Detector

The **Elcometer 270** sets the standard for wet sponge, high quality, low voltage detectors which are supplied with a wide range of accessories to meet your requirements.



A wide range of wand accessories available

Visual and audible alarms indicate a pinhole

User selectable voltages: 9V, 67.5V or 90V

Easy release, snag proof cables - available in 4m (13'2") & 10m (32'10") lengths

Automatic internal voltage check ensures that the selected voltage can be achieved

Each unit can be converted into a separate wand with a base unit using the separate wand adaptor

**etv** video available  
elcometer.tv

#### STANDARDS:

AS 3894.2, ASTM D 5162-A, ASTM G6, ASTM G62-A, BS 7793-2, ISO 8289-A, ISO 14654, JIS K 6766, NACE RP 0188, NACE SP 0188, NACE TM0384



## Elcometer 270

## Pinhole Detector

## Accessories

**Standard wand**

A universal flat sponge to suit almost all applications

**Spare flat sponge set  
Pack of 3 sponges;**

150 x 60 x 25mm (6 x 2.3 x 1")

T27016867

T27018050

**Roller sponge wand**

Ideal for large flat surface inspection

**Spare roller sponge**

T27016960

T27018051

**Telescopic wand adaptor**

with belt clip - extends to 1m(39"), ideal for floors or high areas

**Separate wand adaptor**

with belt clip - converts the gauge into a separate pinhole detector

T27016998

T27016999

**Extension piece**

420mm (16.5") extensions to expand operators reach. Additional extension pieces can be connected to each other

T27016965

**Pinhole Inspector's Kit**

The complete pinhole detection kit.

Each kit is supplied with:

- 1 x separate wand handle & lead
  - 1 x roller wand
  - 1 x 10m (32') signal return cable
  - 2 x extension pieces
  - 1 x telescopic extension
  - 1 x belt clip
  - 1 x bottle of wetting agent
  - 3 x AA batteries
  - 1 x spare flat sponge
  - 1 x spare roller sponge
- The kit does not include the main instrument; just add the model number to the order

T27018191

**Return cable - 4m (13')**

supplied as standard, complete with crocodile clip and connection plug

T99916954

**Return cable - 10m (32')**

supplied on a drum, complete with clip and connection plug

T99916996

**Wetting agent**

50ml (1.7floz) bottle - helps aid the fast detection of pinholes. Just add to the water used to dampen the sponge

T27018024

## Technical Specification

| Model                         | Elcometer 270/3  | Elcometer 270/4  | Certificate |
|-------------------------------|--|--|-------------|
| Part Number                   | D270----3  | D270----4  |             |
| Part Number with Certificate  | D270----3C   | D270----4C   | ●           |
| Voltage                       | 9V and 90V   | 9V, 67.5V and 90V  |             |
| Coating Range (Max)           | 500µm (20mils)   | 500µm (20mils)   |             |
| Sensitivity                   | 9V: 90kΩ ±5%<br>90V: 400kΩ ±5%   | 9V: 90kΩ ±5%<br>67.5V: 125kΩ ±5%<br>90V: 400kΩ ±5%                   |             |
| Battery Life (continuous use) | 9V: up to 200 hours<br>90V: up to 80 hours   | 9V: up to 200 hours<br>67.5V: up to 100 hours<br>90V: up to 80 hours |             |
| Battery Type                  | 3 x AA batteries<br>(rechargeable batteries can also be used, but battery life will be reduced by up to 75%)                                       |  |             |
| Accuracy of Setting           | ±5%  |  |             |
| Dimensions                    | Without wand 210 x 42 x 37mm (8.3 x 1.7 x 1.5")<br>Standard wand 175mm (6.9") long (including sponge)  |  |             |
| Weight                        | 610g (21oz) including wand, cable and batteries  |  |             |
| Packing List                  | Pinhole Detector, standard wand and flat sponge, 4m (13' 2") return lead with crocodile clip, 3 x AA (LR1600) batteries and operating instructions |  |             |

● Calibration Certificate supplied as standard.







# Pinhole & Porosity

Pinhole Detection

9-6

Pulsed DC Holiday Detection

9-10

Continuous Holiday Detection

9-16

Accessories and Electrodes

9-24



**Elcometer 280**

**Pulsed DC Holiday Detector**

The **Elcometer 280** is a 'stick type' holiday detector which has been designed to make pulsed DC high voltage holiday detection safer, easier and more reliable than ever before.

Ideal for testing clean, damp, dirty or slightly conductive coatings

Flashing display, bright LED and a user adjustable volume alarm indicates detection of a holiday

0.5 - 35kV range (user selectable) for detecting porosity in coatings up to 25mm (1") thick

Safety trigger integrated inside the handle cuts power if released

Voltage calculator automatically sets the correct voltage from your coating thickness value


Internal jeep tester ensures that the selected voltage equals the test voltage

etv video available  
elcometer.tv

**STANDARDS:**

AS 3894.1, ANSI/AWWA C203, ANSI/AWWA C214, ASTM D4787, ASTM D5162, ISO 2746, ISO 29601, JIS G 3491, JIS G 3492, NACE RP0274, NACE SP0188, NACE SP0490, NACE TM0186, NACE TM0384

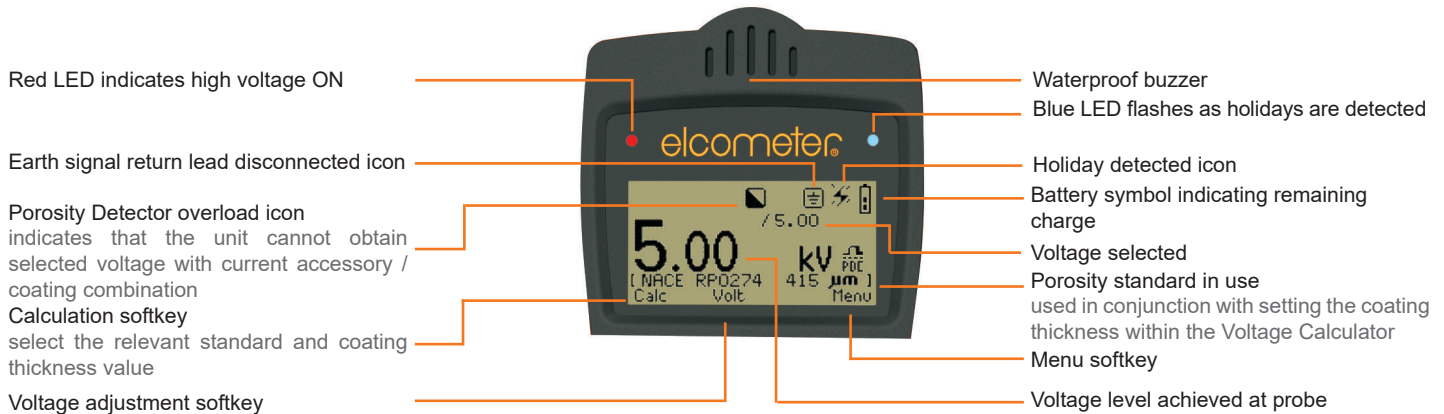

**Elcometer 280****Pulsed DC Holiday Detector**

\* the battery life is dependant on selected voltage and load applied - see Technical Specification for more information

## Elcometer 280

## Pulsed DC Holiday Detector

### Powerful

The high voltage pulsed DC technique is used to detect holidays in coatings - even if the coating is damp, dirty or slightly conductive.

### Safe

Featuring a two stage safety switch, bright LED's and screen icons which signify when the high voltage is on. It is designed with extended ribbing to protect the user from spark creep.

### User Friendly


Balanced, ergonomic design, complete with shoulder strap allows long periods of continuous use.

### Versatile

Using the wide range of probe accessories, users can detect porosity/holidays in coatings up to 25mm (1") thick.

### Tough

Rugged, shockproof and water resistant, each unit is designed for use even in the harshest of environments.

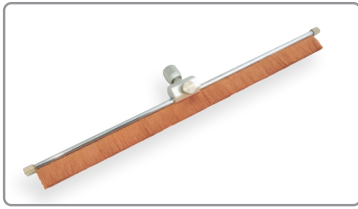

Right angled wire brush probe




Internal circular wire pipe brush probe




Band brush probes



External 'C-type' wire brush

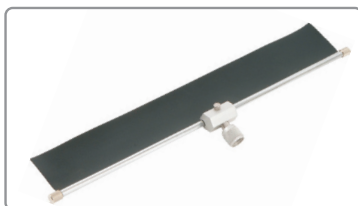

Right angled rubber probe

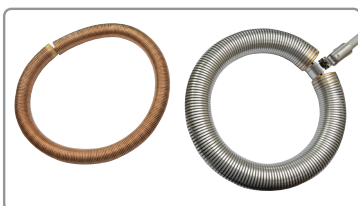

Rolling Springs





**Elcometer 280****Pulsed DC Holiday Detector****Technical Specification**

| Description   | Model S  | Model T    | Certificate |
|---|--|------------|-------------|
| Elcometer 280 Pulsed DC Holiday Detector Inspection Kit | D280-S-KIT   | D280-T-KIT | ○           |
| Elcometer 280 Pulsed DC Holiday Detector                | D280-S----   | D280-T---- | ○           |
| Rugged, Shockproof & Water Resistant                    | ■  | ■          |             |
| Integrated Safety Trigger Switch                        | ■  | ■          |             |
| Quick Release Battery Pack                              | ■  | ■          |             |
| Internal Jeep Tester                                    | ■  | ■          |             |
| Integrated Voltage Calculator                           |  | ■          |             |
| Pulsed DC High Voltage Range                            | 0.5kV - 35kV   |            |             |
| Voltage Adjustment                                      | User adjustable: 0.5 - 1kV: 10 Volt steps, 1 - 35kV: 100V steps  |            |             |
| High Voltage Output Accuracy                            | ±5% or ±50V below 1000 Volts   |            |             |
| Pulse Repetition Rate                                   | ~30Hz  |            |             |
| Operating Temperature                                   | 0°C to 50°C (32°F to 120°F)  |            |             |
| Power Supply  | Rechargeable Battery pack; battery fully charged within 4 hours  |            |             |
| Typical Battery Life                                    | Battery life is dependent upon selected voltage and load applied;<br>12" (DN305) Rolling Spring: 30 hours at 10kV; 12 hours at 35kV<br>40" (DN1016) Rolling Spring: 22 hours at 10kV; 8 hours at 35kV  |            |             |
| Instrument Case Dimensions                              | PC ABS case; (l x w x h): 603 x 219 x 193mm (23.7 x 8.6 x 7.6")  |            |             |
| Weight (no probes attached)                             | 3.0kg (6.6lb) - including battery pack   |            |             |
| Packing List  | <b>Elcometer 280 Pulsed DC Holiday Detector</b><br>Gauge ( Model S or T), 5m (16') trailing signal return lead, battery pack, battery charger with UK, EUR, US and AUS plugs, shoulder strap and operating instructions<br><b>Elcometer 280 Pulsed DC Holiday Detector Inspection Kit</b><br>Gauge (Model S or T), 5m (16') trailing signal return lead, battery pack (2 supplied with Model T), battery charger with UK, EUR, US and AUS plugs, stainless steel rolling spring holder (supplied with Model T only), 250mm (9.8") probe extension shaft, shoulder strap and operating instructions - packed in a light weight, rugged, wheeled transit case - ideal for transportation |            |             |

**Accessories**

|   |             |
|---|-------------|
| Lightweight, rugged, wheeled transit case - ideal for gauge transportation, with additional space to house up to 20m (66') of phosphor bronze or 6m (30') of stainless steel rolling spring                     | T28022769   |
| Grounding mats are ideal for testing on ungrounded pipes. The conductive rubber mat is wrapped around the coated pipe and connected to both the grounding pin (supplied separately) and the signal return lead. |             |
| 750mm (29.5") long - for pipe diameters up to 9" (NPS)/ 229mm (DN)  | T28022637-1 |
| 1500mm (59") long - for pipe diameters up to 18" (NPS)/ 457mm (DN)  | T28022637-2 |
| 2500mm (98.5") long - for pipe diameters up to 30" (NPS)/ 762mm (DN)  | T28022637-3 |
| 3500mm (137.5") long - for pipe diameters up to 42" (NPS)/ 1067mm (DN)  | T28022637-4 |
| Grounding pin; 60cm (23.5") long x 0.2cm (0.75") diameter   | T28022748   |
| Trailing signal return lead, 5m (16')   | T28022622   |
| 10m (32') earth lead, clips each end (for use with the grounding mat)   | T28022749   |
| 10m (32') earth lead, clip / Elcometer 280 connector (for use with the grounding mat)   | T28022750   |

**For a full range of rolling springs, rubber or wire brush probes and other accessories see page 9-24**



○ Optional Calibration Certificate available.







# Pinhole & Porosity

|                              |      |
|------------------------------|------|
| Pinhole Detectors            | 9-6  |
| Pulsed DC Holiday Detection  | 9-10 |
| Continuous Holiday Detection | 9-16 |
| Accessories and Electrodes   | 9-24 |



### Elcometer 266

### Holiday Detector

The **Elcometer 266** revolutionises High Voltage DC testing of coatings porosity detection making it safer, easier and more reliable than ever before.

A wide range of probe brushes and rolling springs available

Visual and audible alarms, Bright LEDs on the handle, as well as a loud buzzer, clearly indicate when a holiday is detected

Adjustable Voltage:  
0.5kV - 1kV in 50V steps  
1kV - 30kV in 100V steps

To change maximum voltage range, select a different handle; 5kV, 15kV or 30kV DC or 30kV DC continuous

Dual safety switch on handle to avoid accidental switch on (grey/orange probe handles only)

Internal Voltmeter/Jeep tester ensures that the test voltage equals the selected voltage

#### STANDARDS:


ANSI/AWWA C213, AS 3894.1, ASTM C 536, ASTM C 537, ASTM D 4787, ASTM D 5162-B, ASTM G 62-B, BS1344-11, DIN 55670, EN 14430, ISO 2746, ISO 29601, JIS K 6766, NACE RP0274, NACE RP0188, NACE RP0190, NACE RP0490, NACE SP0188, NACE SP0490

**2 YEAR\***  
WARRANTY

**etv** video available  
elcometer.tv

\* The Elcometer 266 main instrument and the Elcometer 266 probe handles are supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

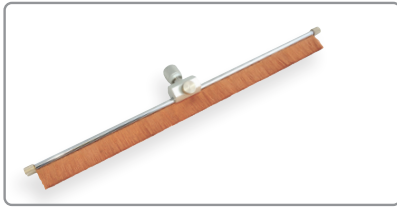

**Elcometer 266****Holiday Detector**

Right angled wire brush probe



Internal circular wire pipe brush probe




Band brush probes



External 'C-type' wire brush



Right angled rubber probe

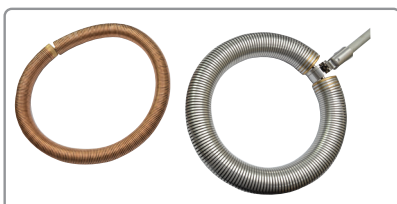

Rolling Springs

**Powerful**

The Elcometer 266 can be used to test porosity on coatings up to 7.5mm (300mils) thick and is ideal for inspecting coatings on pipelines and other protective coatings.

**Safe**

Featuring a dual safety switch on the handle to avoid accidental switch on and specialised ribbing provides superior protection.

**User Friendly**

The voltage calculator automatically sets the correct voltage from your coating thickness value. No need to use look up tables.

**Versatile**

To change maximum voltage range, select a different handle; 5kV, 15kV or 30kV DC or 30kV DC continuous.

**Easy to Use**

Bright LEDs on the handle, as well as a loud audible alarm, clearly indicates if the gauge is on (Red) and when a spark is detected (Blue).

## Elcometer 266

## Holiday Detector



### Interchangeable DC probe handles\*

| Part Number | Description        |
|-------------|--------------------|
| T26620033-1 | DC5 (0.5 - 5kV)    |
| T26620033-2 | DC15 (0.5 - 15kV)  |
| T26620033-3 | DC30 (0.5 - 30kV)  |
| T26620033-4 | DC30S (0.5 - 30kV) |



### Integrated voltage calculator

Enter the test standard & the coating thickness then the gauge will automatically programme the correct voltage



### Testing has never been safer

Ribbing provides additional user protection - specifically designed to meet EN 61010



### Second hand grip is available

Ideal for testing pipes and tank floors with 2 hands - without compromising safety

| Part Number | Description      |
|-------------|------------------|
| T26620081   | Second Hand Grip |



### Removable, quick charge batteries

Fully charge the battery pack in 4 hours, within the gauge or separately, for up to 40 hours of continuous testing

| Part Number | Description                           |
|-------------|---------------------------------------|
| T99923482   | Rechargeable lithium ion battery pack |



### Universal probe adaptors

Enables the Elcometer 266 to work with all major holiday detector's accessories.

## Technical Specification

| Description                               | Part Number  | Certificate |
|---|--|-------------|
| Elcometer 266*                            | D266-----4   | ○           |
| High Voltage Output Accuracy              | ±5% or ±50V below 1000 Volts   |             |
| Operating Temperature                     | 0°C to 50°C (32°F to 120°F)  |             |
| Power Supply                              | Rechargeable Battery Pack; battery fully charged within 4 hours  |             |
| Measured Current Flow Accuracy            | ±5% of full scale ; 0 - 100µA maximum Output Current   |             |
| Typical Battery Life - Backlight Off (On) | DC5: 40 (20) hours DC15: 20 (15) hours DC30: 10 (8) hours  |             |
| Instrument Case Dimensions                | Waterproof, ABS case; 520 x 370 x 125mm (20.5 x 14.5 x 5")   |             |
| Weight                                    | Base unit (including battery pack): 1.2kg (2.7lb) Handle: 0.6kg (1.3lb)  |             |
| Packing List                              | Elcometer 266 DC Holiday Detector, battery pack, curly connection cable for high voltage handle, 10m (32') signal return lead, battery charger with UK, EUR, US and AUS plugs, band brush, shoulder strap, tough plastic carry case and operating instructions |             |

## Probe Handles\*

The Elcometer 266 does not include the probe handle; please select the required handle from the list below.

| Part Number  | Description   | Voltage Range      | Certificate |
|--------------|---|--------------------|-------------|
| T26620033-1  | Elcometer 266 Probe Handle Voltage                        | DC5 (0.5 - 5kV)    | ○           |
| T26620033-1C | Elcometer 266 Probe Handle Certified                      | DC5 (0.5 - 5kV)    |             |
| T26620033-2  | Elcometer 266 Probe Handle Voltage                        | DC15 (0.5 - 15kV)  | ○           |
| T26620033-2C | Elcometer 266 Probe Handle Certified                      | DC15 (0.5 - 15kV)  |             |
| T26620033-3  | Elcometer 266 Probe Handle Voltage                        | DC30 (0.5 - 30kV)  | ○           |
| T26620033-3C | Elcometer 266 Probe Handle Certified                      | DC30 (0.5 - 30kV)  |             |
| T26620033-4  | Elcometer 266 Probe Handle Voltage (Continuous Voltage)   | DC30S (0.5 - 30kV) | ○           |
| T26620033-4C | Elcometer 266 Probe Handle Certified (Continuous Voltage) | DC30S (0.5 - 30kV) |             |
| T26620081    | Second Hand Grip  |                    |             |

\* The Elcometer 266 main instrument and the Elcometer 266 probe handles are supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via [www.elcometer.com](http://www.elcometer.com).

○ Optional Calibration Certificate available.



**Elcometer 236****Holiday Detector**

The **Elcometer 236** Holiday Detector provides high voltage porosity testing to detect pits, flaws, holes, etc., in a wide variety of non-metallic coatings.

Standard and telescopic handles available for hard to reach areas

Available in 2 versions; 15 and 30kV; fully adjustable in 100 Volt steps

Integrated neon bulb in the handle, together with buzzer indicate when a holiday has been located

A wide range of probe brushes and springs available

etv video available  
elcometer.tv

**STANDARDS:**

ANSI/AWWA C213, AS 3894.1,  
ASTM C 536, ASTM C 537,  
ASTM D 4787, ASTM D 5162-B,  
ASTM G 62-B, BS1344-11,  
DIN 55670, EN 14430, ISO 2746,  
ISO 29601, JIS K 6766,  
NACE RP0274, NACE RP0188,  
NACE RP0190, NACE RP0490,  
NACE SP0188, NACE SP0490



## Elcometer 236

## Holiday Detector



The Elcometer 236 provides the user with complete control of voltage and sensitivity settings and is available in 2 versions, 15kV and 30kV.

Each unit is supplied in a convenient carry case which also holds the probe handle and an additional (optional) external rechargeable battery pack which doubles the testing time available.

Due to its unique design, the probe handle can be replaced with a telescopic probe handle - extending the measurement reach up to almost 4m (13'), ideal for testing on large/high structures.

### Technical Specification

|                              | Elcometer 236 15kV   | Elcometer 236 30kV       | Certificate |
|------------------------------|--|--------------------------|-------------|
| Part Number                  | D236--15KV   | D236--30KV               | ○           |
| Part Number with Certificate | D236--15KVC  | D236--30KVC              | ●           |
| Voltage Output               | 0.5 - 15kV in 100V steps   | 0.5 - 30kV in 100V steps |             |
| Display Resolution           | 0.01kV   | 0.1kV                    |             |
| Approximate Thickness Range  | 0 - 3.75mm (0 - 150mils)   | 0 - 7.5mm (0 - 300mils)  |             |
| Alarms                       | Audible & Visual   |                          |             |
| Operating Temperature        | 0°C to 50°C (32°F to 120°F)  |                          |             |
| Power Supply                 | 12V internal rechargeable battery  |                          |             |
| Battery Life (approximate)   | 10/12 hours continuous use, 20/24 hours with the optional external battery pack  |                          |             |
| Dimensions                   | 200 x 170 x 70mm (6 x 7 x 3")  |                          |             |
| Weight                       | 2.8kg (6lb 3oz)  |                          |             |
| Packing List                 | Elcometer 236, probe handle and lead, band brush probe, 2m (79") & 10m (394") signal return/earth leads, battery charger with 3 mains cables (UK, EUR and US), carry case, transit case and operating instructions |                          |             |

### Accessories

|             |  |
|-------------|--|
| T23622790-1 | Telescopic probe handle, 600 - 1200mm (24 - 47")                           |
| T23622790-2 | Telescopic probe handle, 1800 - 3600mm (71 - 142")                         |
| T236139031  | 2m (6.5') earth signal return lead   |
| T236139032  | 10m (32') earth signal return lead   |
| T23615550   | Additional external battery pack (doubles operational use between charges) |



**For a full range of rolling springs, rubber or wire brush probes and other accessories see page 9-24**

● Calibration Certificate supplied as standard.

○ Optional Calibration Certificate available.



## Elcometer 260

## UV Pinhole Flashlight



**STANDARDS:**  
ASTM E2501

The Elcometer 260 UV Pinhole Flashlight is battery powered and housed in a rugged aluminium case providing a quick, low cost method of testing coatings for pinholes.

Featuring a 3-Watt purple light emitting diode, the Elcometer 260 UV flashlight has a beam wavelength of 405nm ( $\pm 5$ nm), which the human eye perceives as a purple light.

Designed with a specialised diffuser lens that emits a smooth beam image (with no streaks, hot spots or dark spots) and used with National Surface Treatment Centre approved safety glasses for improved contrast, the Elcometer 260 UV flashlight provides optimum integrity and reliability of the visual inspection.

The Elcometer 260 UV flashlight can detect pinholes from both the base and top coats. A UV reflective additive is applied to the base coat. When inspecting the fluorescent base coat look for black spots or grey areas that indicate pinholes. When inspecting the non-fluorescent topcoat, look for glowing spots that indicate pinholes in the topcoat (shining through from the base coat).

- Low cost and easy to use: Use UV reflecting base coat and shine the purple light on to the surface. Any fluorescence identifies pinholes
- Rugged: Manufactured from aluminium alloy and O'ring sealed to protect it from moisture and dust
- Portable and secure: Battery powered and features a recessed click-on/push off button to prevent accidental activation during transport or storage



### Technical Specification

|                   |  |
|-------------------|--|
| Part Number       | D260----2  |
| Lens Type         | Dual element diffuser  |
| Power Output      | 3 Watt   |
| Beam Wavelength   | 405nm $\pm 5$ nm   |
| Flashlight Casing | Hard anodised aluminium  |
| Battery Type      | 2 x CR123A batteries   |
| Battery Life      | 6 hours (continuous use)   |
| Dimensions        | 150 x 35mm (6 x 1.4")  |
| Weight            | 173g (6.1oz)   |
| Packing List      | Elcometer 260 UV Pinhole Flashlight, UV protective glasses, nylon belt holster, 2 x CR123A batteries, operating instructions |

### Accessories

|           |                                |
|-----------|--------------------------------|
| T26020140 | UV Protective Glasses          |
| T26020141 | 2 x Replacement 123A batteries |







# Pinhole & Porosity

Pinhole Detectors

9-6

Pulsed DC Holiday Detection

9-10

Continuous Holiday Detection

9-16

Accessories and Electrodes

9-24



## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

Wire Brush Probes, flat brush, internal and external pipe brush probes

| Part Number  | Description                             |          |       | Compatible with                     |                                     |                                     |
|--------------|---|----------|-------|-------------------------------------|-------------------------------------|-------------------------------------|
|              |   |          |       | Elcometer 236                       | Elcometer 266                       | Elcometer 280                       |
|              |   | Width    |       |                                     |                                     |                                     |
| T99920022-1  | Right angled wire brush probe           | 0.25m    | 9.8"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920022-2  | Right angled wire brush probe           | 0.50m    | 19.7" | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920022-3  | Right angled wire brush probe           | 1.00m    | 39"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926621    | Spare wire brush electrode              | 0.25m    | 9.8"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926622    | Spare wire brush electrode              | 0.50m    | 19.7" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926623    | Spare wire brush electrode              | 1.00m    | 39"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|              |   | Diameter |       |                                     |                                     |                                     |
| T99920071-1  | Internal circular wire pipe brush probe | 38mm     | 1.5"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-2  | Internal circular wire pipe brush probe | 51mm     | 2.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-3  | Internal circular wire pipe brush probe | 64mm     | 2.5"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-4  | Internal circular wire pipe brush probe | 76mm     | 3.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-5  | Internal circular wire pipe brush probe | 89mm     | 3.5"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-6  | Internal circular wire pipe brush probe | 102mm    | 4.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-7  | Internal circular wire pipe brush probe | 114mm    | 4.5"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-8  | Internal circular wire pipe brush probe | 127mm    | 5.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-9  | Internal circular wire pipe brush probe | 152mm    | 6.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-10 | Internal circular wire pipe brush probe | 203mm    | 8.0"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-11 | Internal circular wire pipe brush probe | 254mm    | 10"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-12 | Internal circular wire pipe brush probe | 305mm    | 12"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-13 | Internal circular wire pipe brush probe | 356mm    | 14"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-14 | Internal circular wire pipe brush probe | 406mm    | 16"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-15 | Internal circular wire pipe brush probe | 508mm    | 20"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920071-16 | Internal circular wire pipe brush probe | 610mm    | 24"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993766-    | Spare circular wire brush electrode     | 38mm     | 1.5"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993767-    | Spare circular wire brush electrode     | 51mm     | 2.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993768-    | Spare circular wire brush electrode     | 64mm     | 2.5"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993769-    | Spare circular wire brush electrode     | 76mm     | 3.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993770-    | Spare circular wire brush electrode     | 89mm     | 3.5"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993771-    | Spare circular wire brush electrode     | 102mm    | 4.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993772-    | Spare circular wire brush electrode     | 114mm    | 4.5"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993773-    | Spare circular wire brush electrode     | 127mm    | 5.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993774-    | Spare circular wire brush electrode     | 152mm    | 6.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993775-    | Spare circular wire brush electrode     | 203mm    | 8.0"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993776-    | Spare circular wire brush electrode     | 254mm    | 10"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993777-    | Spare circular wire brush electrode     | 305mm    | 12"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993778-    | Spare circular wire brush electrode     | 356mm    | 14"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993779-    | Spare circular wire brush electrode     | 406mm    | 16"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993780-    | Spare circular wire brush electrode     | 508mm    | 20"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T9993781-    | Spare circular wire brush electrode     | 610mm    | 24"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

☐ Older Elcometer 236 models may require adaptor piece T99922768



## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

Wire Brush Probes, band brush, flat brush, internal and external pipe brush probes



| Part Number | Description   | Compatible with          |                                     |                                     |
|-------------|---|--------------------------|-------------------------------------|-------------------------------------|
|             |   | Elcometer 236            | Elcometer 266                       | Elcometer 280                       |
| T99922752   | 'C-type' wire brush holder <sup>1</sup><br>(order C-type brush from the list below) | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922907   | 'C-type' wire brush support handle <sup>2</sup>                                     | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |



|              |                              | Outside Diameter (OD) |          |                                     |                                     |                                     |
|--------------|------------------------------|-----------------------|----------|-------------------------------------|-------------------------------------|-------------------------------------|
|              |                              | DN                    | NPS      |                                     |                                     |                                     |
| T99922745-1  | External 'C-type' wire brush | 150 - 250mm           | 6 - 9"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-2  | External 'C-type' wire brush | 250 - 350mm           | 9 - 12"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-3  | External 'C-type' wire brush | 350 - 450mm           | 12 - 16" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-4  | External 'C-type' wire brush | 450 - 550mm           | 16 - 20" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-5  | External 'C-type' wire brush | 550 - 650mm           | 20 - 24" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-6  | External 'C-type' wire brush | 650 - 750mm           | 24 - 28" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-7  | External 'C-type' wire brush | 750 - 850mm           | 28 - 32" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-8  | External 'C-type' wire brush | 850 - 950mm           | 32 - 36" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-9  | External 'C-type' wire brush | 950 - 1050mm          | 36 - 40" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922745-10 | External 'C-type' wire brush | 1050 - 1150mm         | 40 - 44" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

<sup>1</sup> Wire brush supplied separately

<sup>2</sup> Wire brush support handle ideal for two handed use or second person for large diameters

Conductive Rubber Probes



|              |                           | Width  |       |                                     |                                     |                                     |
|--------------|---------------------------|--------|-------|-------------------------------------|-------------------------------------|-------------------------------------|
|              |                           |        |       |                                     |                                     |                                     |
| T99920022-11 | Right angled rubber probe | 250mm  | 9.8"  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920022-12 | Right angled rubber probe | 500mm  | 19.7" | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920022-13 | Right angled rubber probe | 1000mm | 39"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99920022-14 | Right angled rubber probe | 1400mm | 55"   | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926731    | Spare rubber electrode    | 250mm  | 9.8"  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926732    | Spare rubber electrode    | 500mm  | 19.7" | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926733    | Spare rubber electrode    | 1000mm | 39"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99926734    | Spare rubber electrode    | 1400mm | 55"   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Band brush probes



|           |                             |                          |                                     |                                     |
|-----------|-----------------------------|--------------------------|-------------------------------------|-------------------------------------|
| T99919975 | Band brush probe            | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922751 | Phosphor bronze brush probe | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |


☐ Older Elcometer 236 models may require adaptor piece T99922768

## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

Rolling Springs Available in phosphor bronze or stainless steel

Each spring is supplied with an easy-release coupling piece, allowing users to quickly connect and disconnect the rolling spring from stanchions, pillars, etc.

Please note that rolling springs are not supplied with a spring holder. Please order the appropriate rolling spring holder separately.

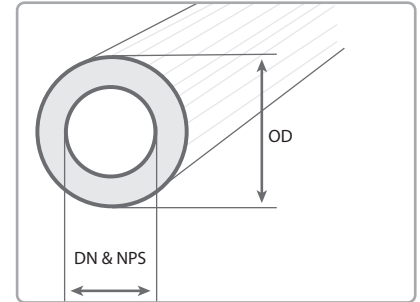

Rolling springs are available in 2 versions, phosphor bronze round spring and 304 stainless steel box section spring. The 19mm (0.75") diameter phosphor bronze springs are almost 3 times lighter than the 34mm (1.33") diameter stainless steel springs.

### Rolling Spring Dimensions

|                 |                 | Nominal Pipe Size |          | Pipe Outside Diameter (OD) |        |            |        |
|-----------------|-----------------|-------------------|----------|----------------------------|--------|------------|--------|
| Part Number     |                 | DN                | NPS      | millimetres (mm)           |        | inches (") |        |
| Phosphor Bronze | Stainless Steel | (mm)              | (inches) | min OD                     | max OD | min OD     | max OD |
| T99920438-15A   | -               | 40                | 1.5      | 48                         | 54     | 1.9        | 2.1    |
| T99920438-15B   | -               |                   |          | 54                         | 60     | 2.1        | 2.4    |
| T99920438-20A   | -               | 50                | 2.0      | 60                         | 66     | 2.4        | 2.6    |
| T99920438-20B   | -               |                   |          | 66                         | 73     | 2.6        | 2.9    |
| T99920438-25A   | T99922744-25A   | 65                | 2.5      | 73                         | 80     | 2.9        | 3.1    |
| T99920438-25B   | T99922744-25B   |                   |          | 80                         | 88     | 3.1        | 3.5    |
| T99920438-30A   | T99922744-30A   | 80                | 3.0      | 88                         | 95     | 3.5        | 3.7    |
| T99920438-30B   | T99922744-30B   |                   |          | 95                         | 100    | 3.7        | 3.9    |
| T99920438-35A   | T99922744-35A   | 90                | 3.5      | 100                        | 108    | 3.9        | 4.3    |
| T99920438-35B   | T99922744-35B   |                   |          | 108                        | 114    | 4.3        | 4.5    |
| T99920438-40A   | T99922744-40A   | 100               | 4.0      | 114                        | 125    | 4.5        | 4.9    |
| T99920438-45A   | T99922744-45A   | 114               | 4.5      | 125                        | 136    | 4.9        | 5.4    |
| T99920438-45B   | T99922744-45B   |                   |          | 136                        | 141    | 5.4        | 5.6    |
| T99920438-50A   | T99922744-50A   | 125               | 5.0      | 141                        | 155    | 5.6        | 6.1    |
| T99920438-50B   | T99922744-50B   |                   |          | 155                        | 168    | 6.1        | 6.6    |
| T99920438-60A   | T99922744-60A   | 152               | 6.0      | 168                        | 180    | 6.6        | 7.1    |
| T99920438-60B   | T99922744-60B   |                   |          | 180                        | 193    | 7.1        | 7.6    |
| T99920438-70A   | T99922744-70A   | 178               | 7.0      | 193                        | 213    | 7.6        | 8.4    |
| T99920438-70B   | T99922744-70B   |                   |          | 213                        | 219    | 8.4        | 8.6    |
| T99920438-80A   | T99922744-80A   | 203               | 8.0      | 219                        | 240    | 8.6        | 9.4    |
| T99920438-90A   | T99922744-90A   | 229               | 9.0      | 240                        | 264    | 9.4        | 10.4   |
| T99920438-100A  | T99922744-100A  | 254               | 10.0     | 264                        | 290    | 10.4       | 11.4   |
| T99920438-110A  | T99922744-110A  | 279               | 11.0     | 290                        | 320    | 11.4       | 12.6   |
| T99920438-120A  | T99922744-120A  | 305               | 12.0     | 320                        | 350    | 12.6       | 13.8   |
| T99920438-140A  | T99922744-140A  | 356               | 14.0     | 350                        | 375    | 13.8       | 14.8   |
| T99920438-140B  | T99922744-140B  |                   |          | 375                        | 400    | 14.8       | 15.7   |

□ Older Elcometer 236 models may require adaptor piece T99922768



## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

Rolling Springs Available in phosphor bronze or stainless steel



Rolling springs are available in 2 versions, phosphor bronze round spring and 304 stainless steel box section spring. The 19mm (0.75") diameter phosphor bronze springs are almost 3 times lighter than the 34mm (1.33") diameter stainless steel springs.

### Rolling Spring Dimensions

|                 |                 | Nominal Pipe Size |          | Pipe Outside Diameter (OD) |        |            |        |
|-----------------|-----------------|-------------------|----------|----------------------------|--------|------------|--------|
| Part Number     |                 | DN                | NPS      | millimetres (mm)           |        | inches (") |        |
| Phosphor Bronze | Stainless Steel | (mm)              | (inches) | min OD                     | max OD | min OD     | max OD |
| T99920438-160A  | T99922744-160A  | 406               | 16.0     | 400                        | 435    | 15.7       | 17.1   |
| T99920438-160B  | T99922744-160B  |                   |          | 435                        | 450    | 17.1       | 17.7   |
| T99920438-180A  | T99922744-180A  | 457               | 18.0     | 450                        | 500    | 17.7       | 19.7   |
| T99920438-200A  | T99922744-200A  | 508               | 20.0     | 500                        | 550    | 19.7       | 21.7   |
| T99920438-220A  | T99922744-220A  | 559               | 22.0     | 550                        | 600    | 21.7       | 23.6   |
| T99920438-240A  | T99922744-240A  | 610               | 24.0     | 600                        | 650    | 23.6       | 25.6   |
| T99920438-260A  | T99922744-260A  | 660               | 26.0     | 650                        | 700    | 25.6       | 27.6   |
| T99920438-280A  | T99922744-280A  | 711               | 28.0     | 700                        | 750    | 27.6       | 29.5   |
| T99920438-300A  | T99922744-300A  | 762               | 30.0     | 750                        | 810    | 29.5       | 31.9   |
| T99920438-320A  | T99922744-320A  | 813               | 32.0     | 810                        | 860    | 31.9       | 33.9   |
| T99920438-340A  | T99922744-340A  | 864               | 34.0     | 860                        | 910    | 33.9       | 35.8   |
| T99920438-360A  | T99922744-360A  | 914               | 36.0     | 910                        | 960    | 35.8       | 37.8   |
| T99920438-380A  | T99922744-380A  | 965               | 38.0     | 960                        | 1010   | 37.8       | 39.8   |
| T99920438-400A  | T99922744-400A  | 1016              | 40.0     | 1010                       | 1060   | 39.8       | 41.7   |
| T99920438-420A  | T99922744-420A  | 1067              | 42.0     | 1060                       | 1110   | 41.7       | 43.7   |
| T99920438-440A  | T99922744-440A  | 1118              | 44.0     | 1110                       | 1160   | 43.7       | 45.7   |
| T99920438-460A  | T99922744-460A  | 1168              | 46.0     | 1160                       | 1210   | 45.7       | 47.6   |
| T99920438-480A  | T99922744-480A  | 1219              | 48.0     | 1210                       | 1270   | 47.6       | 50.0   |
| T99920438-500A  | T99922744-500A  | 1270              | 50.0     | 1270                       | 1320   | 50.0       | 52.0   |
| T99920438-520A  | T99922744-520A  | 1321              | 52.0     | 1320                       | 1370   | 52.0       | 53.9   |
| T99920438-540A  | T99922744-540A  | 1372              | 54.0     | 1370                       | 1425   | 53.9       | 56.1   |

Other sizes are available upon request. Please contact your nearest distributor for more information.

### Rolling Springs Holders

| Part Number | Description                           | Compatible with          |                                     |                                     |
|-------------|---------------------------------------|--------------------------|-------------------------------------|-------------------------------------|
| T99920086   | Phosphor bronze rolling spring holder | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| T99922746   | Stainless steel rolling spring holder | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

☐ Older Elcometer 236 models may require adaptor piece T99922768

## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

### Batteries & Chargers



| Part Number | Description                                    | Compatible with |               |               |
|-------------|--|-----------------|---------------|---------------|
|             |  | Elcometer 236   | Elcometer 266 | Elcometer 280 |
| T23615550   | External rechargeable battery pack             | ■               |               |               |
| T23613907   | Battery charger & mains lead (UK 240V)         | ■               |               |               |
| T23613908   | Battery charger & mains lead (EU 220V)         | ■               |               |               |
| T23613909   | Battery charger & mains lead (US 110V)         | ■               |               |               |
| T99923482   | Rechargeable battery pack                      |                 | ■             | ■             |
| T99919999   | Battery Charger with UK, EUR, US and AUS plugs |                 | ■             | ■             |

### Earth Signal Return Leads



|            |  |   |   |   |
|------------|--|---|---|---|
| T236139031 | Earth signal return lead, 2m (6.5')                  | ■ |   |   |
| T236139032 | Earth signal return lead, 10m (32')                  | ■ |   |   |
| T99916954  | Earth signal return lead, 4m (13')                   |   | ■ |   |
| T99916996  | Earth signal return lead, 10m (32')                  |   | ■ |   |
| T28022750  | 10m (32') earth lead, clip / Elcometer 280 connector |   |   | ■ |
| T28022622  | Trailing signal return lead, 5m (16')                |   |   | ■ |

### Telescopic Probes, Probe Extension Rods



|             |  |   |   |   |
|-------------|--|---|---|---|
| T23622790-1 | Telescopic probe handle, 0.6 - 1.20m (24 - 47")  | □ |   |   |
| T23622790-2 | Telescopic probe handle, 1.8 - 3.60m (71 - 142") | □ |   |   |
| T99919988-3 | Probe extension rod, 250mm (9.8")                | □ | ■ | ■ |
| T99919988-1 | Probe extension rod, 500mm (20")                 | □ | ■ | ■ |
| T99919988-2 | Probe extension rod, 1000mm (39")                | □ | ■ | ■ |



□ Older Elcometer 236 models may require adaptor piece T99922768



## Elcometer 236, 266 & 280 High Voltage Holiday Detector Accessories

### Grounding Mats

Grounding mats are ideal for testing on ungrounded pipes. The conductive rubber mat is wrapped around the coated pipe and connected to both the grounding pin (supplied separately) and the signal return lead.



| Part Number | Description  | Outside Diameter (OD) |           | Compatible with |               |               |
|-------------|--|-----------------------|-----------|-----------------|---------------|---------------|
|             |  | DN                    | NPS       | Elcometer 236   | Elcometer 266 | Elcometer 280 |
| T28022637-1 | Grounding Mat  | up to 229mm           | up to 9"  |                 |               | ■             |
| T28022637-2 | Grounding Mat  | up to 457mm           | up to 18" |                 |               | ■             |
| T28022637-3 | Grounding Mat  | up to 762mm           | up to 30" |                 |               | ■             |
| T28022637-4 | Grounding Mat  | up to 1067mm          | up to 42" |                 |               | ■             |
| T28022748   | Grounding pin; 60cm (23.5") long                     |                       |           |                 |               | ■             |
| T28022749   | 10m (32') earth lead, clips each end                 |                       |           |                 |               | ■             |
| T28022750   | 10m (32') earth lead, clip / Elcometer 280 connector |                       |           |                 |               | ■             |

### Accessory Adaptors Allows other manufacturer's accessories to fit Elcometer models



|           |   |   |   |   |
|-----------|---|---|---|---|
| T99920084 | Adaptor for models: AP, APS, AP/S1, AP/S2, AP/W, 10/20, 14/20, 10, 20 & 20S | □ | ■ | ■ |
| T99920083 | Adaptor for models: P20, P40, P60, 780, 785 & 790                           | □ | ■ | ■ |
| T99920252 | Adaptor for models: PHD 1-20 & PHD 2-40                                     | □ | ■ | ■ |
| T99922747 | Adaptor for models: 4S, 4.0, 8.0, 35  | □ | ■ | ■ |
| T99920082 | Adaptor for current range to fit old accessories                            | ■ | ■ | ■ |
| T99922768 | Adaptor for Elcometer 136 and older 236 models                              | ■ |   |   |

□ Older Elcometer 236 models may require adaptor piece T99922768







# Inspector's Accessories

10



## Elcometer offers a full range of accessories specifically for the coatings inspector, these include:

**Inspection Mirrors:** it may be necessary to take a detailed look at a specific area where you cannot get to. In this case, an inspection mirror is required.

**Magnifiers & Microscopes:** for close up investigations, the inspector may require magnification of the surface for a clearer understanding.

**Torches/Flashlight:** in dark or shaded areas such as in ballast tanks or on large production sites, further investigation may require additional light.

**Publications:** inspection manuals for general coating defects or those specific to pipeline inspection.

**Pictorial Surface Standards** for blast cleaning incorporating standards for BS, ISO, SIS, and SSPC.



**Elcometer 131****Inspection Mirrors**

Ideal for inspecting difficult to access areas - inside pipes, behind corners and other inaccessible or awkward areas.

Combined with the full range of test equipment from Elcometer, these high quality, robust mirrors help to provide a detailed examination of the component or project under inspection.

**Technical Specification**

| Part Number      | Description  |
|------------------|--|
| <b>H131---1A</b> | Elcometer 131/1A Telescopic Inspection Mirror                              |
| Dimensions       | Extends from 520mm (20.5") to 1500mm (59")<br>Mirror diameter: 63mm (2.5") |
| Weight           | 650g (1.43lb)  |
| Packing List     | Elcometer 131 Inspection Mirror  |



| Part Number      | Description   |
|------------------|---|
| <b>H131---1B</b> | Elcometer 131/1B Telescopic Inspection Mirror                             |
| Dimensions       | Extends from 165mm (6.5") to 925mm (36")<br>Mirror diameter: 57mm (2.25") |
| Weight           | 100g (0.22lb)   |
| Packing List     | Elcometer 131 Inspection Mirror   |



| Part Number      | Description   |
|------------------|---|
| <b>H131---1C</b> | Elcometer 131/1C Telescopic Inspection Mirror                               |
| Dimensions       | Extends from 165mm (6.5") to 750mm (29.5")<br>Mirror diameter: 82mm (3.25") |
| Weight           | 100g (0.22lb)   |
| Packing List     | Elcometer 131 Inspection Mirror   |

### Elcometer 137

### LED Illuminated (x10) Magnifier



From time to time a closer inspection of a surface is required to ascertain the exact conditions of the material's profile, cleanliness, etc.

The Elcometer 137 LED illuminated magnifier is the ideal product for the job as many environments can be in low light or dark areas - ballast tanks, oil and gas tanks, etc.

- Lightweight, battery powered, portable magnifier
- Ideal for viewing surface comparators
- x10 magnification for close surface inspection
- Scaled lens for easy measurement of surface features

#### Technical Specification

| Part Number       | Description  |
|-------------------|--|
| <b>H137----</b> 1 | Elcometer 137 LED Illuminated Magnifier                            |
| Battery Type      | 2 x LR14 (C)   |
| Dimensions        | 33 x 215mm (1.3 x 8.5")  |
| Weight            | 236g (0.52lb)  |
| Packing List      | Elcometer 137 LED Illuminated Magnifier and operating instructions |

### Elcometer 7210

### Pocket (x30) Microscope



The Elcometer 7210 is pocket size making it an extremely practical microscope for site inspections.

Having x30 magnification and an inbuilt light source, the Elcometer 7210 Pocket Microscope is the ideal choice for close up investigation of defects and surface cleanliness.

#### Technical Specification

| Part Number         | Description   |
|---------------------|---|
| <b>KT007210M001</b> | Elcometer 7210 Pocket Microscope  |
| Battery Type        | 2 x AA batteries  |
| Dimensions          | 140 x 50 x 22mm (5.5 x 2 x 0.9")  |
| Weight              | 68g (0.14lb)  |
| Packing List        | Elcometer 7210 Pocket Microscope, 2 x AA batteries and operating instructions |



**Elcometer 900****Illuminated (x50) Microscope**

The Elcometer 900 is a very simple, graduated x50 microscope with internal illumination.

This allows the user to quickly determine the width by counting the number of graduated reticules on the scaled lens and then calculating the value.

**Technical Specification**

| Part Number        | Description   |
|--------------------|---|
| <b>W90018568-D</b> | Elcometer 900 Microscope  |
| Battery Type       | 1 x AAA battery   |
| Dimensions         | 120 x 43 x 115mm (4.7 x 1.7 x 4.5")                             |
| Weight             | 145g (0.31lb)   |
| Packing List       | Elcometer 900 Illuminated Microscope and operating instructions |

**Elcometer 132****Safety Torch / Flash Light**

The Elcometer 132 Safety Torch / Flash Light is CE marked to the ATEX directive and IECEx. Certified for safe use in Zones 1 and 2 potentially explosive gas, vapour and mist atmosphere, where a T6 or T4 class permits, and Zones 21 and 22 dust atmospheres, with certified maximum surface temperatures of 65°C or 95°C.

Many environments can have low light, dark areas or explosive gas present; ballast tanks, oil and gas tanks, etc. It is imperative for safety reasons to be able to inspect the coating adequately with sufficient light.

**Technical Specification**

| Part Number      | Description   |
|------------------|---|
| <b>H132---1A</b> | Elcometer 132 Safety Torch/Flash Light                            |
| Battery Type     | 2 x LR20 (D)  |
| Dimensions       | 200 x 60mm (7.8 x 2.4")   |
| Weight           | 150g (5.3oz) without batteries                                    |
| Packing List     | Elcometer 132 Safety Torch/Flash Light and operating instructions |

## Elcometer 144

## Paint Safe Marker Pens



Paint Safe Marker Pens are used to highlight visual areas of non conformance, providing a clear indication of areas where rework or other processes need to be carried out.

The Marker pen has been specially selected for use as an inspection marker for all types of large steel fabrications which include both coated or uncoated ships and offshore structures.


The black permanent ink marker pen is ideal for marking in the most sensitive areas.

### Technical Specification

| Part Number | Description                                      |
|-------------|--|
| H144-----1  | Elcometer 144 Paint Safe Marker Pens (pack of 5) |

## Elcometer 147

## Weld Gauge

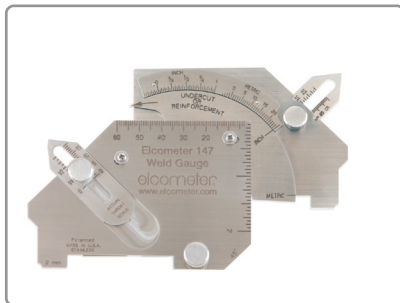

The Elcometer 147 Weld Gauge measures many aspects of welds in both Metric and Imperial:

- angle of preparation 0 to 60°
- misalignment (high - low)
- fillet weld throat size
- fillet weld length
- 2mm (0.79") edge roundness test
- excess weld metal (capping size)
- depth of undercut
- depth of pitting
- general linear measurements up to 60mm (2")

### Technical Specification

| Part Number                    | Description   |
|--------------------------------|---|
| H147-----1                     | Elcometer 147 Weld Gauge                                  |
| Angle of Preparation Scale     | 0 - 60° in 5° divisions                                   |
| Misalignment Scale             | 0 - 25mm in 1mm divisions and 0 - 1" in 1/16" divisions   |
| Fillet Leg & Excess Weld Scale | 0 - 25mm in 1mm divisions and 0 - 1" in 1/16" divisions   |
| Fillet Throat Scale            | 0 - 20mm in 1mm divisions and 0 - 3/4" in 1/16" divisions |
| Undercut Scale                 | 0 - 4mm in 1mm divisions and 0 - 1/4" in 1/16" divisions  |
| Dimensions                     | 100 x 68mm (3.9 x 2.7")                                   |
| Weight                         | 154g (5.4oz)  |
| Packing List                   | Elcometer 147 Weld Gauge and instruction card             |



For Pictorial Surface Standards see page 3-3




**Fitz****Elcometer Fitz's Atlas 2 of Coatings Defects**

The Elcometer Fitz's Atlas 2 of Coating Defects (EFA) takes the reader through a comprehensive range of problems and discusses each in detail.


EFA provides the User with a greater understanding of the defect, the probable cause and possible solutions. With in excess of 180 colour photographs, the user can quickly gain an insight into the coatings industry and the possible pitfalls.

**Sections:**

- Welding Faults: welds, cracks, surface porosity, undercut
- Surface Conditions: surface preparation, oil contamination, skip weld
- Coatings Defects: a comprehensive list of possible defects including blistering, bloom, chalking, cracking, erosion, fish eyes, orange peel
- Microscopy: blisters, bubbles, delamination, pinholes, voids, weed fouling
- Marine Fouling: animal fouling, barnacles, molluscs, weed or algae fouling

**Technical Specification**

| Part Number      | Description                                 |
|------------------|---|
| <b>H99916043</b> | Elcometer Fitz's Atlas 2 of Coating Defects |
| Dimensions       | 223 x 220 x 70mm (9 x 8.6 x 3")             |
| Weight           | 0.45kg (1lb)                                |

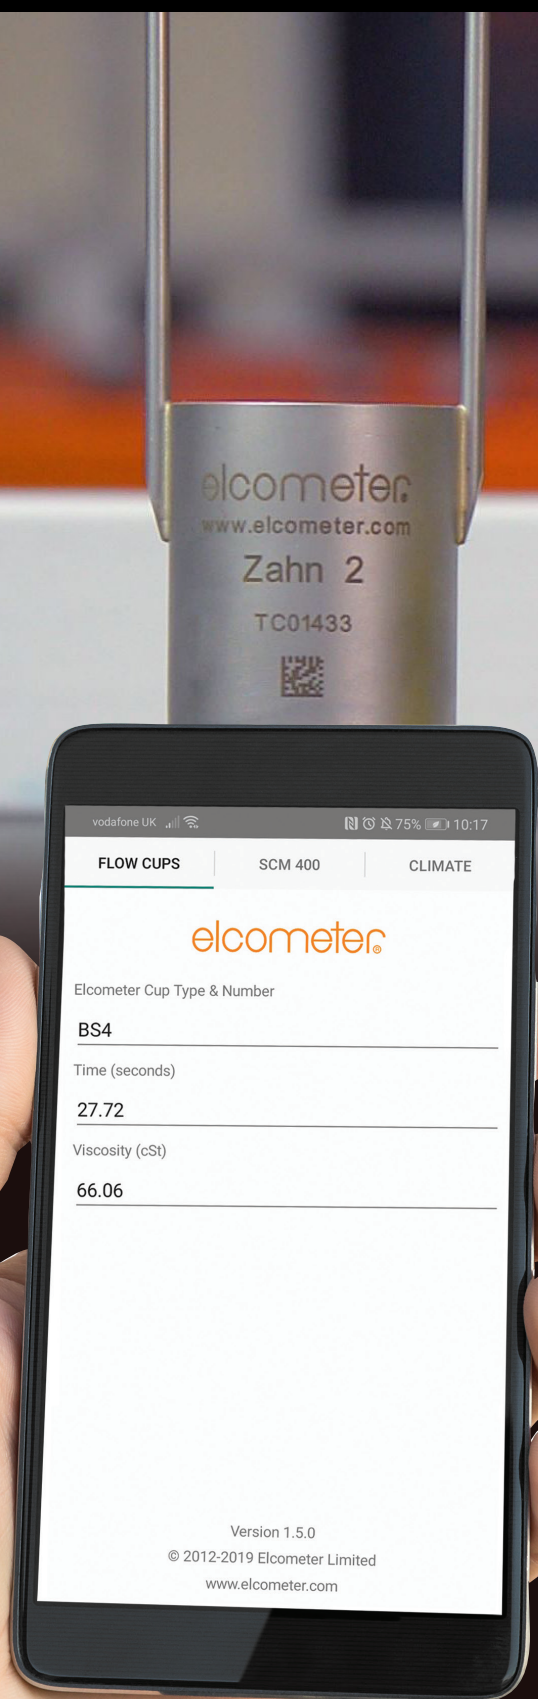


Fast and easy to use  
- **ElcoCalc™** instantly  
converts viscosity cup  
flow time in seconds  
into Centistokes (cSt).

**Free to download** from the  
Play Store and App Store for  
Android and Apple devices.



## Elcometer 2435 &amp; 2437

## Viscosity Dip Cups - Frikmar

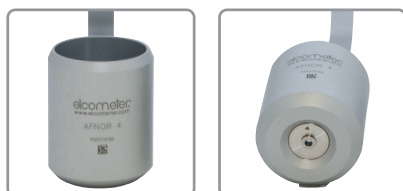

## STANDARDS:

DIN: DIN 53211 (cup 4 only)

FORD/ASTM: ASTM D 1200, D 5125

ISO: ISO 2431

AFNOR: NF T30-014

Thanks to its handle, this cup is very easy to use to perform checks on site or during the manufacturing process. It is ideal for measuring the consistency of paints, varnishes and other similar products.

Simply dip the cup into the product to be measured, lift it out and measure how long it takes for the contents to empty through the orifice.

The measured kinematic viscosity is generally expressed in seconds (s) flow time, which can be converted to Centistokes (cSt) if the Standard stipulates a conversion method.

Several ranges are available, according to the Standards being used; from 7 to 1,100cSt.



## Technical Specification

## FORD/ASTM Viscosity Dip Cups

| Part Number   | Description                                   | Orifice Diameter | Range <sup>1</sup> (cSt) | Certificate    |
|---------------|---|------------------|--------------------------|----------------|
| K0002435M001  | Elcometer 2435/1 FORD/ASTM Dip Cup 4          | 4.12mm           | 70 - 370                 | ◇              |
| K0002435M001C | Elcometer 2435/1 with calibration certificate | 4.12mm           | 70 - 370                 | ● <sup>3</sup> |

## ISO Viscosity Dip Cups

| Part Number   | Description                                   | Orifice Diameter | Range <sup>1</sup> (cSt) | Certificate    |
|---------------|---|------------------|--------------------------|----------------|
| K0002437M002  | Elcometer 2437/2 ISO Dip Cup 3                | 3mm              | 7 - 42                   | ◇              |
| K0002437M003  | Elcometer 2437/3 ISO Dip Cup 4                | 4mm              | 34 - 135                 | ◇              |
| K0002437M006  | Elcometer 2437/6 ISO Dip Cup 5                | 5mm              | 91 - 326                 | ◇              |
| K0002437M004  | Elcometer 2437/4 ISO Dip Cup 6                | 6mm              | 188 - 684                | ◇              |
| K0002437M005  | Elcometer 2437/5 ISO Dip Cup 8                | 8mm              | -                        |                |
| K0002437M002C | Elcometer 2437/2 with calibration certificate | 3mm              | 7 - 42                   | ● <sup>3</sup> |
| K0002437M003C | Elcometer 2437/3 with calibration certificate | 4mm              | 34 - 135                 | ● <sup>3</sup> |
| K0002437M006C | Elcometer 2437/6 with calibration certificate | 5mm              | 91 - 326                 | ● <sup>3</sup> |
| K0002437M004C | Elcometer 2437/4 with calibration certificate | 6mm              | 188 - 684                | ● <sup>3</sup> |
| K0002437M005C | Elcometer 2437/5 with calibration certificate | 8mm              | -                        | ● <sup>2</sup> |



For a full range of Calibration Oils see page 10-12

<sup>1</sup> For Information Only<sup>2</sup> Dimensional Certificate<sup>3</sup> Efflux Time Certificate

● Calibration Certificate supplied as standard. ◇ Batch Calibration Certificate supplied as standard.



Elcometer 2434 & 2436

Viscosity Dip Cups - Frikmar

Technical Specification

| DIN Viscosity Dip Cups |   | Orifice Diameter | Range <sup>1</sup> (cSt) | Certificate    |
|------------------------|---|------------------|--------------------------|----------------|
| Part Number            | Description                                   |                  |                          |                |
| K0002434M001           | Elcometer 2434/1 DIN Dip Cup 2                | 2mm              | -                        | ◇              |
| K0002434M002           | Elcometer 2434/2 DIN Dip Cup 4                | 4mm              | 96 - 683                 | ◇              |
| K0002434M003           | Elcometer 2434/3 DIN Dip Cup 6                | 6mm              | -                        | ◇              |
| K0002434M004           | Elcometer 2434/4 DIN Dip Cup 8                | 8mm              | -                        | ◇              |
| K0002434M001C          | Elcometer 2434/1 with calibration certificate | 2mm              | -                        | ● <sup>2</sup> |
| K0002434M002C          | Elcometer 2434/2 with calibration certificate | 4mm              | 96 - 683                 | ● <sup>3</sup> |
| K0002434M003C          | Elcometer 2434/3 with calibration certificate | 6mm              | -                        | ● <sup>2</sup> |
| K0002434M004C          | Elcometer 2434/4 with calibration certificate | 8mm              | -                        | ● <sup>2</sup> |

| AFNOR Viscosity Dip Cups |   | Orifice Diameter | Range <sup>1</sup> (cSt) | Certificate    |
|--------------------------|---|------------------|--------------------------|----------------|
| Part Number              | Description                                   |                  |                          |                |
| K0002436M001             | Elcometer 2436/1 AFNOR Dip Cup 4              | 3.99mm           | 50 - 1,100               |                |
| K0002436M001C            | Elcometer 2436/1 with calibration certificate | 3.99mm           | 50 - 1,100               | ● <sup>2</sup> |



For the full range of Viscosity Flow Cups  
visit [www.elcometer.com](http://www.elcometer.com)

**Elcometer 2210****Zahn Viscosity Dip Cups**

The Elcometer 2210 Zahn Dip Cup is a small curved cup suspended from a looped wire. This method is ideal for measuring the consistency of paints, varnishes and similar products.

Simply dip the cup into the product to be measured, lift it out and measure how long it takes for the contents to empty through the orifice.


There are five cups with five different orifice sizes available, ranging from 5 to 1,840cSt.

**STANDARDS:**

ASTM D 1084-D, ASTM D 4212

**Technical Specification**

| Part Number   | Description                                   | Orifice Diameter | Range <sup>1</sup> (cSt) | Certificate    |
|---------------|---|------------------|--------------------------|----------------|
| K0002210M001  | Elcometer 2210/1 Zahn Dip Cup 1               | 1.8mm            | 5 - 56                   | ◇              |
| K0002210M002  | Elcometer 2210/2 Zahn Dip Cup 2               | 2.7mm            | 21 - 231                 | ◇              |
| K0002210M003  | Elcometer 2210/3 Zahn Dip Cup 3               | 3.8mm            | 146 - 848                | ◇              |
| K0002210M004  | Elcometer 2210/4 Zahn Dip Cup 4               | 4.3mm            | 222 - 1,110              | ◇              |
| K0002210M005  | Elcometer 2210/5 Zahn Dip Cup 5               | 5.3mm            | 460 - 1,840              | ◇              |
| K0002210M001C | Elcometer 2210/1 with calibration certificate | 1.8mm            | 5 - 56                   | ● <sup>2</sup> |
| K0002210M002C | Elcometer 2210/2 with calibration certificate | 2.7mm            | 21 - 231                 | ● <sup>2</sup> |
| K0002210M003C | Elcometer 2210/3 with calibration certificate | 3.8mm            | 146 - 848                | ● <sup>2</sup> |
| K0002210M004C | Elcometer 2210/4 with calibration certificate | 4.3mm            | 222 - 1,110              | ● <sup>2</sup> |
| K0002210M005C | Elcometer 2210/5 with calibration certificate | 5.3mm            | 460 - 1,840              | ● <sup>2</sup> |

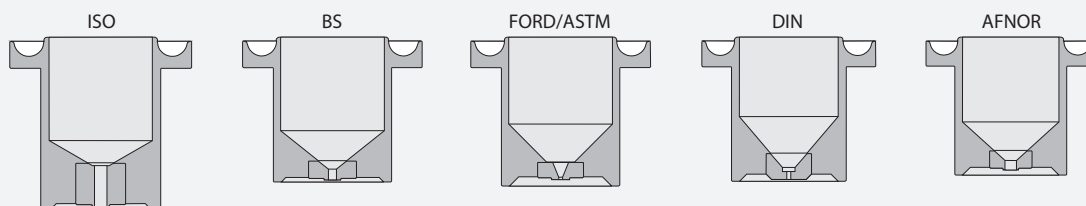**Viscosity Flow Cups - Cup Designs**

For a full range of Calibration Oils see page 10-12

<sup>1</sup> For Information Only

<sup>2</sup> Efflux Time Certificate

● Calibration Certificate supplied as standard. ◇ Batch Calibration Certificate supplied as standard.

## Elcometer 2410

## Elcometer Viscosity Dip Cup Standard Calibration Oils



In order to check the viscosity cup's calibration or to certify it for ISO purposes, it is imperative that viscosity cup standard calibration oils are used.

Standard oils have a specific drain time, dependent upon the viscosity cup type (Ford, Shell, Zahn, etc.) and the orifice or cup number used.

To check the viscosity cup, use the standard viscosity oils in place of the liquid and measure the drain time.

Specific calibration oils can only be used with specific flow and dip cups. Please use the table below to determine which calibration oil is required with each cup, or contact Elcometer. Viscosity oils are supplied in ½ litre (1 pint) bottles.

### Technical Specification

| Part Number  | Zahn | Dip Cups    |                   |             |       | Kinematic Viscosity at 25°C (77°F)* | Certificate |
|--------------|------|-------------|-------------------|-------------|-------|-------------------------------------|-------------|
|              |      | DIN Frikmar | ASTM/FORD Frikmar | ISO Frikmar | Shell |                                     |             |
| K0002410M021 | 1    |             |                   | 3           | 2     | 34cSt                               | ●           |
| K0002410M022 | 2    | 4           |                   | 4           | 4     | 120cSt                              | ●           |
| K0002410M023 | 3    | 4           | 4                 | 6           | 5     | 230cSt                              | ●           |
| K0002410M024 | 4    | 4           |                   | 6           | 6     | 420cSt                              | ●           |
| K0002410M025 | 5    |             |                   |             |       | 710cSt                              | ●           |
| K0002410M026 | 6    |             |                   |             |       | 1,200cSt                            | ●           |

\* Nominal Value

● Calibration certificate supplied as standard.




Elcometer

Viscosity Flow Cups Accessories

Accessories



K0007300M201 Elcometer 7300 High Precision Stopwatch



KT002400N003 Elcometer 2400 Conversion Disc  
Allowing viscosity (cSt) and flow times of different cups to be calculated.  
Front: No.4 cups according to AFNOR, BS, NF, ASTM, DIN, Zahn 2  
Back: No.3-4-5-6 cups according to ISO and Zahn 3

Thermometers



To accurately measure flow for viscosity the temperature needs to be 23°C ±2°C (73.4°F ±3.6°F). Here are a range of thermometers from Elcometer. For more information see page 5-10.

- |            |  |
|------------|--|
| T1164441-  | Spirit Thermometer in °C   |
| T1164442-  | Spirit Thermometer in °F   |
| G212----1A | Elcometer 212 Digital Pocket Thermometer (°C/°F) with Liquid Probe<br>For more information see page 5-11 |
| G213----2  | Elcometer 213/2 Digital Thermometer (°C/°F)  |
| T9996390-  | Elcometer 213/2 Liquid Probe<br>For more information see page 5-12                                       |

## Elcometer

## Viscosity Cup Conversion

The table below lists the major flow cup types together with a conversion chart of Efflux Time (in seconds) to Viscosity in Centistokes (cSt). It has been constructed from the various International Standard calculators.

Each cup design is unique, care must be taken when comparing viscosity values between different cup types. These values are the absolute values and do not include the allowed tolerances, as these differ considerably between each of the Standards.

| Time<br>(seconds) | DIN | BS   |      |     |      | ISO  |      |     |      | FORD / ASTM |     |     |     | ZAHN |     |      |      |      | SHELL |      |     |     |     |      |
|-------------------|-----|------|------|-----|------|------|------|-----|------|-------------|-----|-----|-----|------|-----|------|------|------|-------|------|-----|-----|-----|------|
|                   | 4   | 3    | 4    | 5   | 6    | 3    | 4    | 5   | 6    | 1           | 2   | 3   | 4   | 1    | 2   | 3    | 4    | 5    | 1     | 2    | 3   | 4   | 5   | 6    |
| 15                | 38  |      |      | 35  | 66   |      |      | 35  | 66   |             |     | 19  | 40  |      | 4   | 88   | 148  | 322  |       |      | 20  | 48  | 91  | 235  |
| 16                | 45  |      |      | 39  | 75   |      |      | 39  | 75   |             |     | 22  | 44  |      | 7   | 99   | 163  | 345  |       |      | 21  | 52  | 98  | 251  |
| 17                | 51  |      |      | 43  | 84   |      |      | 43  | 84   |             |     | 24  | 48  |      | 11  | 111  | 178  | 368  |       |      | 23  | 55  | 104 | 267  |
| 18                | 57  |      |      | 47  | 93   |      |      | 47  | 93   |             |     | 26  | 52  |      | 14  | 123  | 192  | 391  | 1.1   | 7.5  | 24  | 59  | 111 | 284  |
| 19                | 63  |      |      | 51  | 101  |      |      | 51  | 101  |             | 1   | 29  | 56  |      | 18  | 135  | 207  | 414  | 1.4   | 8.1  | 26  | 62  | 117 | 300  |
| 20                | 69  |      |      | 55  | 110  |      |      | 55  | 110  |             | 3   | 31  | 60  |      | 21  | 146  | 222  | 437  | 1.6   | 8.6  | 27  | 66  | 124 | 316  |
| 21                | 74  |      |      | 58  | 118  |      |      | 58  | 118  |             | 4   | 33  | 64  |      | 25  | 158  | 237  | 460  | 1.8   | 9.2  | 29  | 69  | 130 | 332  |
| 22                | 80  |      |      | 62  | 126  |      |      | 62  | 126  |             | 6   | 36  | 67  |      | 28  | 170  | 252  | 483  | 2.0   | 9.8  | 30  | 72  | 137 | 348  |
| 23                | 85  | 1    |      | 66  | 134  | 1    |      | 66  | 134  |             | 7   | 38  | 71  |      | 32  | 181  | 266  | 506  | 2.3   | 10.4 | 32  | 76  | 143 | 365  |
| 24                | 91  | 2    |      | 70  | 142  | 2    |      | 70  | 142  |             | 9   | 40  | 75  |      | 35  | 193  | 281  | 529  | 2.5   | 10.9 | 33  | 79  | 150 | 381  |
| 25                | 96  | 3    |      | 73  | 150  | 3    |      | 73  | 150  |             | 10  | 43  | 79  |      | 39  | 205  | 296  | 552  | 2.7   | 11.5 | 35  | 83  | 156 | 397  |
| 26                | 101 | 4    |      | 77  | 157  | 4    |      | 77  | 157  |             | 12  | 45  | 83  |      | 42  | 216  | 311  | 575  | 2.9   | 12.1 | 36  | 86  | 163 | 413  |
| 27                | 107 | 4.5  |      | 80  | 165  | 4.5  |      | 80  | 165  |             | 13  | 47  | 87  |      | 46  | 228  | 326  | 598  | 3.2   | 12.7 | 38  | 90  | 169 | 429  |
| 28                | 112 | 5    |      | 84  | 173  | 5    |      | 84  | 173  |             | 14  | 49  | 91  |      | 49  | 240  | 340  | 621  | 3.4   | 13.2 | 39  | 93  | 176 | 446  |
| 29                | 117 | 6    |      | 88  | 180  | 6    |      | 88  | 180  |             | 16  | 52  | 94  |      | 53  | 252  | 355  | 644  | 3.6   | 13.8 | 41  | 97  | 182 | 462  |
| 30                | 122 | 6.6  | 34.5 | 91  | 188  | 6.6  | 34.5 | 91  | 188  |             | 17  | 54  | 98  | 1    | 56  | 263  | 370  | 667  | 3.8   | 14.4 | 42  | 100 | 189 | 478  |
| 31                | 127 | 7.3  | 36.0 | 95  | 196  | 7.3  | 36.0 | 95  | 196  |             | 19  | 56  | 102 | 2    | 60  | 275  | 385  | 690  | 4.1   | 15.0 | 44  | 104 | 195 | 494  |
| 32                | 132 | 7.9  | 37.5 | 98  | 203  | 7.9  | 37.5 | 98  | 203  |             | 20  | 59  | 106 | 3    | 63  | 287  | 400  | 713  | 4.3   | 15.6 | 45  | 107 | 202 | 510  |
| 33                | 137 | 8.6  | 38.0 | 102 | 210  | 8.6  | 38.0 | 102 | 210  |             | 22  | 61  | 110 | 4    | 67  | 298  | 414  | 736  | 4.5   | 16.1 | 47  | 110 | 208 | 527  |
| 34                | 142 | 9.2  | 41.0 | 105 | 218  | 9.2  | 41.0 | 105 | 218  |             | 23  | 63  | 114 | 6    | 70  | 310  | 429  | 759  | 4.7   | 16.7 | 48  | 114 | 215 | 543  |
| 35                | 147 | 9.8  | 42.0 | 109 | 225  | 9.8  | 42.0 | 109 | 225  |             | 24  | 66  | 117 | 7    | 74  | 322  | 444  | 782  | 5.0   | 17.3 | 50  | 117 | 221 | 559  |
| 36                | 152 | 10.4 | 44.0 | 112 | 233  | 10.4 | 44.0 | 112 | 233  |             | 26  | 68  | 121 | 8    | 77  | 333  | 459  | 805  | 5.2   | 17.9 | 51  | 121 | 228 | 575  |
| 37                | 157 | 11.0 | 45.2 | 115 | 240  | 11.0 | 45.2 | 115 | 240  |             | 27  | 70  | 125 | 9    | 81  | 345  | 474  | 828  | 5.4   | 18.4 | 53  | 124 | 234 | 591  |
| 38                | 162 | 11.6 | 47.0 | 119 | 247  | 11.6 | 47.0 | 119 | 247  | 1           | 29  | 73  | 129 | 10   | 84  | 357  | 488  | 851  | 5.6   | 19.0 | 54  | 128 | 241 | 608  |
| 39                | 167 | 12.1 | 48.0 | 122 | 254  | 12.1 | 48.0 | 122 | 254  | 2           | 30  | 75  | 133 | 11   | 88  | 369  | 503  | 874  | 5.9   | 19.6 | 56  | 131 | 247 | 624  |
| 40                | 172 | 12.7 | 50.0 | 126 | 262  | 12.7 | 50.0 | 126 | 262  | 2           | 32  | 77  | 137 | 12   | 91  | 380  | 518  | 897  | 6.1   | 20.2 | 57  | 135 | 254 | 640  |
| 41                | 176 | 13.3 | 51.2 | 129 | 269  | 13.3 | 51.2 | 129 | 269  | 3           | 33  | 80  | 141 | 13   | 95  | 392  | 533  | 920  | 6.3   | 20.7 | 59  | 138 | 260 | 656  |
| 42                | 181 | 13.8 | 53.0 | 133 | 276  | 13.8 | 53.0 | 133 | 276  | 4           | 35  | 82  | 144 | 14   | 98  | 404  | 548  | 943  | 6.6   | 21.3 | 60  | 141 | 267 | 672  |
| 43                | 186 | 14.4 | 54.0 | 136 | 283  | 14.4 | 54.0 | 136 | 283  | 4           | 36  | 84  | 148 | 15   | 102 | 415  | 562  | 966  | 6.8   | 21.9 | 62  | 145 | 273 | 689  |
| 44                | 191 | 14.9 | 56.0 | 139 | 291  | 14.9 | 56.0 | 139 | 291  | 5           | 37  | 86  | 152 | 17   | 105 | 427  | 577  | 989  | 7.0   | 22.5 | 63  | 148 | 280 | 705  |
| 45                | 196 | 15.5 | 57.0 | 143 | 298  | 15.5 | 57.0 | 143 | 298  | 5           | 39  | 89  | 156 | 18   | 109 | 439  | 592  | 1012 | 7.2   | 23.0 | 65  | 152 | 286 | 721  |
| 46                | 200 | 16.0 | 59.0 | 146 | 305  | 16.0 | 59.0 | 146 | 305  | 6           | 40  | 91  | 160 | 19   | 112 | 450  | 607  | 1035 | 7.5   | 23.6 | 66  | 155 | 293 | 737  |
| 47                | 205 | 16.6 | 60.0 | 149 | 312  | 16.6 | 60.0 | 149 | 312  | 6           | 42  | 93  | 164 | 20   | 116 | 462  | 622  | 1058 | 7.7   | 24.2 | 68  | 159 | 299 | 753  |
| 48                | 210 | 17.1 | 62.0 | 153 | 319  | 17.1 | 62.0 | 153 | 319  | 7           | 43  | 96  | 168 | 21   | 119 | 474  | 636  | 1081 | 7.9   | 24.8 | 69  | 162 | 306 | 770  |
| 49                | 215 | 17.6 | 63.5 | 156 | 326  | 17.6 | 63.5 | 156 | 326  | 7           | 45  | 98  | 171 | 22   | 123 | 486  | 651  | 1104 | 8.1   | 25.3 | 71  | 166 | 312 | 786  |
| 50                | 219 | 18.2 | 64.5 | 160 | 334  | 18.2 | 64.5 | 160 | 334  | 8           | 46  | 100 | 175 | 23   | 126 | 497  | 666  | 1127 | 8.4   | 25.9 | 72  | 169 | 319 | 802  |
| 51                | 224 | 18.7 | 66.0 | 163 | 341  | 18.7 | 66.0 | 163 | 341  | 8           | 48  | 103 | 179 | 24   | 130 | 509  | 681  | 1150 | 8.6   | 26.5 | 74  | 173 | 325 | 818  |
| 52                | 229 | 19.2 | 67.5 | 166 | 348  | 19.2 | 67.5 | 166 | 348  | 8           | 49  | 105 | 183 | 25   | 133 | 521  | 696  | 1173 | 8.8   | 27.1 | 76  | 176 | 332 | 834  |
| 53                | 234 | 19.7 | 69.0 | 170 | 355  | 19.7 | 69.0 | 170 | 355  | 9           | 50  | 107 | 187 | 26   | 137 | 532  | 710  | 1196 | 9.0   | 27.6 | 77  | 179 | 338 | 851  |
| 54                | 238 | 20.2 | 70.0 | 173 | 362  | 20.2 | 70.0 | 173 | 362  | 9           | 52  | 110 | 191 | 28   | 140 | 544  | 725  | 1219 | 9.3   | 28.2 | 79  | 183 | 345 | 867  |
| 55                | 243 | 20.7 | 71.5 | 176 | 369  | 20.7 | 71.5 | 176 | 369  | 10          | 53  | 112 | 194 | 29   | 144 | 556  | 740  | 1242 | 9.5   | 28.8 | 80  | 186 | 351 | 883  |
| 56                | 248 | 21.2 | 73.0 | 180 | 376  | 21.2 | 73.0 | 180 | 376  | 10          | 55  | 114 | 198 | 30   | 147 | 567  | 755  | 1265 | 9.7   | 29.4 | 82  | 190 | 358 | 899  |
| 57                | 253 | 21.7 | 75.0 | 183 | 383  | 21.7 | 75.0 | 183 | 383  | 11          | 56  | 116 | 202 | 31   | 151 | 579  | 770  | 1288 | 9.9   | 30.0 | 83  | 193 | 364 | 915  |
| 58                | 257 | 22.2 | 76.0 | 186 | 390  | 22.2 | 76.0 | 186 | 390  | 11          | 58  | 119 | 206 | 32   | 154 | 591  | 784  | 1311 | 10.2  | 30.5 | 85  | 197 | 371 | 932  |
| 59                | 262 | 22.7 | 77.0 | 190 | 397  | 22.7 | 77.0 | 190 | 397  | 12          | 59  | 121 | 210 | 33   | 158 | 603  | 799  | 1334 | 10.4  | 31.1 | 86  | 200 | 377 | 948  |
| 60                | 267 | 23.2 | 79.0 | 193 | 405  | 23.2 | 79.0 | 193 | 405  | 12          | 60  | 123 | 214 | 34   | 161 | 614  | 814  | 1357 | 10.6  | 31.7 | 88  | 204 | 384 | 964  |
| 65                | 290 | 26   | 86.0 | 210 | 440  | 26   | 86.0 | 210 | 440  | 15          | 68  | 135 | 233 | 40   | 179 | 673  | 888  | 1472 | 11.8  | 34.6 | 95  | 221 | 416 | 1045 |
| 70                | 313 | 28   | 93.0 | 226 | 475  | 28   | 93.0 | 226 | 475  | 17          | 75  | 147 | 252 | 45   | 196 | 731  | 962  | 1587 | 12.9  | 37.4 | 103 | 238 | 449 | 1126 |
| 75                | 337 | 31   | 100  | 243 | 510  | 31   | 100  | 243 | 510  | 20          | 82  | 158 | 271 | 51   | 214 | 790  | 1036 | 1702 | 14.0  | 40.3 | 110 | 255 | 481 | 1207 |
| 80                | 360 | 33   | 108  | 260 | 545  | 33   | 108  | 260 | 545  | 22          | 89  | 170 | 291 | 56   | 231 | 848  | 1110 | 1817 | 15.1  | 43.2 | 118 | 273 | 514 | 1288 |
| 85                | 383 | 35   | 115  | 276 | 580  | 35   | 115  | 276 | 580  | 25          | 96  | 181 | 310 | 61.6 | 249 | 907  | 1184 | 1932 | 16.3  | 46.1 | 125 | 290 | 546 | 1369 |
| 90                | 406 | 38   | 122  | 293 | 615  | 38   | 122  | 293 | 615  | 27          | 104 | 193 | 329 | 67   | 266 | 965  | 1258 | 2047 | 17.4  | 49.0 | 133 | 307 | 579 | 1450 |
| 100               | 452 | 42   | 135  | 326 | 684  | 42   | 135  | 326 | 684  | 32          | 118 | 216 | 368 | 78   | 301 | 1082 | 1406 | 2277 | 19.7  | 54.7 | 148 | 342 | 644 | 1612 |
| 110               | 499 | 47   |      | 359 | 754  | 47   |      | 359 | 754  | 37          | 132 | 239 | 406 | 89   | 336 | 1199 | 1554 | 2507 | 21.9  | 60.5 | 163 | 376 | 709 | 1774 |
| 120               | 545 | 51   |      | 392 | 823  | 51   |      | 392 | 823  | 42          | 147 | 262 | 445 | 100  | 371 | 1316 | 1702 | 2737 | 24.2  | 66.2 | 178 | 411 | 774 | 1936 |
| 130               | 591 | 56   |      | 425 | 893  | 56   |      | 425 | 893  | 47          | 161 | 285 | 483 | 111  | 406 | 1433 | 1850 | 2967 | 26.4  | 72.0 | 193 | 445 | 839 | 2098 |
| 140               | 637 | 61   |      | 458 | 962  | 61   |      | 458 | 962  | 51          | 176 | 308 | 522 | 122  | 441 | 1550 | 1998 | 3197 | 28.7  | 77.8 | 208 | 480 | 904 | 2260 |
| 150               | 682 | 65   |      | 491 | 1031 | 65   |      | 491 | 1031 | 56          | 190 | 331 | 560 | 133  | 476 | 1667 | 2146 | 3427 | 31.0  | 83.5 | 223 | 514 | 969 | 2422 |

All measurements are in Centistokes (cSt). Centipoise (cP) = cSt x product density

## Elcometer

## Black Polo Shirt



## Technical Specification

| Part Number        | Size      | Chest              | Height                |
|--------------------|-----------|--------------------|-----------------------|
| <b>MT29173-S</b>   | Small     | 84-92cm (33-36")   | 164-170cm (5'5"-5'7") |
| <b>MT29173-M</b>   | Medium    | 92-100cm (36-38")  | 170-176cm (5'7"-5'9") |
| <b>MT29173-L</b>   | Large     | 100-108cm (38-42") | 176-182cm (5'9"-6'0") |
| <b>MT29173-XL</b>  | X-Large   | 108-116cm (42-45") | 182-188cm (6'0"-6'2") |
| <b>MT29173-2XL</b> | XX-Large  | 116-124cm (45-49") | 188-194cm (6'2"-6'6") |
| <b>MT29173-3XL</b> | XXX-Large | 124-132cm (49-52") | 194-200cm (6'6"-6'8") |

## Elcometer

## Black Soft Shell Jacket



## Technical Specification

| Part Number        | Size      | Chest              | Height                |
|--------------------|-----------|--------------------|-----------------------|
| <b>MT29166-S</b>   | Small     | 84-92cm (33-36")   | 164-170cm (5'5"-5'7") |
| <b>MT29166-M</b>   | Medium    | 92-100cm (36-38")  | 170-176cm (5'7"-5'9") |
| <b>MT29166-L</b>   | Large     | 100-108cm (38-42") | 176-182cm (5'9"-6'0") |
| <b>MT29166-XL</b>  | X-Large   | 108-116cm (42-45") | 182-188cm (6'0"-6'2") |
| <b>MT29166-2XL</b> | XX-Large  | 116-124cm (45-49") | 188-194cm (6'2"-6'6") |
| <b>MT29166-3XL</b> | XXX-Large | 124-132cm (49-52") | 194-200cm (6'6"-6'8") |

## Elcometer

## Black Baseball Cap



## Technical Specification

| Part Number    | Description             |
|----------------|-------------------------|
| <b>MT29158</b> | Baseball Cap - One Size |



jetco<sup>®</sup>





# Inspection Kits







**Elcometer offers one of the widest range of inspection equipment available. Our products are used across numerous industry sectors. In all cases, there is always a need to undertake a number of specific inspections during quality control assessments - as one parameter can affect another.**

One inspection parameter can affect another, for example the thickness of an applied coating can affect properties such as adhesion, gloss, colour and porosity.

Elcometer has put together a number of inspection kits which are both product and industry specific - combining specialist gauges from our range into one robust carry case, ideal for transporting to and from the inspection site.

Elcometer inspection kits are available for the following:

- Digital Inspection
- Blasting Inspection
- Protective Coating Inspection
- Automotive Inspection
- Qualicoat & Powder Inspection
- Surface Contamination
- Soluble Salt & Ion Specific Inspection
- Pinhole & Holiday Detection
- Heating, Ventilation & AC Duct Inspection

These kits can be customised to meet your particular requirements, please contact your distributor for further information.



## Elcometer

## Digital Inspection Kits



These digital inspection kits have been specifically designed to undertake the three principal inspection requirements in the Protective and Industrial Coatings Industry – climate, surface profile and dry film thickness. Ideal for ‘paperless’ quality assurance systems, the Top Kit comes complete with the ElcoMaster® Data Management Software for professional reporting and analysis.

Two inspection kits are available (Basic & Top) to meet your specific needs.

Measurement parameters include:

- Surface profile
- Climatic conditions
- Coating thickness



## STANDARDS:

AS 2331.1.4, AS 3894.3-B, AS/NZS 1580.108.1, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 4417-B, ASTM D 7091, ASTM E 376, ASTM G 12, BS 3900-C5-6B, BS 3900-C5-6A, BS 5411-11, BS 5411-3, BS 5599, DIN 50981, BS 7079-B4, DIN 50984, ECCA T1, EN 13523-1, IMO MSC.215(82), IMO MSC.244 (83), ISO 1461, ISO 19840, ISO 2063, ISO 2360, ISO 2808-6A, ISO 2808-6B, ISO 2808-7C, ISO 2808-7D, ISO 2808-12, ISO 8502-4, JIS K 5600-1-7, NF T30-124, SANS 5772, SS 184159, SSPC PA 2, US Navy PPI 63101-000, US Navy NSI 009-32

## Contents

| Model         | Description                                  | Basic Kit | Top Kit | Page |
|---------------|--|-----------|---------|------|
| Elcometer 224 | Integral Digital Surface Profile Gauge       | Model B   | Model T | 3-9  |
| Elcometer 319 | Digital Dewpoint Meter                       | Standard  | Top     | 5-3  |
| Elcometer 319 | External Magnetic Surface Probe              |           | ■       | 5-6  |
| Elcometer 456 | Ferrous/FNF Separate Coating Thickness Gauge | Model B   | Model T | 7-6  |
| Elcometer 456 | Ferrous/FNF Standard Separate Probe: Scale 1 | ■         | ■       | 7-18 |
| Elcometer 456 | Ferrous/FNF PINIP Probe: Scale 1             | □         | □       | 7-18 |
| ElcoMaster®   | Data Management Software and USB Cable       |           | ■       | 12-2 |

## Technical Specification

| Part Number       | Description                                  |
|-------------------|--|
| YKIT-DIGITAL-B    | Elcometer Basic Digital Inspection Kit (F)   |
| YKIT-DIGITAL-T    | Elcometer Top Digital Inspection Kit (F)     |
| YKIT-DIGITALFNF-B | Elcometer Basic Digital Inspection Kit (FNF) |
| YKIT-DIGITALFNF-T | Elcometer Top Digital Inspection Kit (FNF)   |

□ Space in kit to fit, but not supplied. Order separately if required.

## Elcometer

## Blasting Inspection Kits



The Elcometer Blasting Inspection Kit is a surface preparation inspection kit providing a range of inspection equipment to test surface profile and surface contamination of blasted profiles.

An Elcometer 456 Gauge and probe can also be supplied. (Order separately if required.)

Measurement parameters include:

- Surface assessment
- Blast equipment inspection
- Surface profile
- Surface contamination

## STANDARDS:

AS 3894.5, AS 3894.6-A, AS 3894.6-C, AS 3894.6-D, ASTM D 2200, ASTM D 4417-A, ASTM D 4417-B, ASTM D 4417-C, BS 7079-C5, IMO MSC.215(82), IMO MSC.244(83), ISO 8501-1, ISO 8502-3, ISO 8502-5, ISO 8502-6, ISO 8502-9, ISO 8503-1, ISO 8503-2, ISO 8503-5, NACE RP0287, SANS 5772, SS 55900, SSPC Guide 15, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000

## Contents

| Model           | Description                             | Kit 1 | Kit 2 | Page |
|-----------------|---|-------|-------|------|
| Elcometer 128   | Pictorial Standards <sup>1</sup>        | ■     | ■     | 3-3  |
| Elcometer 102   | Needle Pressure Gauge                   | ■     | ■     | 1-9  |
| Elcometer 103   | Blast Nozzle Gauge                      | ■     | ■     | 1-9  |
| Elcometer 125   | Surface Comparator, Grit                | ■     |       | 3-14 |
| Elcometer 125   | Surface Comparator, Shot                | ■     |       | 3-14 |
| Elcometer 122   | Testex Tape, Coarse                     | ■     |       | 3-13 |
| Elcometer 122   | Testex Tape, Extra Coarse               | ■     |       | 3-13 |
| Elcometer 124   | Thickness Gauge                         | ■     |       | 3-14 |
| Elcometer 224   | Surface Profile Separate Gauge, Model T |       | ■     | 3-6  |
| Elcometer 224   | Standard Separate Probe                 |       | ■     | 3-8  |
| Elcometer 142   | Dust Tape Test Kit                      |       | ■     | 4-22 |
| Elcometer 134   | Chlor*Test Surface Testing Kit          | ■     | ■     | 4-19 |
| Elcometer 134   | Chlor*Test Abrasive Testing Kit         | ■     | ■     | 1-3  |
| Elcometer 134   | Chlor*Test Water Testing Kit            | ■     | ■     | 1-3  |
| Elcometer 138   | Bresle Salt Kit <sup>2</sup>            |       | ■     | 4-14 |
| Elcometer 138/2 | Surface Contamination Kit               |       | ■     | 1-5  |
| ElcoMaster®     | Data Management Software & USB Cable    |       | ■     | 12-2 |

<sup>1</sup>Swedish Rust Standard ISO 8501, SIS055900 supplied in Metric Kit

US Standard SSPC VIS 1-01 and VIS-3 supplied in Imperial Kit

<sup>2</sup>Supplied with Elcometer 135C Bresle Test Patches (x50)

## Technical Specification

| Part Number<br>Metric | Imperial      | Description                               |
|-----------------------|---------------|---|
| YKIT-BLAST-1M         | YKIT-BLAST-1E | Elcometer Blasting Inspection Kit 1       |
| YKIT-BLAST-2M         | YKIT-BLAST-2E | Elcometer Blasting Inspection Kit 2       |
| Dimensions            | Kit 1         | 495 x 420 x 175mm (19.49 x 16.54 x 6.89") |
|                       | Kit 2         | 575 x 475 x 205mm (22.64 x 18.70 x 8.07") |

## Elcometer

### Protective Coating Inspection Kits 1, 2 & 3



The Elcometer Protective Coatings Inspection Kits 1, 2 & 3 provide the tools required for the on-site inspection of a coating, including surface profile, dewpoint, relative humidity, both wet and dry film thickness and adhesive testing.

Available as metric or imperial kits and housed in a sturdy, lightweight carry case, the Elcometer Protective Coatings Inspection Kits are invaluable to the operator in the field to ensure the coating is, or has been, applied correctly.

#### Protective Inspection Kit 1

An entry level inspection kit containing profile, climate, wet and dry film thickness gauges.

#### Protective Inspection Kit 2

Like the Protective Inspection Kit 1 but with the addition of the Elcometer 224 digital surface profile gauge with data collection functionality and the Elcometer 319 digital dewpoint meter. Reports via ElcoMaster® Software can include data from both profile and climate inspections as well as dry film thickness.

#### Protective Inspection Kit 3

A comprehensive digital inspection kit providing gauges with data collection functionality for profile, climatic conditions and dry film thickness.

It comes complete with ElcoMaster® Software with Bluetooth® communication to PC and Android™ Mobile Apps for instant data analysis and reporting for paperless quality assurance.

Measurement parameters include:

- Surface profile
- Surface temperature
- Climatic conditions
- Coating thickness
- Adhesion



#### STANDARDS:

AS 1580.408.4, AS 2331.1.4, AS 3894.3-B, AS 3894.9, AS/NZS 1580.107.3, AS/NZS 1580.108.1, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 3359-B, ASTM D 4414-A, ASTM D 4417-B, ASTM D 4417-C, ASTM D 7091, ASTM E 376, ASTM G 12, BS 3900-C5-6B, BS 3900-C5-6A, BS 3900-C5-7B, BS 3900-E6, BS 7079-C5, BS 5411-11, BS 5411-3, BS 5599, BS 7079-B4, DIN 50981, DIN 50984, ECCA T1, ECCA T6, EN 13523-1, EN 13523-6, IMO MSC.215(82), IMO MSC.244(83), ISO 1461, ISO 16276-2, ISO 19840, ISO 2063, ISO 2360, ISO 2409, ISO 2808-1A, ISO 2808-6A, ISO 2808-6B, ISO 2808-7B, ISO 2808-7C, ISO 2808-7D, ISO 2808-12, ISO 8502-4, ISO 8503-5, JIS K 5600-1-7, JIS K 5600-5-6, NACE RP0287, NF T30-038, NF T30-124, NF T30-125, SANS 5772, SS 184159, SSPC PA 2, US Navy NSI 009-32, US Navy PPI 63101-000



## Elcometer

## Protective Coating Inspection Kits 1, 2 & 3

### Contents

| Model         | Description  | Kit 1              | Kit 2<br>Standard   | Kit 2<br>Top        | Kit 3<br>Standard   | Kit 3<br>Top        | Page |
|---------------|--|--------------------|---------------------|---------------------|---------------------|---------------------|------|
| Elcometer 122 | Testex Tape, Coarse & Extra Coarse                                   | ■                  | ■                   | ■                   |                     |                     | 3-13 |
| Elcometer 124 | Thickness Gauge  | ■                  | ■                   | ■                   |                     |                     | 3-14 |
| Elcometer 224 | Digital Surface Profile Gauge  |                    | Model B<br>Integral | Model T<br>Separate | Model B<br>Integral | Model T<br>Separate | 3-6  |
| Elcometer 224 | Standard Separate Probe  |                    |                     | ■                   |                     | ■                   | 3-8  |
| Elcometer 212 | Digital Thermometer °C (°F) with Surface Probe                       | ■                  |                     |                     |                     |                     | 5-11 |
| Elcometer 116 | Whirling Hygrometer °C (Metric),<br>Sling Hygrometer °F (Imperial)   | ■                  |                     |                     |                     |                     | 5-9  |
| Elcometer 114 | Dewpoint Calculator  | ■                  |                     |                     |                     |                     | 5-9  |
| Elcometer 319 | Digital Dewpoint Meter   |                    | Standard            | Top                 | Standard            | Top                 | 5-3  |
| Elcometer 112 | Hexagonal Wet Film Comb<br>25 - 3000µm (1 - 120mils)                 | ■                  | ■                   | ■                   |                     |                     | 6-3  |
| Elcometer 115 | Wet Film Comb (Set of 4)   |                    |                     |                     | ■                   | ■                   | 6-4  |
| Elcometer 456 | Integral Digital Coating Thickness Gauge,<br>0 - 1500µm (0 - 60mils) | Ferrous<br>Model B |                     |                     |                     |                     | 7-26 |
| Elcometer 456 | Separate Digital Coating Thickness Gauge                             |                    | Ferrous<br>Model S  | Ferrous<br>Model S  | Dual FNF<br>Model T | Dual FNF<br>Model T | 7-6  |
| Elcometer 456 | Standard Separate Probe,<br>0 - 1500µm (0 - 60mils)                  |                    | Ferrous             | Ferrous             | Dual FNF            | Dual FNF            | 7-18 |
| Elcometer 107 | Cross Hatch Full Kit <sup>1</sup>                                    | ■                  | ■                   | ■                   | ■                   | ■                   | 8-36 |
| ElcoMaster®   | Data Management Software & USB Cable                                 |                    | ■                   | ■                   | ■                   | ■                   | 12-2 |

<sup>1</sup> Kit 1: supplied with 6 x 1mm and 6 x 2mm cutters, Kits 2 & 3 Metric: supplied with 6 x 2mm cutter, Kits 2 & 3 Imperial: supplied with 6 x 1mm cutter

### Technical Specification

| Part Number<br>Metric | Imperial            | Description                                    | Certificate |
|-----------------------|---------------------|--|-------------|
| YKIT-PROTECTIVE-1M    | YKIT-PROTECTIVE-1E  | Elcometer Protective Inspection Kit 1          | ●           |
| YKIT-PROTECTIVE-2SM   | YKIT-PROTECTIVE-2SE | Elcometer Protective Inspection Kit 2 Standard | ●           |
| YKIT-PROTECTIVE-2TM   | YKIT-PROTECTIVE-2TE | Elcometer Protective Inspection Kit 2 Top      | ●           |
| YKIT-PROTECTIVE-3SM   | YKIT-PROTECTIVE-3SE | Elcometer Protective Inspection Kit 3 Standard | ●           |
| YKIT-PROTECTIVE-3TM   | YKIT-PROTECTIVE-3TE | Elcometer Protective Inspection Kit 3 Top      | ●           |
| Dimensions            | Kit 1               | 456 x 384 x 110mm (17.95 x 15.12 x 4.33")      |             |
|                       | Kit 2               | 456 x 384 x 127mm (17.95 x 15.12 x 5.00")      |             |
|                       | Kit 3               | 456 x 384 x 127mm (17.95 x 15.12 x 5.00")      |             |

If the kit that you require is not listed above, Elcometer will be happy to discuss your requirements and create one to suit your particular needs.

● Certificates available on applicable gauges

## Elcometer

## Protective Coating Inspection Kit 4



The Elcometer Protective Coatings Inspection Kit 4 provides a range of test equipment to help an inspector assess a substrate prior to the application of a coating.

Measurement parameters include:

- Surface inspection
- Weld inspection
- Surface cleanliness
- Climatic conditions
- Surface profile
- Coating thickness



## STANDARDS:

AS 2331.1.4, AS 3894.3-B, AS 3894.6-A, AS 3894.6-C, AS 3894.9, AS/NZS 1580.107.3, AS/NZS 1580.108.1, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 2200, ASTM D 4414-A, ASTM D 4417-C, ASTM D 7091, ASTM E 376, ASTM G 12, BS 3900-C5-6A, BS 3900-C5-6B, BS 5411-11, BS 5411-3, BS 5599, BS 7079-B4, BS 7079-C5, DIN 50981, DIN 50984, ECCA T1, EN 13523-1, IMO MSC.215(82), IMO MSC.244(83), ISO 1461, ISO 19840, ISO 2063, ISO 2360, ISO 2808-12, ISO 2808-1A, ISO 2808-6A, ISO 2808-6B, ISO 2808-7B, ISO 2808-7C, ISO 2808-7D, ISO 8501-1, ISO 8502-3, ISO 8502-4, ISO 8502-6, ISO 8502-9, ISO 8503-5, JIS K 5600-1-7, NACE RP0287, NF T30-124, NF T30-125, SANS 5772, SS 184159, SS 55900, SSPC Guide 15, SSPC PA 2, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000

## Contents

| Model            | Description   | Kit 4           | Page |
|------------------|---|-----------------|------|
| Elcometer 128    | Pictorial Standards <sup>1</sup>                                | ■               | 3-3  |
| Elcometer 131/1C | Telescopic Inspection Mirror                                    | ■               | 10-3 |
| Elcometer 144    | Paint Safe Marker Pens (Pack of 3)                              | ■               | 10-6 |
| Elcometer 147    | Weld Gauge  | ■               | 10-6 |
| Elcometer 142    | Dust Tape Test Kit  | ■               | 4-22 |
| Elcometer 138    | Bresle Salt Kit <sup>2</sup>                                    | ■               | 4-14 |
| Elcometer 319    | Digital Dewpoint Meter with Magnetic Surface Probe              | Top             | 5-3  |
| Elcometer 224    | Digital Surface Profile Integral Gauge                          | Model T         | 3-9  |
| Elcometer 112    | Hexagonal Wet Film Comb: 25 - 3000µm (1 - 120mils)              | ■               | 6-3  |
| Elcometer 456    | Separate Digital Coating Thickness Gauge with F2 Standard Probe | Ferrous Model T | 7-6  |
| ElcoMaster®      | Data Management Software & USB Cable                            | ■               | 12-2 |

## Technical Specification

| Part Number        |                    | Description                               | Certificate |
|--------------------|--------------------|---|-------------|
| Metric             | Imperial           |   |             |
| YKIT-PROTECTIVE-4M | YKIT-PROTECTIVE-4E | Elcometer Protective Coatings Kit 4       | ●           |
| Dimensions         |                    | 495 x 420 x 175mm (19.49 x 16.54 x 6.89") |             |

<sup>1</sup> Swedish Rust Standard ISO 8501, SIS055900 supplied in Metric Kit, US Standard SSPC VIS 1-01 and VIS-3 supplied in Imperial Kit

<sup>2</sup> Supplied with Elcometer 135C Bresle Test Patches (x50)

● Certificates available on applicable gauges

## Elcometer

## Protective Coating Inspection Kit 5



A more comprehensive kit than kits 1-4, the Elcometer Protective Coatings Inspection Kit 5 expands the range of instruments available to the protective coatings inspector.

Measurement parameters include:

- Material thickness
- Surface inspection
- Weld inspection
- Surface cleanliness
- Surface profile
- Climatic conditions
- Coating thickness
- Adhesion



### STANDARDS:

AS 1580.108.2, AS 1580.408.4, AS 2331.1.4, AS 3894.3-B, AS 3894.6-A, AS 3894.6-C, AS 3894.6-D, AS 3894.9, AS/NZS 1580.107.3, AS/NZS 1580.108.1, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 2200, ASTM D 3359-B, ASTM D 4138-A, ASTM D 4414-A, ASTM D 4417-C, ASTM D 7091, ASTM E 376, ASTM E 797, ASTM G 12, BS 3900-C5-5B, BS 3900-C5-6A, BS 3900-C5-6B, BS 3900-E6, BS 5411-11, BS 5411-3, BS 5599, BS 7079-B4, BS 7079-C5, DIN 50981, DIN 50984, DIN 50986, ECCA T1, ECCA T6, EN 13523-1, EN 13523-6, EN 15317, IMO MSC.215(82), IMO MSC.244(83), ISO 1461, ISO 16276-2, ISO 19840, ISO 2063, ISO 2360, ISO 2409, ISO 2808-12, ISO 2808-1A, ISO 2808-5B, ISO 2808-6A, ISO 2808-6B, ISO 2808-7B, ISO 2808-7C, ISO 2808-7D, ISO 8501-1, ISO 8502-3, ISO 8502-4, ISO 8502-6, ISO 8502-9, ISO 8503-5, JIS K 5600-1-7, NACE RP0287, NF T30-038, NF T30-123, NF T30-124, NF T30-125, SANS 5772, SS 184159, SS 55900, SSPC Guide 15, SSPC PA 2, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000

### Contents

| Model            | Description  | Kit 5           | Page |
|------------------|--|-----------------|------|
| Elcometer MTG2   | Material Thickness Gauge   | ■               | 2-3  |
| Elcometer 128    | Pictorial Standards <sup>1</sup>   | ■               | 3-3  |
| Elcometer 131/1C | Telescopic Inspection Mirror   | ■               | 10-3 |
| Elcometer 137    | LED Illuminated Magnifier  | ■               | 10-4 |
| Elcometer 144    | Paint Safe Marker Pens (Pack of 3)   | ■               | 10-6 |
| Elcometer 147    | Weld Gauge   | ■               | 10-6 |
| Elcometer 142    | Dust Tape Test Kit   | ■               | 4-22 |
| Elcometer 138    | Bresle Salt Kit <sup>2</sup>   | ■               | 4-14 |
| Elcometer 138/2  | Surface Contamination Kit  | ■               | 1-5  |
| Elcometer 122    | Testex Tape, Coarse & Extra Coarse   | ■               | 3-13 |
| Elcometer 124    | Thickness Gauge  | ■               | 3-14 |
| Elcometer 224    | Digital Surface Profile Separate Gauge & Standard Probe  | Model T         | 3-6  |
| Elcometer 319    | Digital Dewpoint Meter, with Magnetic Surface Probe  | Top             | 5-3  |
| Elcometer 112    | Hexagonal Wet Film Comb: 25 - 3000µm (1 - 120mils)   | ■               | 6-3  |
| Elcometer 456    | Separate Digital Coating Thickness Gauge with F2 Standard Probe                                | Ferrous Model T | 7-6  |
| Elcometer 121    | Paint Inspection Gauge with Cross Hatch Cutters<br>6 x 1, 2 & 3mm and ISO (ASTM) Adhesive Tape | Top             | 7-52 |
| ElcoMaster®      | Data Management Software & USB Cable   | ■               | 12-2 |

### Technical Specification

| Part Number        | Description                               | Certificate |
|--------------------|---|-------------|
| Metric             | Imperial                                  |             |
| YKIT-PROTECTIVE-5M | YKIT-PROTECTIVE-5E                        | ●           |
| Dimensions         | 575 x 475 x 205mm (22.64 x 18.70 x 8.07") |             |

<sup>1</sup> Swedish Rust Standard ISO 8501, SIS055900 supplied in Metric Kit, US Standard SSPC VIS 1-01 and VIS-3 supplied in Imperial Kit

<sup>2</sup> Supplied with Elcometer 135C Bresle Test Patches (x50)

● Certificates available on applicable gauges



## Elcometer

## Protective Coating Inspection Kit 6



The Elcometer Protective Coatings Inspection Kit 6 is a comprehensive kit which incorporates all the key gauges and inspection accessories required to assess a structure before, during and after coating has been applied.

Measurement parameters include:

- Material thickness
- Surface inspection
- Weld inspection
- Surface cleanliness
- Surface profile
- Climatic conditions
- Coating thickness
- Adhesion
- Pinhole detection



## STANDARDS:

AS 1580.108.2, AS 1580.408.4, AS 2331.1.4, AS 3894.2, AS 3894.3-B, AS 3894.6-A, AS 3894.6-C, AS 3894.6-D, AS 3894.9, AS/NZS 1580.107.3, AS/NZS 1580.108.1, ASTM B 499, ASTM D 1186-B, ASTM D 1400, ASTM D 2200, ASTM D 3359-B, ASTM D 4138-A, ASTM D 4414-A, ASTM D 4417-C, ASTM D 5162-A, ASTM D 7091, ASTM E 376, ASTM E 797, ASTM G 12, ASTM G6, ASTM G62-A, BS 3900-C5-5B, BS 3900-C5-6A, BS 3900-C5-6B, BS 3900-E6, BS 5411-11, BS 5411-3, BS 5599, BS 7079-B4, BS 7079-C5, BS 7793-2, DIN 50981, DIN 50984, DIN 50986, ECCA T1, ECCA T6, EN 13523-1, EN 13523-6, EN 15317, IMO MSC.215(82), IMO MSC.244(83), ISO 1461, ISO 14654, ISO 16276-2, ISO 19840, ISO 2063, ISO 2360, ISO 2409, ISO 2808-12, ISO 2808-1A, ISO 2808-5B, ISO 2808-6A, ISO 2808-6B, ISO 2808-7B, ISO 2808-7C, ISO 2808-7D, ISO 8289-A, ISO 8501-1, ISO 8502-3, ISO 8502-4, ISO 8502-6, ISO 8502-9, ISO 8503-5, JIS K 5600-1-7, JIS K 6766, NACERP0188, NACERP0287, NACE SP0188, NACE TM0384, NFT30-038, NFT30-123, NFT30-124, NFT30-125, SANS 5772, SS 184159, SS 55900, SSPC Guide 15, SSPC PA 2, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000

## Contents

| Model            | Description  | Kit 6           | Page |
|------------------|--|-----------------|------|
| Elcometer MTG2   | Material Thickness Gauge   | ■               | 2-3  |
| Elcometer 128    | Pictorial Standards <sup>1</sup>   | ■               | 3-3  |
| Elcometer 131/1C | Telescopic Inspection Mirror   | ■               | 10-3 |
| Elcometer 137    | LED Illuminated Magnifier  | ■               | 10-4 |
| Elcometer 144    | Paint Safe Marker Pens (Pack of 3)   | ■               | 10-6 |
| Elcometer 147    | Weld Gauge   | ■               | 10-6 |
| Elcometer 142    | Dust Tape Test Kit   | ■               | 4-22 |
| Elcometer 138    | Bresle Salt Kit <sup>2</sup>   | ■               | 4-14 |
| Elcometer 138/2  | Surface Contamination Kit  | ■               | 1-5  |
| Elcometer 122    | Testex Tape, Coarse & Extra Coarse   | ■               | 3-13 |
| Elcometer 124    | Thickness Gauge  | ■               | 3-14 |
| Elcometer 224    | Separate Digital Surface Profile Gauge with Standard Probe   | Model T         | 3-6  |
| Elcometer 319    | Digital Dewpoint Meter, with Magnetic Surface Probe  | Top             | 5-3  |
| Elcometer 112    | Hexagonal Wet Film Comb: 25 - 3000µm (1 - 120mils)   | ■               | 6-3  |
| Elcometer 456    | Separate Digital Coating Thickness Gauge with F2 Standard Probe                                    | Ferrous Model T | 7-6  |
| Elcometer 121    | Paint Inspection Gauge (Top) with Cross Hatch Cutters<br>6 x 1, 2 & 3mm & ISO (ASTM) Adhesive Tape | Top             | 7-52 |
| Elcometer 270    | Pinhole Detector (9 , 67.5 & 90V)  | ■               | 9-6  |

## Technical Specification

| Part Number        | Description  | Certificate |
|--------------------|--|-------------|
| Metric             | Imperial   |             |
| YKIT-PROTECTIVE-6M | YKIT-PROTECTIVE-6E Elcometer Protective Coatings Kit 6 | ●           |
| Dimensions         | 575 x 475 x 205mm (22.64 x 18.70 x 8.07")              |             |

<sup>1</sup> Swedish Rust Standard ISO 8501, SIS055900 supplied in Metric Kit, US Standard SSPC VIS 1-01 and VIS-3 supplied in Imperial Kit

<sup>2</sup> Supplied with Elcometer 135C Bresle Test Patches (x50)

● Certificates available on applicable gauges

## Elcometer

## Protective Inspection Kit for Hazardous Areas



The Elcometer Hazardous Area Inspection Kit is a protective coating inspection kit suitable for use in hazardous areas where electronic equipment is prohibited.

The kit provides all the tools required for the on-site inspection of a coating, including surface profile, dewpoint, relative humidity, both wet and dry film thickness and adhesive testing.

Measurement parameters include:

- Surface inspection
- Surface profile
- Surface contamination
- Climatic conditions
- Coating thickness
- Adhesion

The products contained in this kit are not tested or approved for use in Hazardous Areas. Site Management should be consulted before this kit is used.

### STANDARDS:

AS 1580.408.4, AS 2331.1.3, AS 3894.3-A, AS 3894.5, AS 3894.9, AS/NZS 1580.107.3, AS/NZS 1580.108.1, ASTM B 499, ASTM D 2200, ASTM D 3359-B, ASTM D 4414-A, ASTM D 4417-A, ASTM D 4417-C, ASTM G 12, BS 3900-C5-6A, BS 3900-C5-7B, BS 3900-E6, BS 5411-11, BS 7079-C5, DIN 50981, ECCA T6, EN 13523-6, IMO MSC.215(82), IMO MSC.244(83), ISO 16276-2, ISO 2178, ISO 2409, ISO 2808-1A, ISO 2808-6A, ISO 2808-7A, ISO 2808-7B, ISO 8501-1, ISO 8503-1, ISO 8502-5, ISO 8503-2, ISO 8503-5, JIS K 5600-1-7, JIS K 5600-5-6, NACE RP0287, NF T30-038, NF T 30-124, NF T30-125, SS 55900, SSPC Guide 15, SSPC-PA2, SSPC VIS 1, SSPC VIS 2, SSPC VIS 3, SSPC VIS 4, SSPC VIS 5, US Navy NSI 009-32, US Navy PPI 63101-000

### Contents

| Model            | Description   | Page |
|------------------|---|------|
| Elcometer 128    | Pictorial Standards <sup>1</sup>                                | 3-3  |
| Elcometer 125    | Surface Comparator, Grit  | 3-14 |
| Elcometer 125    | Surface Comparator, Shot  | 3-14 |
| Elcometer 122    | Testex Tape, Coarse   | 3-13 |
| Elcometer 122    | Testex Tape, Extra Coarse                                       | 3-13 |
| Elcometer 124    | Thickness Gauge   | 3-14 |
| Elcometer 131/1C | Telescopic Inspection Mirror                                    | 10-3 |
| Elcometer 134    | Chlor*Test Surface Testing Kit                                  | 4-20 |
| Elcometer 113    | Magnetic Thermometer °C (°F)                                    | 5-10 |
| Elcometer 116    | Whirling Hygrometer °C (Metric), Sling Hygrometer °F (Imperial) | 5-8  |
| Elcometer 114    | Dewpoint Calculator   | 5-9  |
| Elcometer 112    | Hexagonal Wet Film Comb: 25 -3000µm (1 - 120mils)               | 6-3  |
| Elcometer 211    | Thickness Gauge   | 7-42 |
| Elcometer 107    | Cross Hatch Full Kit - ISO (ASTM) Tape, Brush & Eye Glass       | 8-34 |

### Technical Specification

| Part Number    | Description    |   |
|----------------|----------------|---|
| Metric         | Imperial       |   |
| YKIT-HAZARD-1M | YKIT-HAZARD-1E | Elcometer Hazardous Area Inspection Kit   |
| Dimensions     |                | 495 x 420 x 175mm (19.49 x 16.54 x 6.89") |

<sup>1</sup> Swedish Rust Standard ISO 8501, SIS055900 supplied in Metric Kit, US Standard SSPC VIS 1-01 and VIS-3 supplied in Imperial Kit

**Elcometer 138/2****Surface Contamination Kit**

Measuring the level of contaminants on a surface prior to application of the coating is essential to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly re-coating and high maintenance costs.

The Elcometer 138/2 Surface Contamination Kit provides the user with a means for testing invisible surface contaminants including:

- pH
- chloride ions
- iron
- salts

**STANDARDS:**

AS 3894.6-A, AS 3894.6-D,  
SSPC Guide 15

**Technical Specification**

| Part Number       | Description   | Certificate |
|-------------------|---|-------------|
| <b>E138----</b> 2 | Elcometer 138/2 Surface Contamination Kit   | ●           |
| Measuring Range   | pH: 0pH to 14pH<br>Iron: 3, 10, 25, 50, 100, 250, 500mg/l Fe <sup>2</sup><br>Chloride: 30- 600µg/cm <sup>2</sup> (30 - 600ppm) Cl   |             |
| Dimensions        | 300 x 220 x 75mm (11 x 8.6 x 3")  |             |
| Weight            | 2.1kg (4.62lb)  |             |
| Packing List      | 100x pH test strips, 100x Iron test strips, 40x Chloride test strips, 50x Elcometer 135C Bresle test patches, 3 x 5ml (0.17fl oz) syringes, 3x needles, 30ml (1fl oz) plastic beaker, carry case and operating instructions |             |

**Accessories**

|                      |   |
|----------------------|---|
| <b>E135----</b> C25  | Elcometer 135C Bresle Test Patch (Pack of 25) |
| <b>E135----</b> C100 | Elcometer 135C Bresle Test Patch (Box of 100) |
| <b>T13818517</b>     | 3 x 5ml (0.17fl oz) Syringes                  |
| <b>T13818518</b>     | 3x Needles                                    |
| <b>T13818519</b>     | Plastic Beaker, 30ml (1fl oz)                 |
| <b>T13827259</b>     | Pure Distilled Water, 250ml (8.5fl oz) Bottle |
| <b>T13820562</b>     | 100x pH Test Strips                           |
| <b>T13820563</b>     | 100x Iron Test Strips                         |
| <b>T13820564</b>     | 40x Chloride Test Strips                      |



## Elcometer 138

## Bresle Salt Kit



It is essential that the level of contaminants on a surface is measured prior to application of the coating to ensure the quality of the coating and that its optimum lifetime is achieved.

If the coating is applied to a contaminated surface, which is not properly prepared, it could fail prematurely resulting in costly re-coating and high maintenance costs.

The Elcometer 138 Bresle Kits include the Elcometer 138 Bresle Salt Meter. This lightweight, portable meter measures the conductivity of the test sample using a single drop, then automatically converts this to show the density of salts, negating the need for the user to do a manual calculation when working in accordance with ISO 8502-6 or ISO 8502-9.

### STANDARDS:

AS 3894.6-A, IMO MSC.215 (82),  
IMO MSC.244 (83), ISO 8502-6,  
ISO 8502-9, SSPC Guide 15,  
US Navy NSI 009-32,  
US Navy PPI 63101-000



### Technical Specification

| Part Number       | Description  | Certificate            |
|-------------------|--|------------------------|
| E138-1C           | Elcometer 138 Bresle Salt Kit with Elcometer 138 Bresle Salt Meter and Elcometer 135C Bresle Test Patches  | •                      |
| E138-1C-CM        | Elcometer 138 Bresle Salt Kit with Elcometer 138 Conductivity Meter and Elcometer 135C Bresle Test Patches   | •                      |
| E138-1            | Elcometer 138 Bresle Salt Kit with Elcometer 138 Bresle Salt Meter and Elcometer 135B Bresle Patches   |                        |
| E138-1-CM         | Elcometer 138 Bresle Salt Kit with Elcometer 138 Conductivity Meter and Elcometer 135B Bresle Patches  |                        |
| Measurement Range | E138-1, E138-1C: ISO Mode: 0 - 2399µg/cm <sup>2</sup> IMO Mode : 0 - 2199µg/cm <sup>2</sup><br>E138-1-CM, E138-1C-CM: 0 - 19.99mS/cm   |                        |
| Accuracy*         | ±2% full scale (for each range)  |                        |
| Dimensions        | 393 x 331 x 95mm (15.5 x 13 x 3.7")  | Weight 1.4kg (3lb 1oz) |
| Packing List      | Box of 25 Elcometer 135C Bresle Test Patches (E138-1C) or Elcometer 135B Bresle Patches (E138-1), Elcometer 138 Bresle Salt Meter (E138-1C or E138-1) & Sensor, 250ml (8.45fl oz) bottle of standard 84µS/cm calibration solution with certificate, 14ml (0.47fl oz) bottle of conditioning solution, 250ml (8.5fl oz) bottle of pure water, 3 x 5ml (0.17fl oz) syringes, 3 x blunt needles, 30ml (1fl oz) plastic beaker, 2 x CR2032 batteries (supplied fitted to the Elcometer 138), transit case and user guide |                        |

### Accessories

|              |   |           |   |
|--------------|---|-----------|---|
| E135----B    | Elcometer 135B Bresle Patches (Box of 25)                         |           |   |
| E135----C25  | Elcometer 135C Bresle Test Patch (Box of 25)                      |           |   |
| E135----C100 | Elcometer 135C Bresle Test Patch (Box of 100)                     |           |   |
| T13830629-1  | Standard 84µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle   |           |   |
| T13830629-2  | Standard 1413µS/cm Calibration Solution, 250ml (8.45fl oz) Bottle |           |   |
| T13827259    | Pure Water - 250ml (8.5fl oz) Bottle                              |           |   |
| T13818517    | 3 x 5ml (0.17fl oz) Syringes                                      | E138-BSM  | Elcometer 138 Bresle Salt Meter                               |
| T13818518    | 3 x Needles   | E138-CM   | Elcometer 138 Conductivity Meter                              |
| T13818519    | Plastic Beaker 30ml (1fl oz)                                      | T13830628 | Replacement Sensor for Conductivity Meter & Bresle Salt Meter |

• Certificate of Cleanliness & Test Area available at [www.elcometer.com/cert](http://www.elcometer.com/cert)

\* See Elcometer 138 Bresle Salt Meter for full specification  
\* See Elcometer 138 Conductivity Meter for full specification

**Elcometer 138****Abrasive Soluble Salt Test Kit**

**STANDARDS:**  
ASTM D4940

Abrasives used for blast cleaning surfaces can be contaminated with soluble salts due to the source or the re-use of the blasting media. This contamination can be transferred to the blast cleaned surface and result in accelerated corrosion conditions and also cause premature coating failure, if this contamination is not removed prior to applying the coating.

Testing abrasives on site for soluble salt contamination can be carried out quickly and easily using the Elcometer 138 Abrasive Soluble Salt Test Kit, according to the ASTM D4940 method. A measured volume of the abrasive is mixed with the same volume of water and agitated to allow any soluble salts to dissolve in the water. The resulting slurry is allowed to settle and the filtered water can then be tested using a conductivity meter. The Elcometer 138 Abrasive Soluble Salt Test Kit provides all that is needed to carry out the test in the field or in the laboratory.

**Technical Specification**

| Part Number       | Description  |
|-------------------|--|
| <b>E138-A-CM</b>  | Elcometer 138 Abrasive Soluble Salt Test Kit with Elcometer 138 Conductivity Meter   |
| Measurement Range | 0 - 19.99mS/cm (see Elcometer 138 Conductivity Meter for full specification)   |
| Accuracy          | ±2% of full scale (see Elcometer 138 Conductivity Meter for full specification)  |
| Dimensions        | 456 x 384 x 127mm (18 x 15.1 x 5")   |
| Weight            | 2.2kg (4lb 14oz)   |
| Packing List      | Elcometer 138 Conductivity Meter, 1000ml (33.8 fl oz) bottle of pure distilled water, 100ml & 600ml (3.4 & 20.3 fl oz) glass beakers, 500ml (16.9fl oz) plastic measuring beaker, funnel, stirring rod, box of 100 filter papers, 1 x 14ml (0.47fl oz) standard 1413 µS/cm (1.413 mS/cm) calibration solution, 1 x 14ml (0.47fl oz) conditioning solution, 2 x CR2032 batteries, transit case and user guide |

**Accessories**

|                    |   |
|--------------------|---|
| <b>E138-CM</b>     | Elcometer 138 Conductivity Meter                                  |
| <b>T13830628</b>   | Replacement Sensor for Conductivity Meter                         |
| <b>T13830629-2</b> | Standard 1413µS/cm Calibration Solution; 250ml (8.45fl oz) Bottle |
| <b>T13827494</b>   | Pure Distilled Water 1000ml (33.8fl oz) Bottle                    |
| <b>T13827495</b>   | Glass Beaker 100ml (3.4fl oz)                                     |
| <b>T13827496</b>   | Glass Beaker 600ml (20.3fl oz)                                    |
| <b>T13827498</b>   | Plastic Measuring Beaker 500ml (16.9fl oz)                        |
| <b>T13827497</b>   | Funnel  |
| <b>T13827499</b>   | Stirring Rod  |
| <b>T13827500</b>   | Box of 100 Filter Papers (Grade 413)                              |

## Elcometer 134 CSN

## CSN Chloride, Sulphate & Nitrate Kit



Designed to accurately, measure surface chloride, sulphate and nitrate ions in minutes, the Elcometer 134 CSN Salt kit offers a single kit solution for testing in the field.

All the components of the Elcometer CSN Test Kits are pre-measured and pre-dosed for trouble free testing.

Results are recorded in parts per million (ppm) requiring no complicated calculations. Elcometer 134 CSN tests are all designed to use a ratio of 1:1 for easy conversion to  $\mu\text{g}/\text{cm}^2$ .

Supplied in an ABS plastic carry case for easy portability around the site, each field kit is supplied with full instructions attached to the inside lid, together with:

- 5x Chloride tests
- 5x Sulphate tests, together with 1x colorimeter, for sulphate testing
- 5x Nitrate test strips
- 5x Syringes (without needles)

Refill kits containing 5x chloride, nitrate and sulphate tests are available.



### STANDARDS:

ISO 8502-5, ISO 8502-11,  
SSP Guide 15

### Technical Specification

| Part Number         | Description   |
|---------------------|---|
| <b>E134-CSN</b>     | Elcometer 134 CSN Chloride, Sulphate & Nitrate Test Kit   |
| Measuring Range     | 0 - 100 $\mu\text{g}/\text{cm}^2$ (0 - 100ppm)  |
| Scale Resolution    | 1 $\mu\text{g}/\text{cm}^2$ (1ppm)  |
| Sample Time         | 1 - 5 minutes (approximately)   |
| Storage Temperature | Not exceeding 25°C (77°F)   |
| Dimensions          | 360 x 320 x 140mm (14.2 x 12.6 x 5.5")  |
| Weight              | 1.76kg (3.8lb)  |
| Packing List        | 5x tests (containing: 5x chloride tests, 5x nitrate test strips, 5x sulphate tests, 5x syringes)<br>1x colorimeter, carry case and operating instructions |

### Accessories

|                 |                                  |
|-----------------|----------------------------------|
| <b>T134-KIT</b> | Refill Kit for Elcometer 134 CSN |
|-----------------|----------------------------------|



## Elcometer 270

## Pinhole Detection Inspection Kit



The Elcometer 270 Pinhole Detector Inspection Kit utilises the wet sponge technique and has been designed to set a new standard for wet sponge detectors - a high quality, low voltage detector with similar accessories to a high voltage spark tester.

The Inspector's Kit does not include the main instrument; just add the model number to the order:

| Part Number | Description  |
|-------------|--|
| D270----3   | Elcometer 270/3 Pinhole Detector (9V & 90V)        |
| D270----4   | Elcometer 270/4 Pinhole Detector (9V, 67.5V & 90V) |

For more information see page 9-6.



## STANDARDS:

AS 3894.2, ASTM D 5162-A,  
ASTM G6, ASTM G62-A, BS 7793-2,  
ISO 8289-A, ISO 14654, JIS K 6766,  
NACE RP 0188, NACE SP 0188,  
NACE TM0384

## Technical Specification

| Part Number  | Description  |
|--------------|--|
| T27018191    | Elcometer 270 Pinhole Detector Inspection Kit  |
| Packing List | Separate wand handle & lead, roller wand, 10m (32') signal return cable, extension pieces, telescopic extension, belt clip, bottle of wetting agent, 3x AA batteries, spare flat sponge, spare roller sponge |

The kit does not include the main instrument; see page 9-6 for more information

## Accessories

|  |   |           |  |  |           |
|--|---|-----------|--|--|-----------|
|  | <b>Standard wand</b>  | T27016867 |  | <b>Roller sponge wand</b>  | T27016960 |
|  | A universal flat sponge to suit almost all applications   |           |  | Ideal for large flat surface inspection  |           |
|  | <b>Spare flat sponge set</b>  | T27018050 |  | <b>Spare roller sponge</b>   | T27018051 |
|  | Pack of 3 sponges;<br>150 x 60 x 25mm (6 x 2.3 x 1")  |           |  |  |           |
|  | <b>Separate wand adaptor</b>  | T27016999 |  | <b>Extension piece</b>   | T27016965 |
|  | with belt clip - converts the gauge into a separate pinhole detector  |           |  | 420mm (16.5") extensions to expand operators reach<br>Additional extension pieces can be connected to each other |           |
|  | <b>Telescopic wand adaptor</b>  | T27016998 |  | <b>Return cable - 4m (13')</b>   | T99916954 |
|  | with belt clip - extends to 1m (39"), ideal for floors or high areas  |           |  | supplied as standard, complete with crocodile clip and plug  |           |
|  | <b>Wetting agent</b>  | T27018024 |  | <b>Return cable - 10m (32')</b>  | T99916996 |
|  | 50ml (1.7floz) bottle - helps aid the fast detection of pinholes. Simply add to the water used to dampen the sponge |           |  | supplied on a drum, complete with clip and connection plug   |           |

Elcometer 280

Pulsed DC Holiday Detector Inspection Kit



The Elcometer 280 is a 'stick type' holiday detector which has been designed to make pulsed DC high voltage holiday detection safer, easier and more reliable than ever before.

Using state of the art electronics, the Elcometer 280 allows users to inspect coatings - without connecting the earth return lead to the component substrate - ideal for inspecting large surfaces and pipelines.

The Elcometer 280 uses the high voltage pulsed DC technique to detect holidays in coatings - even if the coating is damp, dirty or slightly conductive.

From the two stage safety switch, bright LED's and screen icons signifying when the high voltage is on, to the extended ribbing to protect the user from spark creep, the Elcometer 280 sets the standard for high voltage measurement safety.

For more information see pages 9-10.



**STANDARDS:**  
AS 3894.1, ANSI/AWWA C203, ANSI/AWWA C214, ASTM D4787, ASTM D5162, ISO 2746, ISO 29601, JIS G 3491, JIS G 3492, NACE RP0274, NACE SP0188, NACE SP0490, NACE TM0186, NACE TM0384

Technical Specification

| Part Number  | Description   |
|--------------|---|
| D280-T-KIT   | Elcometer 280 Pulsed DC Holiday Detector Inspection Kit   |
| Packing List | Elcometer 280 Pulsed DC Holiday Detector Gauge (Model T), 5m (16') trailing signal return lead, battery pack (2 supplied with Model T), battery charger with mains cables (UK, EUR & US), stainless steel rolling spring holder (supplied with Model T only), 250mm (9.8") probe extension shaft, shoulder strap and operating instructions - packed in a lightweight, rugged, wheeled transit case |

Accessories - For more information see pages 9-24 to 9-29



Band brush probes

See page 9-25



External 'C-type' wire brushes

See page 9-25



Right angled wire brush probes

See page 9-24




Right angled rubber probes

See page 9-25



Internal circular wire pipe brush probes

See page 9-24



Grounding mats

See page 9-29






The **Elcometer 224** provides the **very latest** in surface profile measuring technology for measuring profile on **either flat or curved surfaces**.



Elcometer®





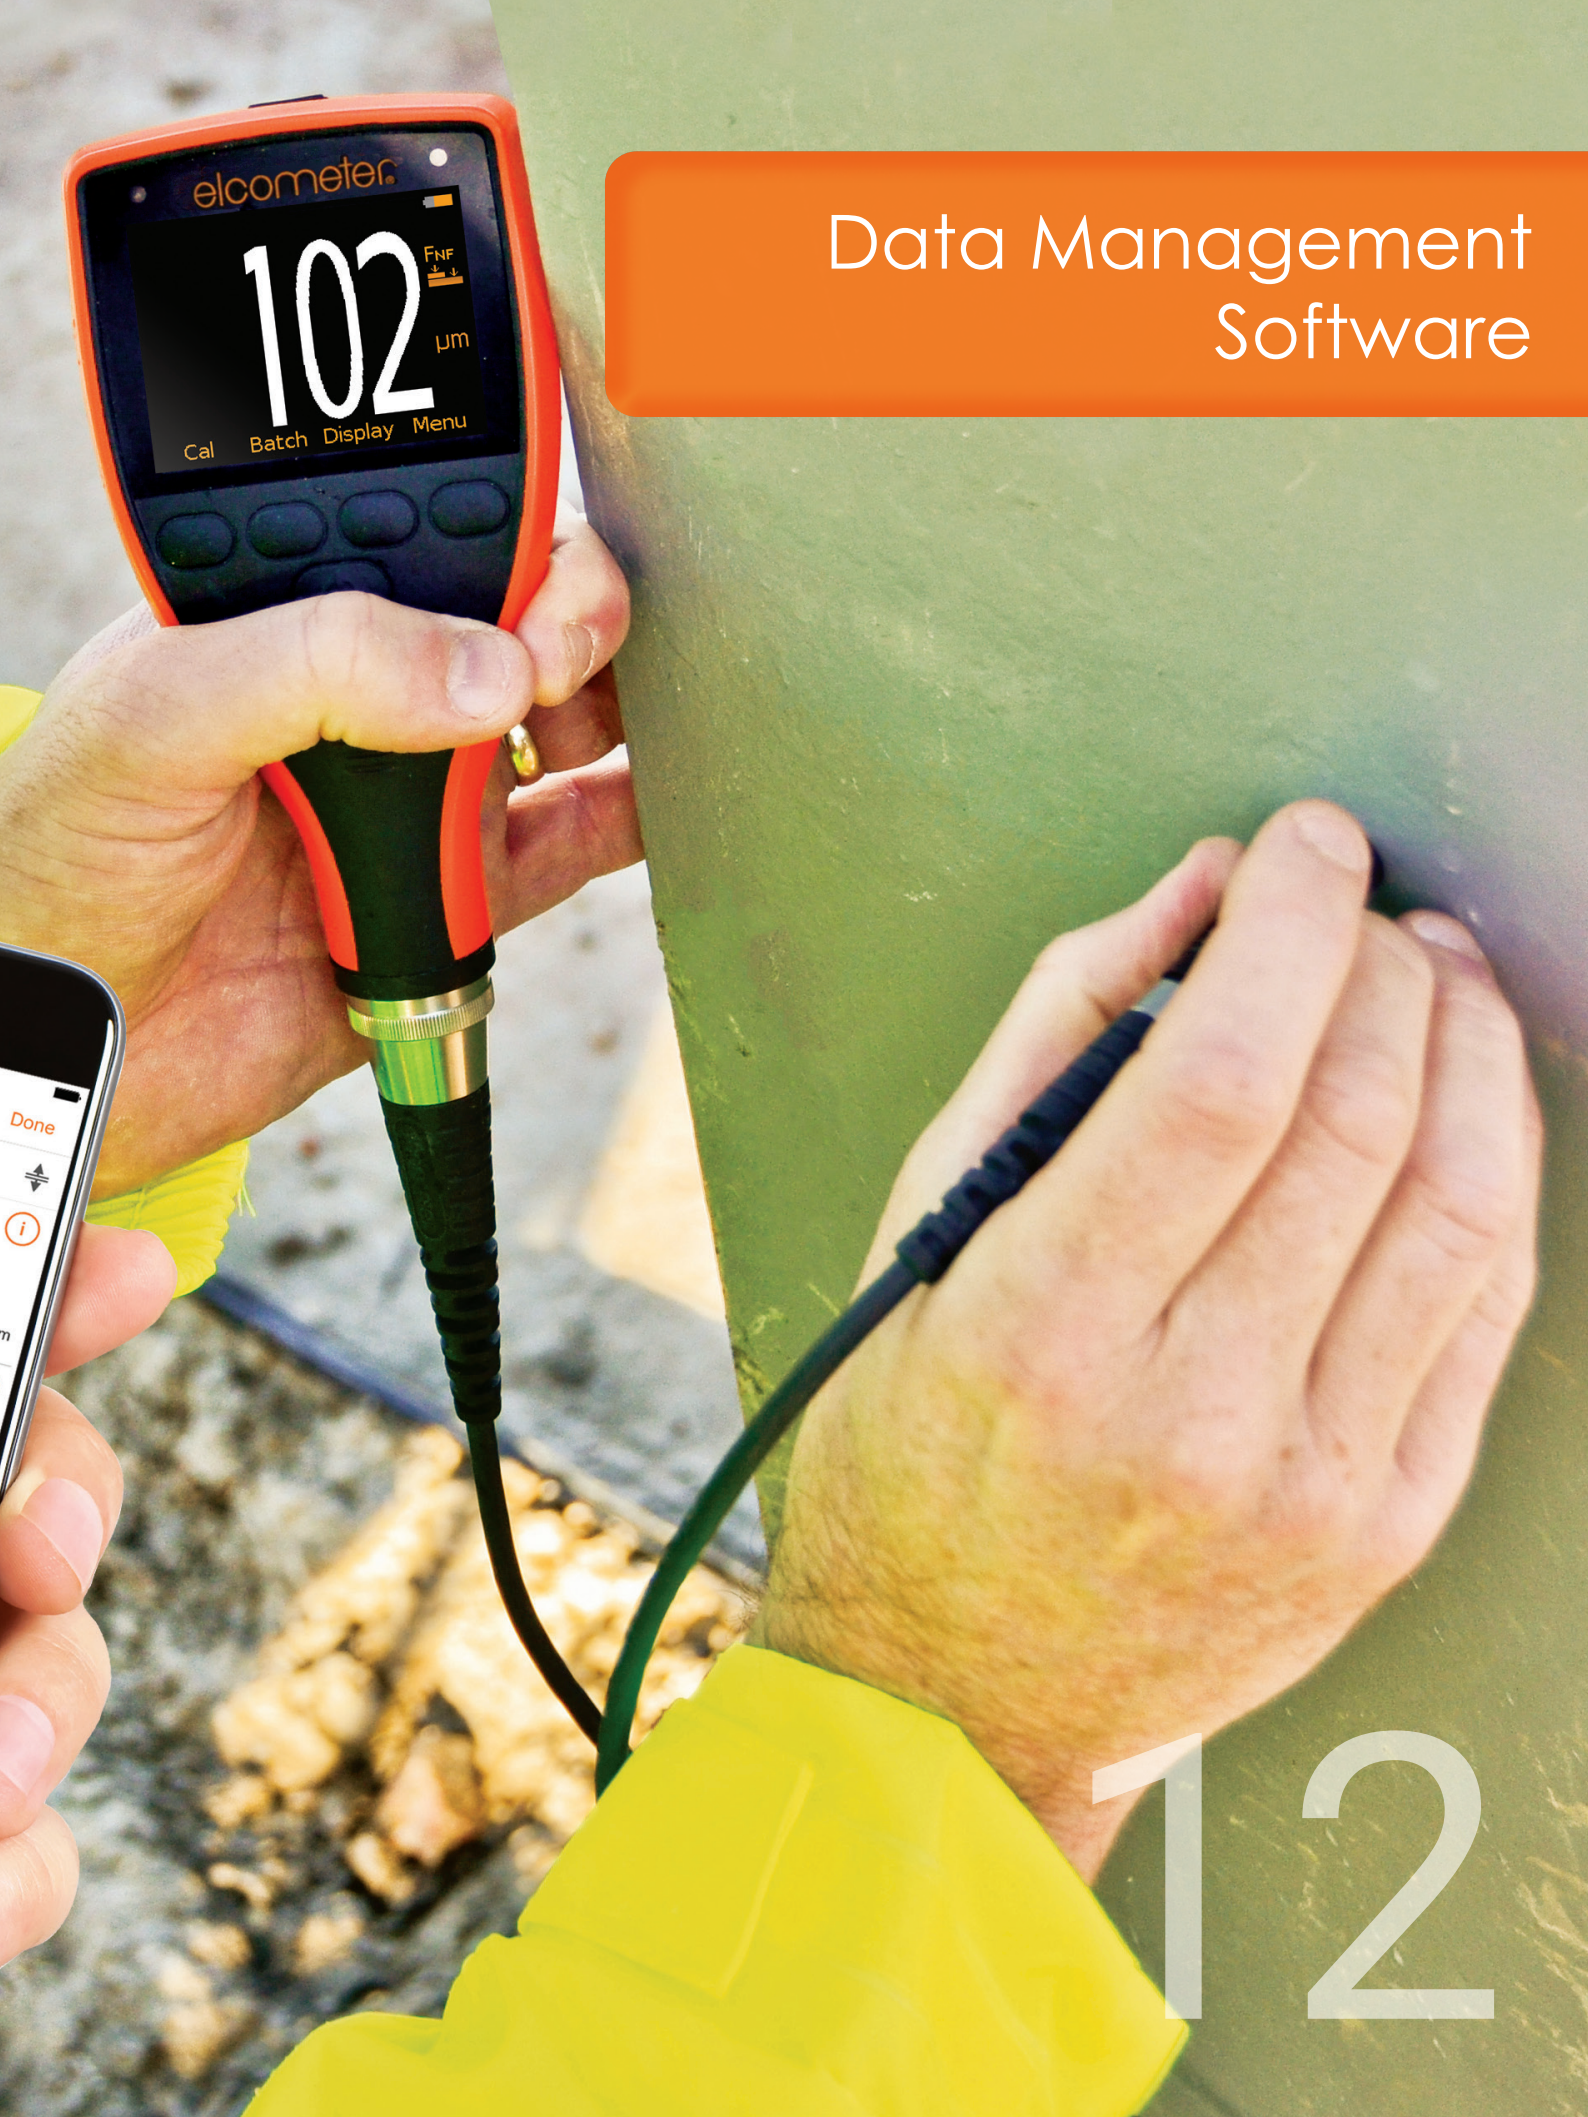

# Data Management Software

12



# ElcoMaster® - as easy as 1, 2, 3!

From inspection to professional reports at the click of a button.

## Take Readings

It's not all about taking readings, but what you do with the collected data that matters. ElcoMaster® Software is a fast, easy to use software and mobile app for all your data management, reporting and quality assurance needs.



2

## Send to ElcoMaster®

ElcoMaster® Software transfers measurement data direct from Elcometer's Bluetooth® or USB enabled inspection gauges direct to your PC, mobile or tablet.



All your measurement data in one place



Coating Thickness



Salt Contamination



It's not all about taking readings, it's what you do next that counts. Save up to 30% of your working week by producing professional inspection reports in seconds by using ElcoMaster® Software.

etv video available  
elcometer.tv


3

### Create Professional Inspection Report in Seconds

Inspectors can spend up to 30% of their working week producing reports. ElcoMaster® Software saves time and money by producing professional bespoke reports - even when out on site.



Climatic Conditions

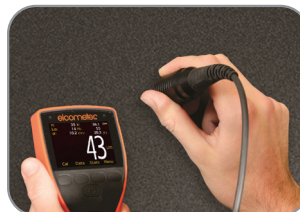

Surface Profile



Adhesion Testing

Professional reports in seconds even when out on site.  
The **ElcoMaster® Software App** puts the office in your pocket.



When out in the field or on site, you can review data instantly using our free ElcoMaster® Software Mobile App. Press 'Generate PDF' and watch the ElcoMaster® Software App produce a professional report instantly.

Email the report to your client seconds after you have finished inspecting or upload it via cloud technology so it can be accessed anywhere in the world.



### Email, print or send

Export, print, .pdf or email directly from ElcoMaster® Software at the press of a button.






### Easy to connect

Connect multiple gauges using Bluetooth® to download data from a gauge's memory or record live readings.



### Analyse

Analyse data and statistics, complete with measurement parameters such as adhesion pull-graphs and failure attributes or salt density maps instantly.

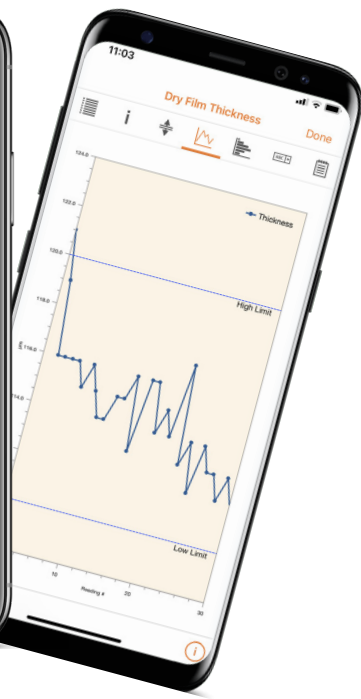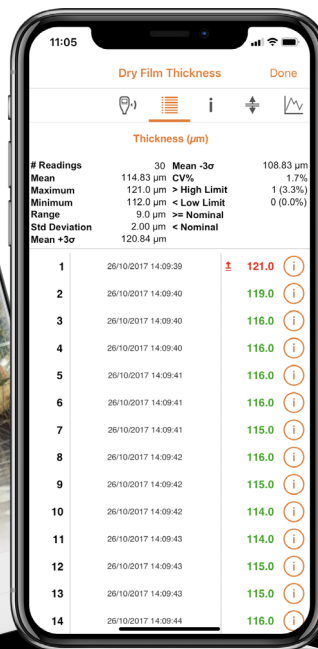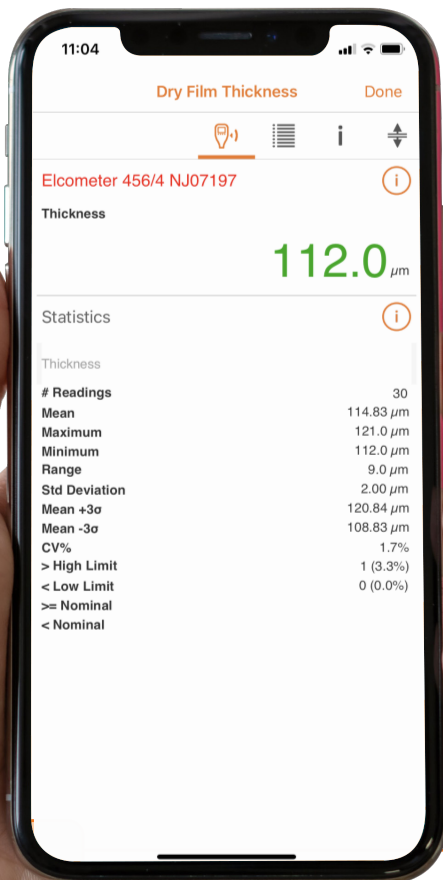



With data transferred to mobile communication devices, the Elcometer gauge does not have to be returned to the office for data download. Inspection work can continue without interruption.

## ElcoMaster®



### Easy to use

Store all project data, documents and reports in easy to manage folders.



### Live Readings & Statistics

Record each individual reading as it is taken and save it into batches. Ideal for gauges without an internal memory.



### Collection Templates

Using measurement location points on images or photos to indicate the position for the next reading.



### GPS

Store GPS locations in batches and view location on Google Maps.



### Add Photos & Notes

Take photos, add notes and comments.



### Combine


Combine multiple inspection parameters (DFT, climate, profile, adhesion & salt contamination) into bespoke reports.



Cloud



Email

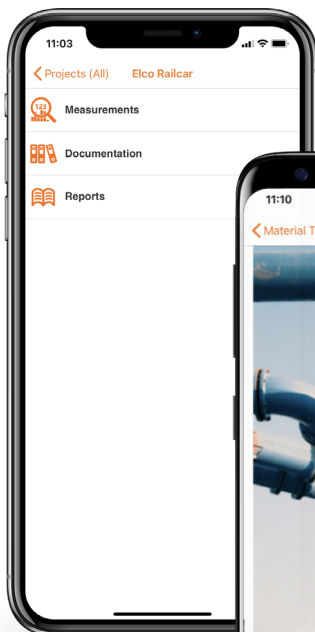



**ElcoMaster® Software** is the easy to use PC and mobile app for all your data management, reporting and quality assurance needs.

- No need to learn different software for different gauges, all Elcometer products use the same expert platform.
- Store data in a simple file tree, by project or by inspection type.
- Easy on screen analysis with histograms, statistics, measurements, limits, notes, diagrams and photographs.
- Export data direct to Microsoft Excel, .csv, .txt, Cqatk formats, etc., to save time and prevent keying in errors.
- Generate reports instantly using standard or pre-designed templates in seconds.
- No need for data manipulation, simply connect the gauge, download data and drag & drop.
- Combine multiple inspection parameters (such as DFT, profile, climate and adhesion) with images, notes and other project specific information in bespoke quality reports.
- Combine different inspection parameters to approve the final product.
- Using Cloud technology ElcoMaster® Software gives you real time quality control monitoring inspection projects in any location.



### Easy to connect multiple gauges

Connecting a gauge & downloading data (via Bluetooth® or USB) is fast and easy



### Easy to use

Store data in a simple file tree, by project and by inspection type



### Combine

Combine multiple inspection parameters (DFT, climate, profile, adhesion & salt contamination) into bespoke reports



## Products ElcoMaster® Software is compatible with:

Create reports by importing and combining measurements using Bluetooth® or USB from a wide range of Elcometer gauges, including;

- Surface Profile
- Climatic Conditions
- Coating Thickness
- Salt Contamination
- Adhesion Testing



### Email, print or send

Export, print, .pdf or email directly from ElcoMaster® Software at the click of a button



### Import existing reports

Scan your existing report into ElcoMaster® Software and drag & drop all your data where you want it, then simply save and print



### Built-in template

ElcoMaster® Software Library with FREE Report, Collection, Limit & Standards Templates



### Export direct

Export data direct to Microsoft Excel, .csv, .txt, cqtat formats, etc., to save time and prevent keying in errors



### Analyse

Analyse data using sequential readings, statistics, batches, charts, graphs, and histograms



### Live readings & statistics

Record each individual reading as it is taken and save it into batches. Ideal for gauges with no internal memory



### Add photos & notes

Add photographs and notes to your reports



From inspection site, to Cloud and Client in real time - the different ways **ElcoMaster® Software** can help you.

1

### Transfer your readings



Transfer your inspection data to Microsoft Excel or ElcoMaster® Software via Bluetooth® or USB to create professional reports at the click of a button.

3

### Upload to a cloud


Using ElcoMaster® Software Mobile App, upload inspection data, photos, notes and GPS coordinates to a Cloud account of your choice via 3G/4G or WiFi.




All data is instantly visible to other approved users of the cloud account - through a secure log-in on any computer or mobile device anywhere in the world.

2

### Transfer from site to office

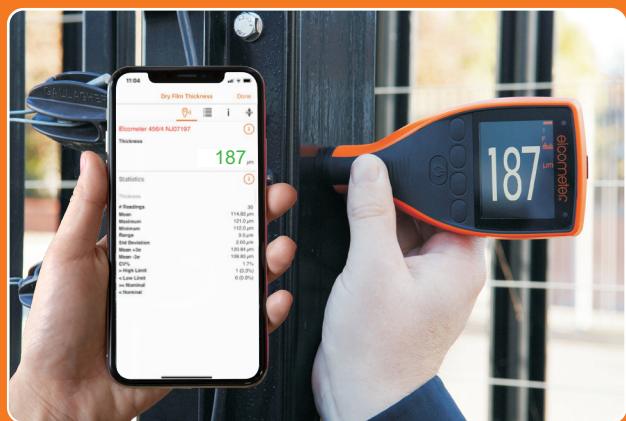

Instantly transfer inspection data to your smartphone or tablet via Bluetooth®. Then send your data via email or convert to pdf and print.

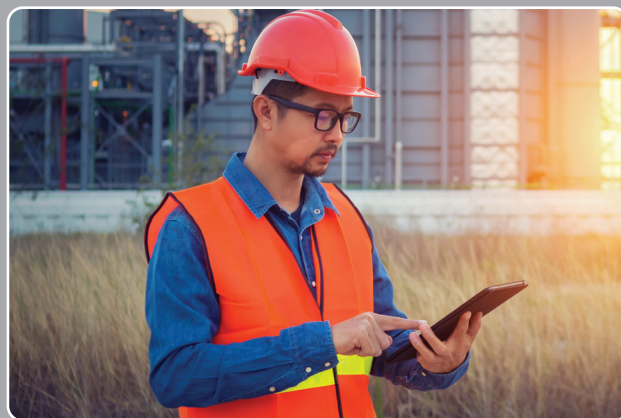

Compare and combine inspection data from different production lines or different locations, to produce specific Project Inspection Reports quickly and easily.



4

## Real time collaboration for multi-site projects



**When working with manufacturers of sub-assemblies across the globe ElcoMaster® Software can collate all inspection data from each site, assembly line and project into one shared location.**

Contractors can then:

- Accept or reject parts before shipment from sub-assembly plants.
- Combine all data from sub-assembly and final assembly inspection to generate Project Inspection Reports for quality management, both during the project and after completion of the project.
- Have real time in-progress visibility across the whole project, no matter where the sub-assembly manufacturing is in the world.
- Improve efficiency and quality throughout the production process.

### Real time communication

Add comments to inspection data, projects and files or instantly message your colleagues, managers or clients to immediately discuss key points, send work instructions and store messages within the project file.

### Your data - your choice - your control

Using your preferred Cloud service provider, make your data secure allowing only approved users to have access. ElcoMaster® Software Mobile App is compatible with a range of cloud service providers and FTP servers.







The background of the page is a photograph of a concrete structure under construction. Several vertical rebar rods are visible, some of which are encased in concrete. The rebar is made of steel and has a ribbed texture. The concrete is a light gray color. The overall scene is a construction site.

# Concrete Inspection & Metal Detection

Test Hammer

13-6

Cover Meters & Half Cell Meters

13-8

Moisture Meters

13-22

Metal Detection

13-26

13





**A covermeter, or rebar locator, is a gauge that measures the thickness of concrete cover over steel reinforcement bars and metal pipes. The covermeter can tell you the depth of the rebar, the location and orientation of reinforcement bar (rebar) and determine the diameter of the rebar.**

## Concrete Inspection

Test hammers are used to determine the surface hardness of concrete and are one of the most widely used instruments to assess concrete compressive strength. It is the quickest, simplest and least expensive method to obtain an estimate of the quality and strength of the concrete.

When corrosion occurs to rebar or steel structures within concrete the ferric oxide protective layer surrounding the rebar breaks down allowing an electrochemical reaction between the steel and the concrete. Half-cell meters accurately measure the condition and potential corrosion of rebars and steel structures within concrete.

A rebar locator is used to determine the presence and orientation of steel reinforcement rebars under the surface of the concrete. A contractor engaged in maintenance work will be familiar with the problem of accurately locating the exact position of rebar, wall ties, studs and other metal fasteners. These low cost, simple to use gauges can meet their everyday requirements.

Many concrete structures have a protective or cosmetic coating. Premature failure of this coating can, at the very least, result in additional costs of rework. Adhesion tests verify that both surface preparation and coating application are within specification.

Concrete structures are porous and will absorb moisture, our range of moisture meters and climate monitoring gauges allows moisture content to be measured.

The range also includes gauges used for the measurement of crack width in concrete and other structures.

## Metal Detection

The Elcometer Metal Detection range includes Valve Box Locators that are rugged and simple to use making them the ideal choice for all location work in all types of terrain.

# Choose the correct gauge for your concrete inspection or metal detection

## Test Hammer

- Quick, simple and inexpensive method for the evaluation of concrete compression strength and other masonry materials
- One of the most widely used instruments in the field of non-destructive testing



## Cover Meters & Half Cell Meters



- Measures the thickness of concrete cover over steel reinforcement bars and metal pipes
- Can tell you the depth of the rebar, the location and orientation of rebar and determine the diameter of the rebar

## Moisture Meters

- A non-invasive probe emits a radio frequency to penetrate the surface to detect moisture
- Ideal for rapid surveys of solid wall, floors and ceramic tiles



## Metal Detection

- Detecting metal objects to a maximum depth of 1m (39.4")
- Originally designed to accurately locate valve boxes and manhole covers







A photograph of concrete steps and a wall, serving as the background for the page. The concrete is light gray with some darker spots and shadows.

# Concrete Inspection & Metal Detection

Test Hammer

13-6

Cover Meters & Half Cell Meters

13-8

Moisture Meters

13-22

Metal Detection

13-26

13



## Elcometer 181

## Analogue Concrete Test Hammer



The concrete test hammer provides a quick, simple and inexpensive method for non-destructive evaluation of concrete compression strength and other masonry materials. Concrete test hammers are one of the most widely used instruments in the field of non-destructive testing.

This gauge consists of a spring loaded plunger which, when released, strikes the surface with fixed and constant impact energy. During the rebound stroke, the weight moves a pointer that indicates the maximum point of return and at the same time indicates a reference value called Rebound Number.

This number, converted by the correlations available on the hammer, gives the compression resistance value in respect of the impact angle.

### Key Features:

- Impact Energy 2.207Nm
- Supplied with grinding stone to prepare test surface
- Aluminium body
- Rebound value indicated on test hammer
- Rebound value chart on body, for quick calculation of compressive strength
- Curve selection on chart dependant on testing angle

### STANDARDS:

ASTM C805, BS 1881:202, DIN 1048,  
EN 12504-2, ISO 8045, NFP18-417,  
UNI 9189

### Technical Specification

| Part Number       | Description   | Certificate |
|-------------------|---|-------------|
| <b>W181----</b> 1 | Elcometer 181 Analogue Concrete Test Hammer - MPa / psi scale   | ○           |
| Accuracy          | Better than $\pm 2$ Rebound Number (When tested on Calibration Anvil at 80)                                     |             |
| Resolution        | 2 Rebound Number(s)   |             |
| Range             | 10 to 100 Rebound Number(s)   |             |
| Dimensions        | Hammer: 280mm (11.02") length x 55mm (2.17") diameter<br>In Case: 350mm (13.78") length x 80mm (3.15") diameter |             |
| Weight            | 1.5kg (3.3lb) with case   |             |
| Packing List      | Elcometer 181 analogue concrete test hammer, plastic storage case, abrasive stone & operating instructions      |             |

### Accessories

|                   |   |
|-------------------|---|
| <b>TW99919563</b> | Calibration Anvil (supplied complete with Test Certificate) |
|-------------------|---|

○ Optional Calibration Certificate available.



# Concrete Inspection & Metal Detection

Test Hammer

13-6

Cover Meters & Half Cell Meters

13-8

Moisture Meters

13-22

Metal Detection

13-26

# 13



**Elcometer 331HM**

**Half-Cell Meter**

The rugged **Elcometer 331HM** half-cell meters measure the condition and potential corrosion of rebars and steel structures within concrete.

Single handed operation: all functions can be accessed & controlled through 4 simple keys/buttons

Interchangeable Half-Cell probes are available (see page 13-18)

**STANDARDS:**

ASTM C876-91, DGZfP:B3,  
Concrete Society Technical Report 60,  
UNI 10174

Measures the condition and potential corrosion of rebars and steel structures within concrete quickly

Memory and data logging with data output to PC

Up to 240,000 readings can be stored on the gauge for detailed reporting

Links to CoverMaster™ software



**How does a Half-Cell Meter work?**

When corrosion occurs the ferric oxide protective layer surrounding the concrete breaks down allowing an electrochemical reaction between the steel and the concrete.

In the half-cell test, a reference electrode is passed over the surface of the concrete and the potential voltage difference is recorded. These potential voltage readings show where corrosion is likely to be, or is currently present.


Elcometer 331HM Half-Cell Meter is supplied with memory and allows users to store up to 240,000 readings in either linear or grid batches.

**Elcometer 331HM****Half-Cell Meter****Product Features**


| Description  | Elcometer 331HM                                  |
|--|--|
| Model  | HM   |
| Part Number  | W331HM--4  |
| Half-Cell measurement  | ■  |
| Large graphic display with backlight   | ■  |
| Multiple language menu structure   | ■  |
| Rugged waterproof case (IP65)  | ■  |
| Adjustable beep volume & earphone socket   | ■  |
| CoverMaster™ software  | ■  |
| Statistics   | ■  |
| Number of readings ( $\eta$ ), Mean (average) ( $\bar{x}$ )                              | ■  |
| Standard deviation ( $\sigma$ ), Coefficient of variation (CV%)                          | ■  |
| Lowest reading ( $\downarrow$ ), Highest Reading ( $\uparrow$ )                          | ■  |
| Under range ( $<<$ )   | ■  |
| Low Limit ( $\nabla$ or $<$ ), Within Limit ( $\pm$ ), High Limit ( $\triangle$ or $>$ ) | ■  |
| Over range ( $\infty$ )  | ■  |
| Blank readings (□)   | ■  |
| Date & Time  | ■  |
| Memory   | ■  |
| Linear batch memory  | Up to 200 batches of 1,000 readings <sup>1</sup> |
| Grid batch memory  | Up to 240,000 readings <sup>1</sup>              |
| Graphics plot  | ■  |
| Threshold plot   | ■  |

**Technical Specification**

|                           |   |          |               |
|---------------------------|---|----------|---------------|
| Range                     | -999mV to +999mV  | Accuracy | ±5mV          |
| Operating temperature     | 0 to 50°C (32 to 120°F)   |          |               |
| Power supply              | 7.4V battery pack provides up to 32 hours of continuous use (20 hours if backlight is on). Rechargeable in 4 hours, using an external charger, either inside or outside the gauge.  |          |               |
| Dimensions                | 230 x 130 x 125mm (9 x 5.1 x 4.9")  | Weight   | 1.6kg (3.5lb) |
| Packing List <sup>2</sup> | Elcometer 331HM Half Cell Meter, 25m extension cable on spool, 1.7m red rebar connecting cable with connecting clip, 1.7m black half-cell connecting cable, rechargeable battery pack & charger (UK, US & EU), earphone, shoulder strap, plastic carry case, operating instructions, CoverMaster™ software & PC cable |          |               |

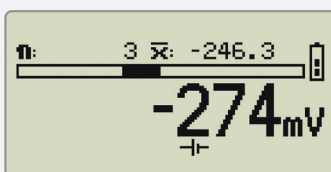**Displays**


Reading Screen  
with Statistics

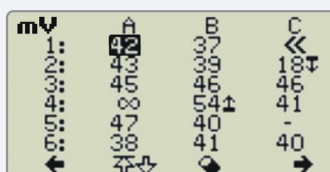

Grid Batch feature facilitates  
fast surveying for Half-Cell  
readings



Graphics plot  
Allows an immediate visual  
indication of results

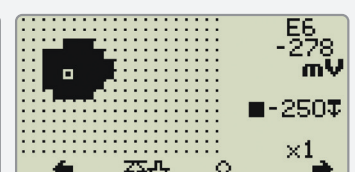

Threshold plot for a quick  
pass or fail analysis

<sup>1</sup> Linear Batch Mode: up to 200 batches of 1,000 readings each. Grid Batch Mode: up to 1,000 batches, maximum number of readings: 240,000

<sup>2</sup> Search Heads and Half-Cell Probes are not included as standard and must be ordered separately, see page 13-18



## Elcometer 331B

## Covermeter

The easy to use **Elcometer 331B** covermeter quickly and accurately locates/orientates reinforcement bars in concrete and measures the depth of cover over the rebar.



Locate and determine orientation of rebar quickly, easily & accurately

Single handed operation: All functions can be accessed & controlled through 4 simple keys/buttons

International bar sizes:  
User selectable bar sizes: Metric, Imperial, ASTM/Canadian and Japanese

Range of fully interchangeable search heads (see page 13-18)

### STANDARDS:

ACI 318, ASTM C876-91, BS1881:201, BS1881:204, BS8110, CP 110, DGZfP:B2, DGZfP:B3, DIN 1045, EC2, SIA 262, SS-EN 206, UNI 10174, Concrete Society Technical Report 60,

### How does a Covermeter work?

To identify the location and orientation of the rebar under the surface of the concrete, a search head is connected to the Covermeter and is used to scan across the designated search area of the concrete.

When the search head approaches a reinforcement bar, the LED on the search head will start to glow. The Covermeter will start to emit a sound which will increase in pitch and the signal strength indicator bar on the display will increase in length.

When the bar is positioned below the centre of the search head then the pitch of the sound will be at its highest and the depth of cover will be shown on the Covermeter display. The signal strength indicator bar is at its maximum.

If the reinforcement bar is too deep to measure, the depth of cover will be displayed as infinite.

The Elcometer 331B Covermeter is an entry level gauge without memory that is only used to quickly locate and measure the depth of cover over the rebar.

**Elcometer 331B****Covermeter****Interchangeable Search Heads & Borehole Probes**

A range of fully interchangeable search heads and borehole probes are available to suit the requirements without the need to return your gauge to Elcometer.

There are four types of search heads available for use with the Elcometer 331B; Standard, Narrow Pitch, Deep Cover and Borehole.

The Standard Search Head is designed to meet most of the measurement requirements whereas the Narrow Pitch Search Head accurately measures the cover thickness when the gaps (pitch) between each of the rebars are close together.

The Deep Cover Search Head is ideal for accurately measuring rebars that are deep within the structure. The Borehole Probe is ideal for locating tendon ducts and multiple layers of rebar lying deep within the concrete.

Changing from one type of search head to another is quick and easy; simply switch off the Covermeter, swap search heads, switch on again and zero the Covermeter.

For full details on search heads please see page 13-18.

**Product Features**

| Description   | Elcometer 331B |
|---|----------------|
| Model   | B              |
| Part Number   | W331B---4      |
| Covermeter/rebar location                                 | ■              |
| Rebar orientation   | ■              |
| Depth of cover  | ■              |
| Large cover (thickness) reading mm or inches              | ■              |
| Large graphic display with backlight                      | ■              |
| Multiple language menu structure                          | ■              |
| Signal strength bar                                       | ■              |
| Interchangeable heads with LED & keypad                   | ■              |
| User selectable bar range sizes & numbers                 | ■              |
| Rugged waterproof case (IP65)                             | ■              |
| Adjustable beep volume & earphone socket                  | ■              |
| Measurement sound modes                                   |                |
| Locate ( <i>tone increases as head approaches rebar</i> ) | ■              |

**Technical Specification**

|                       |   |
|-----------------------|---|
| Operating temperature | 0 to 50°C (32 to 120°F)   |
| Power supply          | 7.4V battery pack provides up to 32 hours of continuous use (20 hours if backlight is on). Rechargeable in 4 hours, using an external charger, either inside or outside the gauge.                        |
| Dimensions            | 230 x 130 x 125mm (9 x 5.1 x 4.9")      Weight   1.6kg (3.5lb)  |
| Packing List          | Elcometer 331B Covermeter, standard search head & search head connecting cable, rechargeable battery pack & charger (UK, US & EU), earphone, shoulder strap, plastic carry case & operating instructions. |



### Elcometer 331

### Covermeters & Half-Cell Meters

The **Elcometer 331** is an all in one gauge that combines the rebar locator, concrete covermeter and half-cell measurement, making site visits quicker and more convenient.

Locate and determine orientation of rebar quickly, easily & accurately in Cover Mode

Measures the condition and potential corrosion of rebars and steel structures within concrete quickly in Half-Cell Mode

Up to 240,000 readings can be stored on the gauge for detailed reporting

Single handed operation: all functions can be accessed & controlled easily through 4 keys/buttons

Memory and data logging with data output to PC

Links to CoverMaster™ software

International bar sizes: user selectable bar sizes: Metric, Imperial, ASTM/Canadian and Japanese Available in Cover Mode

Full range of interchangeable search heads, borehole probe & half-cell probes available to suit the requirements (see page 13-18)

#### STANDARDS:

ACI 318, ASTM C876-91, BS1881:201, BS1881:204, BS8110, CP 110, DGZfP:B2, DGZfP:B3, DIN 1045, EC2, SIA 262, SS-EN 206, Concrete Society Technical Report 60, UNI 10174












**Elcometer 331****Covermeters & Half-Cell Meters****Interchangeable Search Heads, Borehole Probes & Half-Cell Probes**

A range of fully interchangeable search heads, borehole probes and half-cell probes are available to suit the requirements without the need to return your gauge to Elcometer.

Changing from one search head to another is quick and easy; simply switch off the Covermeter, swap search heads, switch on again and zero the Covermeter.

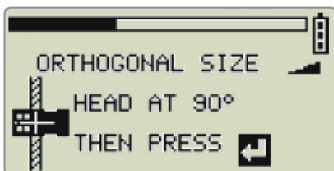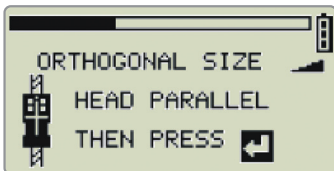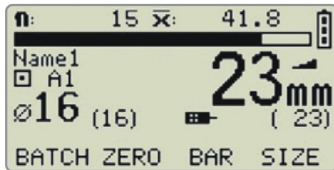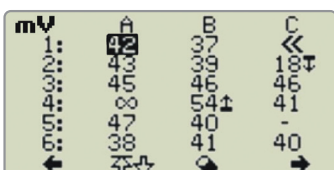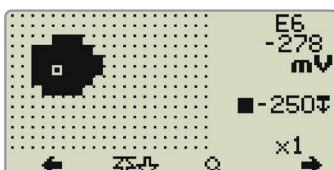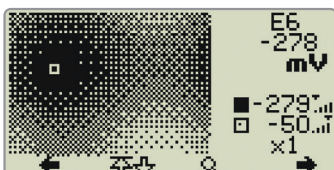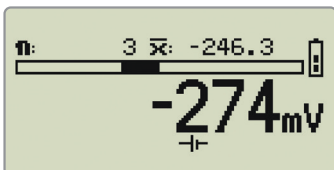**Cover Mode Displays****Half-Cell Mode Displays****Standard Search Head**

- Designed to meet most measurement requirements

**Narrow Pitch Search Head**

- Accurately measures the cover thickness when the gaps (pitch) between each of the rebars are close together

**Deep Cover Search Head**

- Ideal for accurately measuring rebars that are deep within the structure

**Dual Search Head**

- Designed to locate high tensile steel & stainless steels

**Borehole Probe**

- Ideal for accurately measuring rebars that are deep within the structure

**Half-Cell Kit**

- Consists of either a copper electrode in a copper sulphate solution or a silver electrode in a sodium chloride solution
- Each half cell is a sealed unit - no need to mix chemicals
- Supplied with a 25m/80ft cable
- Every half-cell probe is guaranteed for 5 years





## Elcometer 331

## Covermeters &amp; Half-Cell Meters

## Product Features

| Description   | Covermeter & Half Cell |  |   |   |
|---|------------------------|--|---|---|
|   | BH                     | SH                                       | TH  | THD   |
| Model   | W331BH--4              | W331SH--4                                | W331TH--4   | W331THD-4   |
| Part Number   |                        |  |   |   |
| Covermeter  | ■                      | ■  | ■   | ■   |
| Half-Cell measurement   | ■                      | ■  | ■   | ■   |
| Rebar orientation   | ■                      | ■  | ■   | ■   |
| Depth of cover  | ■                      | ■  | ■   | ■   |
| Large cover (thickness) reading mm or inches                                  | ■                      | ■  | ■   | ■   |
| Large graphic display with backlight  | ■                      | ■  | ■   | ■   |
| Multiple language menu structure  | ■                      | ■  | ■   | ■   |
| Signal strength bar   | ■                      | ■  | ■   | ■   |
| Interchangeable heads with LED & keypad                                       | ■                      | ■  | ■   | ■   |
| User selectable bar range sizes & numbers                                     | ■                      | ■  | ■   | ■   |
| Rugged waterproof case (IP65)   | ■                      | ■  | ■   | ■   |
| Adjustable beep volume & earphone socket                                      | ■                      | ■  | ■   | ■   |
| Measurement Sound Modes   |                        |  |   |   |
| Locate ( <i>tone increases as head approaches rebar</i> )                     | ■                      | ■  | ■   | ■   |
| Under Cover ( <i>tone only sound for low cover</i> )                          |                        | ■  | ■   | ■   |
| Maxpip™ ( <i>tone only as head passes rebar centre</i> )                      |                        | ■  | ■   | ■   |
| Large half cell reading mV  | ■                      | ■  | ■   | ■   |
| Automatic bar size estimate   |                        | ■  | ■   | ■   |
| Orthogonal bar size calculation   |                        | ■  | ■   | ■   |
| RS232 Output - direct to printer or PC  |                        | ■  | ■   | ■   |
| CoverMaster™ software   |                        | ■  | ■   | ■   |
| Statistics  |                        | ■  | ■   | ■   |
| Number of readings ( $\eta$ )   |                        | ■  | ■   | ■   |
| Mean (average) ( $\bar{x}$ )  |                        | ■  | ■   | ■   |
| Standard deviation ( $\sigma$ )   |                        | ■  | ■   | ■   |
| Coefficient of variation (CV%)  |                        | ■  | ■   | ■   |
| Lowest reading ( $\min$ ), Highest Reading ( $\max$ )                         |                        | ■  | ■   | ■   |
| Under range (<), Over range ( $\infty$ )                                      |                        | ■  | ■   | ■   |
| Low Limit ( $\nabla$ or <), Within Limit (††), High Limit ( $\triangle$ or >) |                        | ■  | ■   | ■   |
| Blank readings( $\square$ )   |                        | ■  | ■   | ■   |
| Minimum & maximum cover limits  |                        | ■  | ■   | ■   |
| Date & Time   |                        | ■  | ■   | ■   |
| Memory  |                        | ■  | ■   | ■   |
| Linear batch memory   |                        | 10 linear batches of 1,000 readings each | Up to 200 batches of 1,000 readings*<br>Up to 240,000 readings* | Up to 200 batches of 1,000 readings*<br>Up to 240,000 readings* |
| Grid batch memory   |                        |  |   |   |
| User customised batch size  |                        |  | ■   | ■   |
| Graphics plot   |                        |  | ■   | ■   |
| Threshold plot  |                        |  | ■   | ■   |
| Stainless Steel Measurement Mode  |                        |  |   | ■   |

\* Linear Batch Mode: up to 200 batches of 1,000 readings each Grid Batch Mode: up to 1,000 batches, maximum number of readings: 240,000

**Elcometer 331****Covermeters & Half-Cell Meters****Technical Specification**

|                       |   |          |               |
|-----------------------|---|----------|---------------|
| Range                 | -999mV to +999mV  | Accuracy | ±5mV          |
| Operating temperature | 0 to 50°C (32 to 120°F)   |          |               |
| Power supply          | 7.4V battery pack provides up to 32 hours of continuous use (20 hours if backlight is on). Rechargeable in 4 hours, using an external charger, either inside or outside the gauge.  |          |               |
| Dimensions            | 230 x 130 x 125mm (9 x 5.1 x 4.9")  | Weight   | 1.6kg (3.5lb) |
| Packing List:         | Elcometer 331 Covermeter & Half-Cell Meter, half-cell & search head connecting cable, rechargeable battery pack & charger (UK, US & EU), earphone, shoulder strap, plastic carry case, operating instructions, CoverMaster™ software (SH, TH & THD) & PC cable (SH, TH & THD) |          |               |

**Cover Mode and Half-Cell Mode**

This all in one gauge combines the rebar locator, concrete covermeter and half-cell measurement, which allows the user to easily switch from Cover Mode to Half-Cell Mode depending on the type of measurement required on site.

**Cover Mode:** Measures the depth of cover over the rebar, detecting the location, orientation and depth of the rebar under the surface of the concrete using either a Standard, Narrow Pitch, Deep Cover, Dual Search Head or a Borehole Probe.

**Half-Cell Mode:** Measures the condition and potential corrosion of rebars and steel structures within the concrete using either a copper electrode in a copper sulphate solution or a silver electrode in a silver chloride solution.

The Elcometer 331 Covermeter and Half-Cell meter is available in four models - Model BH, SH, TH and THD.

Elcometer 331 Model BH: entry level gauge without memory.

Elcometer 331 Model SH: intermediate level gauge supplied with memory and allows users to store up to 1,000 readings in linear batches.

Elcometer 331 Model TH: supplied with memory and allows users to store up to 240,000 readings in either linear or grid batches.

Elcometer 331 Model THD: supplied with memory and allows users to store up to 240,000 readings in either linear or grid batches. Also able to detect stainless steel reinforcement bars.



## Elcometer 331

## Covermeters & Half-Cell

### Bar Size Dimensions available on the Elcometer 331 Models B, BH, SH, TH & THD in Cover Mode

The bar size can be selected when using a Covermeter only or the Covermeter & Half-Cell meter in Cover Mode. Dimensions of reinforcement bars are stored in the Elcometer 331 Models B, BH, SH, TH & THD and includes the following four standards bar series: Metric, US Bar, ASTM/Canadian and Japanese. Due to this wide selection of bar sizing, the Elcometer 331 Covermeters can be utilised worldwide with accurate results.

When taking measurements for high tensile steel or Grades 304, 316 and Duplex Stainless Steel using the Elcometer 331 Model THD, details for the Bar Grade and Bar Size can be manually input into the covermeter, alternatively the gauge can be used in Autosizing Mode.

| Metric   |            | Imperial |              | ASTM/Canadian |                          | Japanese |            |
|----------|------------|----------|--------------|---------------|--------------------------|----------|------------|
| Bar Size | Diam. (mm) | Bar Size | Diam. (Inch) | Bar Size      | Diam. (mm <sup>2</sup> ) | Bar Size | Diam. (mm) |
| 5        | 5          | #2       | 0.250        | 10M           | 100                      | 6        | 6          |
| 5.5      | 5.5        | #3       | 0.375        | 15M           | 200                      | 10       | 10         |
| 6        | 6          | #4       | 0.500        | 20M           | 300                      | 13       | 13         |
| 7        | 7          | #5       | 0.625        | 25M           | 500                      | 16       | 16         |
| 8        | 8          | #6       | 0.750        | 30M           | 700                      | 19       | 19         |
| 9        | 9          | #7       | 0.875        | 35M           | 1000                     | 22       | 22         |
| 10       | 10         | #8       | 1.000        | 45M           | 1500                     | 25       | 25         |
| 11       | 11         | #9       | 1.125        | 55M           | 2500                     | 29       | 29         |
| 12       | 12         | #10      | 1.250        |               |                          | 32       | 32         |
| 14       | 14         | #11      | 1.375        |               |                          | 35       | 35         |
| 16       | 16         | #12      | 1.500        |               |                          | 38       | 38         |
| 18       | 18         | #13      | 1.625        |               |                          | 41       | 41         |
| 20       | 20         | #14      | 1.750        |               |                          | 44       | 44         |
| 22       | 22         | #15      | 1.875        |               |                          | 48       | 48         |
| 25       | 25         | #16      | 2.000        |               |                          | 51       | 51         |
| 28       | 28         | #18      | 2.250        |               |                          | 57       | 57         |
| 32       | 32         |          |              |               |                          |          |            |
| 36       | 36         |          |              |               |                          |          |            |
| 40       | 40         |          |              |               |                          |          |            |
| 44       | 44         |          |              |               |                          |          |            |
| 50       | 50         |          |              |               |                          |          |            |

**Elcometer 331****CoverMaster™ Software**

Elcometer's CoverMaster™ software will manage your data efficiently and effectively.

Available with the Elcometer 331 Models HM, SH, TH & THD.

Data is transferred quickly into the CoverMaster™ software data management system via RS232 connection.




Both Covermeter and Half-Cell readings can be stored together with associated photos, Word documents, Excel spreadsheets and other files.



CoverMaster™ software is supplied free of charge with all Elcometer 331 models that have batch data storage.

**Features:**

- Data easily translated into a typographic view giving you all the information you need at a glance
- Data for each reading can be presented in colour or can be shown in greyscale, complete with reading values in each grid
- Site survey data from both cover and half cell measurements can be shown on the same typographic (or gradient) chart
- Reports can be fully customised allowing corporate logos, photos and memos to be added providing a fully comprehensive report for clients
- All survey information in one place, CoverMaster™ links directly with Excel, Word and PowerPoint files, it is simple to analyse and assess your results
- CoverMaster™ - one platform for the storage of data, notes, photos, PDF files for the creation of comprehensive reports

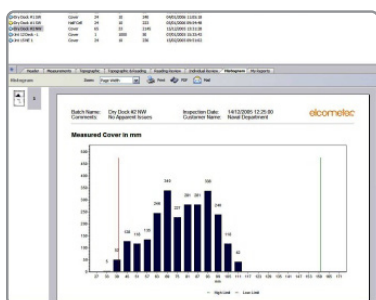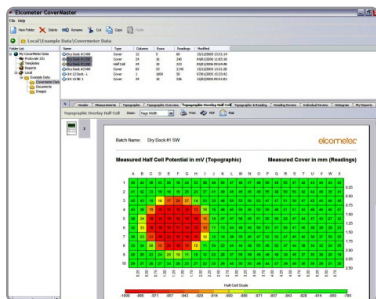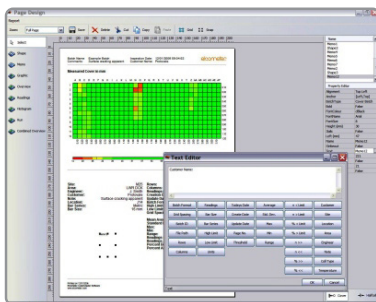



## Elcometer 331

## Accessories

For the Elcometer 331 BH, SH, TH and THD models, all search heads, the borehole probe and half-cell probes are fully interchangeable there is no requirement to return your gauge to Elcometer.

Elcometer 331 SH, TH and THD models are also supplied with CoverMaster™ & EDTS Excel link transfer software and PC Cable.

The Elcometer 331 Model B does not have half-cell capability and cannot be used with the half-cell probes listed below.



### Standard Search Head

Designed to meet most of your measurement requirements.

|             |  |
|-------------|--|
| Part Number | <b>TW33119124-1A</b>   |
| Range       | 40mm / 1.6" bar 15mm to 95mm / 0.6" to 3.75"<br>8mm / 0.3" bar 8mm to 70mm / 0.3" to 2.75" |

|              |                                     |
|--------------|-------------------------------------|
| Dimensions   | 155 x 88 x 42mm / 6.1 x 3.5 x 1.65" |
| Sensing area | 120 x 60mm / 4.72 x 2.36"           |



### Narrow Pitch Search Head

Accurately measures the cover thickness when the gaps (pitch) between each of the rebars are close together.

|             |   |
|-------------|---|
| Part Number | <b>TW33119124-2A</b>  |
| Range       | 40mm / 1.6" bar 8mm to 80mm / 0.3" to 3.1"<br>8mm / 0.3" bar 5mm to 60mm / 0.2" to 2.4" |

|              |                                     |
|--------------|-------------------------------------|
| Dimensions   | 155 x 88 x 42mm / 6.1 x 3.5 x 1.65" |
| Sensing area | 120 x 60mm / 4.72 x 2.36"           |



### Deep Cover Search Head

The ideal search head for accurately measuring rebars that are deep within the structure.

|             |   |
|-------------|---|
| Part Number | <b>TW33119171A</b>  |
| Range       | 40mm / 1.6" bar 35mm to 180mm / 1.4" to 7"<br>8mm / 0.3" bar 25mm to 160mm / 1" to 6.3" |

|              |                                    |
|--------------|------------------------------------|
| Dimensions   | 170 x 94 x 54mm / 6.7 x 3.7 x 2.1" |
| Sensing area | 160 x 80mm / 6.3 x 3.15"           |



### Dual Search Head for high tensile and stainless steels

The search head is designed to locate High Tensile and Stainless Steel.

|             |   |
|-------------|---|
| Part Number | <b>TW33120014D</b>  |
| Range       | 40mm / 1.6" bar 35mm to 180mm / 1.4" to 7"<br>8mm / 0.3" bar 25mm to 160mm / 1" to 6.3" |

|              |                                    |
|--------------|------------------------------------|
| Dimensions   | 170 x 94 x 54mm / 6.7 x 3.7 x 2.1" |
| Sensing area | 160 x 80mm / 6.3 x 3.15"           |

**Elcometer 331****Accessories****Borehole Probe**

The solution for locating tendon ducts and multiple layers of rebar lying deep within the concrete.

|                              |  | Metric               | Imperial             |
|------------------------------|--|----------------------|----------------------|
| Part Number                  | Short  | <b>TW33119223-1A</b> | <b>TW33119223-3A</b> |
|                              | Long   | <b>TW33119223-2A</b> | <b>TW33119223-4A</b> |
| Measurement depth            | Short Probe: 0 - 400mm / 0 - 16"<br>Long Probe: 0 - 1000mm / 0 - 40" |                      |                      |
| Approximate detection ranges | Tendon duct (70mm / 2.75" diameter):<br>up to 90mm / 3.54"           |                      |                      |

**Half-Cell Kit**


Consists of either a copper electrode in a copper sulphate solution or a silver electrode in a sodium chloride solution, each half cell is a sealed unit - no need to mix chemicals. Supplied with a 25m / 80' cable, every half-cell probe is guaranteed for 5 years.

|             |                   |                        |
|-------------|-------------------|------------------------|
| Part Number | <b>TW331CUKIT</b> | Copper/Copper Sulphate |
|             | <b>TW331AGKIT</b> | Silver/Silver Chloride |

**Extension Cable 100m / 325ft**

The extension cable for use with the half-cell kits gives the flexibility to take readings in difficult to reach areas.

|             |                   |
|-------------|-------------------|
| Part Number | <b>TW33119683</b> |
|-------------|-------------------|

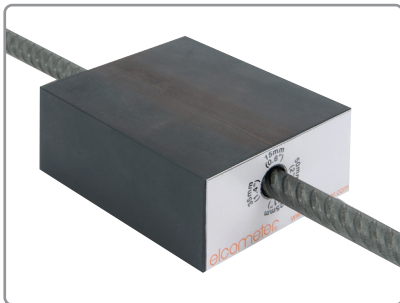**Verification Block**

The verification block allows the user to check the calibration of their gauge in order to ensure maximum measurement accuracy.

|             |                   |
|-------------|-------------------|
| Part Number | <b>TW33119218</b> |
|-------------|-------------------|

**Extension Arm Kit**

This kit allows the user to scan bridge decks and floor areas using the hand-held search heads from a standing position as both the standard or narrow pitch search head can be attached to the extension arm.

|             |                   |
|-------------|-------------------|
| Part Number | <b>TW33119222</b> |
|-------------|-------------------|







# Concrete Inspection & Metal Detection

Test Hammer

13-6

Cover Meters & Half Cell Meters

13-8

Moisture Meters

13-22

Metal Detection

13-26

13



## Elcometer 7000

## Digital Moisture Meters



The Elcometer 7000 range offers accurate and easy to use moisture measurement.

Available in two versions, the Concrete Moisture Meter has a non-invasive probe that emits a radio frequency to penetrate the surface to detect moisture. Ideal for rapid surveys of solid wall, floors and ceramic tiles.

The Digital Moisture Meter has two pin probes that allows the gauge to be pressed on to a surface and take a measurement of the immediate. It also has a non-invasive probe on the back of the gauge for moisture detection.

- Calibrated ready for use
- Instant readings on a clear, easy to read scale
- Fully portable and battery operated

### Technical Specification

| Model             | Elcometer 7000S Concrete Moisture Meter   | Elcometer 7000PS Digital Moisture Meter  | Certificate |
|-------------------|---|--|-------------|
| Part Number       | <b>G7000S</b>   | <b>G7000PS</b>   | ○           |
| Measuring Range   | 70 to 999 relative (non-invasive)<br>Dry (green); 70 - 169<br>At risk (yellow); 170 - 199<br>Wet (red); 200 - 999   | 70 to 999 relative (non-invasive)<br>Dry (green); 70 - 169<br>At risk (yellow); 170 - 199<br>Wet (red); 200 - 999<br>7.9% to 99% WME (pin measurement)<br>Dry (green); 7 - 16.9<br>At Risk (yellow); 17 - 19.9<br>Wet (red); 20 - 99.9 |             |
| Measurement Depth | Non-invasive up to 19mm ( $\frac{3}{4}$ " )   | Non-invasive up to 19mm ( $\frac{3}{4}$ " )<br>Pin up to 12.7mm ( $\frac{1}{2}$ " )  |             |
| Display           | LCD Display with separate colour indicators   |  |             |
| Dimensions        | 175 x 48 x 50mm (7.0 x 1.9 x 2.0")  | 190 x 70 x 49mm (7.5 x 2.75 x 1.9")  |             |
| Weight            | 195g (7oz)  | 225g (8oz)   |             |
| Power Supply      | 9V battery (~ 20 hours continuous use)  |  |             |
| Packing list      | Elcometer 7000 Moisture Meter, HD MC probe (Model PS), Deep Wall probe 127mm (5") (Model PS), pin calibration check (Model PS), wood calibration chart (Model PS), battery, carry case and operating instructions |  |             |

○ Optional Calibration Certificate available for Elcometer 7000PS Digital Moisture Meter only

**Elcometer 7410****Concrete Moisture Meter****STANDARDS:**

ASTM F 2659

The Elcometer 7410 is an accurate and easy to use non-invasive instrument for non-destructive measurement of moisture content of concrete.

The electrodes transmit parallel low frequency signals, calibrated to give average moisture content by comparing the change in impedance between damp and acceptably dry concrete.


- Calibrated ready for use on concrete
- Instant readings on a clear, easy to read scale
- Fully portable, battery operated and non-destructive

**Technical Specification**

| Part Number       | Description   | Certificate          |
|-------------------|---|----------------------|
| K0007410M001      | Elcometer 7410 Concrete Moisture Meter  | •                    |
| Measuring Range   | Concrete 0 - 6%, Floor screed 0-10%   |                      |
| Substrate Type    | Concrete, gypsum floor screed   |                      |
| Measurement Depth | 12.5mm (0.5")   |                      |
| Dimensions        | 155 x 85 x 43mm (6.1 x 3.3 x 1.7")  | Weight 298g (10.5oz) |
| Power Supply      | 9V PP3 battery (6F22 (PP3) type)  |                      |
| Packing list      | Elcometer 7410 Concrete Moisture Meter, battery, carry case, calibration certificate and operating instructions |                      |

**Accessories**

KT007410P001 Calibration Check Plate

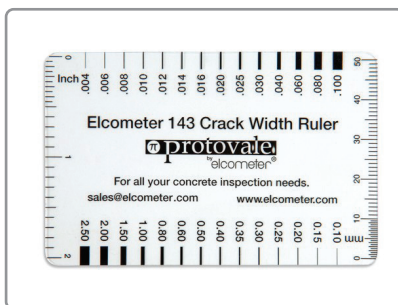**Elcometer 143****Crack Width Ruler**

This simple gauge is designed specifically to provide inspectors with a low cost alternative to a graduated microscope when determining the width of a crack in concrete or other building materials.

Similar in size to a standard credit card, this transparent gauge is marked with a range of graded lines. Each line is a specified width.

To use, position the gauge over the crack and identify which line is a similar width to the crack. Read off the width value.

**Technical Specification**

| Part Number | Description                          |
|-------------|--------------------------------------|
| E143-----1  | Elcometer 143 Crack Width Ruler      |
| Range       | 0.10 - 2.50mm / 0.004 - 0.100 inches |

• Certificate supplied as standard.







# Concrete Inspection & Metal Detection

Test Hammer

13-6

Cover Meters & Half Cell Meters

13-8

Moisture Meters

13-22

Metal Detection

13-26

13



Elcometer P500

Metal Box Locator



Although originally designed to accurately locate valve boxes and manhole covers, the Elcometer P500 can also be used as a general metal detector. It is straight forward to use and very rugged making it a popular choice in the market.

Detects metal objects to a maximum depth of 1m (39.4”), the Elcometer P500 has a number of key unique features:

- Manufactured from a single moulded design, in high impact ABS plastic, the Elcometer P500 stands up to a tough environment
- A balanced, lightweight unit with a single control button for ease of use
- Audio signal with headphone socket and an ultra-bright LED visual indicator which identifies when metal has been detected

Technical Specification

| Part Number          | Description   |
|----------------------|---|
| W500157F             | Elcometer P500 Metal Box Locator  |
| Overall Length       | 960mm (38")   |
| Search Head Diameter | 210mm (8")  |
| Weight               | 1.1kg (2.5lb)   |
| Power Supply         | 4 x 1.5V AA Cells or 4 x 1.5V NiMH Rechargeable Cells                           |
| Packing List         | Elcometer P500 Metal Box Locator, 4x LR6 (AA) batteries, operating instructions |

Approximate Detection Ranges

| Typical Object Type | Metric | Imperial |
|---------------------|--------|----------|
| Stop Top Box        | 500mm  | 19"      |
| Fire Hydrant Cover  | 870mm  | 34"      |
| Inspection Cover    | 950mm  | 37"      |

Metal Box Locator

The Elcometer P500 submits a strong, focused downwards search field ensuring the accurate location of objects, even when close to metal fencing and vehicles.

The metal box locator ignores any ghost signals from cigarette packets, drink cans and other metallic waste materials, making your search more efficient.





The **Elcometer 500** can quickly, accurately and repeatably measure dry film thickness on concrete and other cementitious substrates.







A construction worker wearing a white hard hat and an orange safety vest over a red and white checkered shirt is looking at a silver laptop. The background is a blurred construction site.

## Standards & Index

14



This section lists all Standards included in this catalogue. Current Standards are shown in orange and superseded Standards are shown in grey. For further information please see the catalogue introduction. For the most up to date information, please refer to our website.

| Standard          | Reference           | Elcometer Model  | Page             | Standard       | Reference           | Elcometer Model             | Page             |
|-------------------|---------------------|------------------|------------------|----------------|---------------------|-----------------------------|------------------|
| <b>ACI</b>        |                     |                  |                  | ASTM D 3359-B  | Dry Film Thickness  | 121/4                       | 7-53             |
| ACI 318           | Concrete            | 331B, 331        | 13-10, 13-12     | ASTM D 4138-A  | Dry Film Thickness  | 121/4, 141                  | 7-53, 7-54       |
| <b>ANSI</b>       |                     |                  |                  | ASTM D 4212    | Viscosity           | 2210                        | 10-11            |
| ANSI/AWWA C 203   | Porosity            | 280              | 9-10             | ASTM D 4414-A  | Wet Film Thickness  | 112, 112AL, 115, 3236, 3238 | 63,65,64,63,64   |
| ANSI/AWWA C 213   | Porosity            | 266, 236         | 9-16 , 9-19      | ASTM D 4417-A  | Surface Preparation | 125, 127                    | 3-14, 3-15       |
| ANSI/AWWA C 214   | Porosity            | 280              | 9-10             | ASTM D 4417-B  | Surface Preparation | 224, 123                    | 3-6, 3-9, 3-12   |
| <b>AS</b>         |                     |                  |                  | ASTM D 4417-C  | Surface Preparation | 122, 124                    | 3-13, 3-14       |
| AS 1580.108.2     | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54       | ASTM D 4541    | Adhesion            | 106, 508, 108               | 8-18, 8-24, 8-26 |
| AS 1580.408.4     | Adhesion            | 107, 1542        | 8-32, 8-34       | ASTM D 4541    | Adhesion            | 510, 506                    | 8-6, 8-15        |
| AS 1580.408.4     | Dry Film Thickness  | 121/4            | 7-53             | ASTM D 4787    | Porosity            | 280, 266, 236               | 9-10, 9-16, 9-19 |
| AS 1580.408.5     | Adhesion            | 106              | 8-18             | ASTM D 4940    | Surface Preparation | 138 ASTM                    | 1-4              |
| AS 2331.1.3       | Dry Film Thickness  | 211              | 7-42             | ASTM D 5125    | Viscosity           | 2435, 2437                  | 10-9, 10-9       |
| AS 2331.1.4       | Dry Film Thickness  | 456              | 7-11, 7-27       | ASTM D 5162    | Porosity            | 280                         | 9-10             |
| AS 3894.1         | Porosity            | 280, 266, 236    | 9-10, 9-16, 9-19 | ASTM D 5162-A  | Porosity            | 270                         | 9-6              |
| AS 3894.2         | Porosity            | 270              | 9-6              | ASTM D 5162-B  | Porosity            | 266                         | 9-16             |
| AS 3894.3-A       | Dry Film Thickness  | 211              | 7-42             | ASTM D 5162-B  | Porosity            | 236                         | 9-19             |
| AS 3894.3-B       | Dry Film Thickness  | 456              | 7-11, 7-27       | ASTM D 6132    | Dry Film Thickness  | 500                         | 7-33             |
| AS 3894.5         | Surface Preparation | 125, 127, 129    | 3-14, 3-15, 3-15 | ASTM D 7091    | Dry Film Thickness  | 456, 456 IPC                | 7-11, 7-27, 7-31 |
| AS 3894.6-A       | Surface Preparation | 138, 138/2       | 1-5, 4-14, 4-17  | ASTM D 7234    | Adhesion            | 506, 106/6                  | 8-15, 8-20       |
| AS 3894.6-C       | Surface Preparation | 142              | 4-22             | ASTM D 7234-12 | Adhesion            | 510                         | 8-6              |
| AS 3894.6-D       | Surface Preparation | 138/2            | 1-5, 4-17        | ASTM E 2501    | Porosity            | 260                         | 9-21             |
| AS 3894.9         | Adhesion            | 107, 1542        | 8-32, 8-34       | ASTM E 337-B   | Climate             | 116                         | 5-8              |
| AS 3894.9         | Dry Film Thickness  | 121/4            | 7-53             | ASTM E 376     | Dry Film Thickness  | 456                         | 7-11, 7-27       |
| <b>AS/NZS</b>     |                     |                  |                  | ASTM E 70      | Surface Preparation | 148                         | 1-6              |
| AS/NZS 1580.107.3 | Wet Film Thickness  | 112AL, 112, 115  | 6-5, 6-3, 6-4    | ASTM E 797     | Material Thickness  | MTG                         | 2-3              |
| AS/NZS 1580.107.3 | Wet Film Thickness  | 3236, 3238, 3230 | 6-3, 6-4, 6-6    | ASTM G 12      | Dry Film Thickness  | 456                         | 7-11, 7-27       |
| AS/NZS 1580.108.1 | Dry Film Thickness  | 211              | 7-42             | ASTM G 12      | Dry Film Thickness  | 211                         | 7-42             |
| AS/NZS 1580.108.1 | Dry Film Thickness  | 456              | 7-11, 7-27       | ASTM G 6       | Porosity            | 270                         | 9-6              |
| AS/NZS 1580.408.5 | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  | ASTM G 62-A    | Porosity            | 270                         | 9-6              |
| <b>ASTM</b>       |                     |                  |                  | ASTM G 62-B    | Porosity            | 266                         | 9-16             |
| ASTM B 499        | Dry Film Thickness  | 456              | 7-11, 7-27       | ASTM G 62-B    | Porosity            | 236                         | 9-19             |
| ASTM B 499        | Dry Film Thickness  | 211              | 7-42             | <b>BS</b>      |                     |                             |                  |
| ASTM C 1583       | Adhesion            | 510              | 8-6              | BS 1344-11     | Porosity            | 266                         | 9-16             |
| ASTM C 536        | Porosity            | 266, 236         | 9-16 , 9-19      | BS 1344-11     | Porosity            | 236                         | 9-19             |
| ASTM C 537        | Porosity            | 266, 236         | 9-16 , 9-19      | BS 1881:201    | Concrete            | 331B, 331                   | 13-10, 13-12     |
| ASTM C 805        | Concrete            | 181              | 13-6             | BS 1881:202    | Concrete            | 181                         | 13-6             |
| ASTM C 876-91     | Concrete            | 331HM, 331B, 331 | 138,13-10,13-12  | BS 1881:204    | Concrete            | 331B, 331                   | 13-10, 13-12     |
| ASTM D 1084-D     | Viscosity           | 2210             | 10-11            | BS 1881-207    | Adhesion            | 510, 506, 106/6             | 8-6, 8-15, 8-20  |
| ASTM D 1186-B     | Dry Film Thickness  | 456              | 7-11, 7-27       | BS 2842        | Climate             | 116                         | 5-8              |
| ASTM D 1200       | Viscosity           | 2435, 2437       | 10-9, 10-9       | BS 3900-C5-5B  | Dry Film Thickness  | 141                         | 7-54             |
| ASTM D 1212-A     | Wet Film Thickness  | 3230             | 6-6              | BS 3900-C5-5B  | Dry Film Thickness  | 121/4                       | 7-53             |
| ASTM D 1400       | Dry Film Thickness  | 456              | 7-11, 7-27       | BS 3900-C5-6A  | Dry Film Thickness  | 211                         | 7-42             |
| ASTM D 2200       | Surface Preparation | 128              | 3-3              | BS 3900-C5-6A  | Dry Film Thickness  | 456                         | 7-11, 7-27       |
| ASTM D 3359-B     | Adhesion            | 107, 1542        | 8-32, 8-34       | BS 3900-C5-6B  | Dry Film Thickness  | 456                         | 7-11, 7-27       |

| Standard                | Reference           | Elcometer Model  | Page               |
|-------------------------|---------------------|------------------|--------------------|
| BS 3900-C5-7A           | Wet Film Thickness  | 3230             | 6-6                |
| BS 3900-C5-7B           | Wet Film Thickness  | 112, 3236        | 6-3                |
| BS 3900-C5-7B           | Wet Film Thickness  | 115, 3238        | 6-4                |
| BS 3900-C5-7B           | Wet Film Thickness  | 112AL, 154       | 6-5                |
| BS 3900-E6              | Adhesion            | 107, 1542        | 8-32, 8-34         |
| BS 3900-E6              | Dry Film Thickness  | 121/4            | 7-53               |
| BS 5411-11              | Dry Film Thickness  | 211              | 7-42               |
| BS 5411-11              | Dry Film Thickness  | 456              | 7-11, 7-27         |
| BS 5411-3               | Dry Film Thickness  | 456              | 7-11, 7-27         |
| BS 5599                 | Dry Film Thickness  | 456              | 7-11, 7-27         |
| BS 7079-B4              | Climate             | 319              | 5-4                |
| BS 7079-B4              | Climate             | 309              | 5-7                |
| BS 7079-C5              | Surface Preparation | 122              | 3-13               |
| BS 7793-2               | Porosity            | 270              | 9-6                |
| BS 8110                 | Concrete            | 331B, 331        | 13-10, 13-12       |
| <b>Concrete Society</b> |                     |                  |                    |
| Technical Report 60     | Concrete            | 331HM, 331B, 331 | 13-8, 13-10, 13-12 |
| <b>CP</b>               |                     |                  |                    |
| CP 110                  | Concrete            | 331B, 331        | 13-10, 13-12       |
| <b>DIN</b>              |                     |                  |                    |
| DIN 1045                | Concrete            | 331B, 331        | 13-10, 13-12       |
| DIN 1048                | Concrete            | 181              | 13-6               |
| DIN 1048-2              | Adhesion            | 510, 506, 106/6  | 8-6, 8-15, 8-20    |
| DIN 50981               | Dry Film Thickness  | 456              | 7-11, 7-27         |
| DIN 50981               | Dry Film Thickness  | 211              | 7-42               |
| DIN 50984               | Dry Film Thickness  | 456              | 7-11, 7-27         |
| DIN 50986               | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54         |
| DIN 53211               | Viscosity           | 2435, 2437       | 10-9, 10-9         |
| DIN 55670               | Porosity            | 266              | 9-16               |
| DIN 55670               | Porosity            | 236              | 9-19               |
| <b>EC</b>               |                     |                  |                    |
| EC 2                    | Concrete            | 331B, 331        | 13-10, 13-12       |
| <b>ECCA</b>             |                     |                  |                    |
| ECCA T1                 | Dry Film Thickness  | 456              | 7-11, 7-27         |
| ECCA T6                 | Adhesion            | 107, 1542        | 8-32, 8-34         |
| ECCA T6                 | Dry Film Thickness  | 121/4            | 7-53               |
| <b>EN</b>               |                     |                  |                    |
| EN 1015-12              | Adhesion            | 510              | 8-6                |
| EN 12504-2              | Concrete            | 181              | 13-6               |
| EN 12636                | Adhesion            | 510, 506, 106/6  | 8-6, 8-15, 8-20    |
| EN 13144                | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18    |
| EN 13523-1              | Dry Film Thickness  | 456              | 7-11, 7-27         |
| EN 13523-6              | Adhesion            | 107, 1542        | 8-32, 8-34         |
| EN 13523-6              | Dry Film Thickness  | 121/4            | 7-53               |
| EN 14127                | Material Thickness  | MTG              | 2-3                |
| EN 14430                | Porosity            | 266, 236         | 9-16, 9-19         |
| EN 15317                | Material Thickness  | MTG              | 2-3                |

| Standard           | Reference           | Elcometer Model  | Page             |
|--------------------|---------------------|------------------|------------------|
| EN 1542            | Adhesion            | 510, 506, 106/6  | 8-6, 8-15, 8-20  |
| EN 24624           | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  |
| <b>IMO</b>         |                     |                  |                  |
| IMO MSC.215(82)    | Surface Preparation | 128, 125, 142    | 3-3, 3-14, 4-22  |
| IMO MSC.215(82)    | Climate             | 319              | 5-4              |
| IMO MSC.215(82)    | Dry Film Thickness  | 456              | 7-11, 7-27       |
| IMO MSC.215(82)    | Surface Preparation | 138, 142         | 4-22, 4-14       |
| IMO MSC.244(83)    | Surface Preparation | 128, 125         | 3-3, 3-14        |
| IMO MSC.244(83)    | Surface Preparation | 138, 142         | 4-22, 4-14       |
| IMO MSC.244(83)    | Climate             | 319              | 5-4              |
| IMO MSC.244(83)    | Dry Film Thickness  | 456              | 7-11, 7-27       |
| <b>ISO</b>         |                     |                  |                  |
| ISO 1461           | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 14654          | Porosity            | 270              | 9-6              |
| ISO 16276-1        | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  |
| ISO 16276-1        | Adhesion            | 508, 108         | 8-24, 8-26       |
| ISO 16276-2        | Adhesion            | 107, 1542        | 8-32, 8-34       |
| ISO 16276-2        | Dry Film Thickness  | 121/4            | 7-53             |
| ISO 19840          | Dry Film Thickness  | 456, 456 IPC     | 7-11, 7-27, 7-31 |
| ISO 2063           | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2178           | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2178           | Dry Film Thickness  | 211              | 7-42             |
| ISO 2360           | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2409           | Adhesion            | 107, 1542        | 8-32, 8-34       |
| ISO 2409           | Dry Film Thickness  | 121/4            | 7-53             |
| ISO 2431           | Viscosity           | 2437, 2435       | 9-10, 9-10       |
| ISO 2746           | Porosity            | 280, 266, 236    | 9-10, 9-16, 9-19 |
| ISO 2808           | Dry Film Thickness  | 456 IPC          | 7-31             |
| ISO 2808-12        | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2808-1A        | Wet Film Thickness  | 112, 3236, 115   | 6-3, 6-3, 6-4    |
| ISO 2808-1A        | Wet Film Thickness  | 3238, 112AL, 154 | 6-4, 6-5, 6-5    |
| ISO 2808-1B        | Wet Film Thickness  | 3230             | 6-6              |
| ISO 2808-5B        | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54       |
| ISO 2808-6A        | Dry Film Thickness  | 456, 211         | 7-11, 7-27, 7-42 |
| ISO 2808-6B        | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2808-6B        | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54       |
| ISO 2808-7A        | Dry Film Thickness  | 211              | 7-42             |
| ISO 2808-7A        | Wet Film Thickness  | 3230             | 6-6              |
| ISO 2808-7B        | Wet Film Thickness  | 112, 3236        | 6-3, 6-3         |
| ISO 2808-7B        | Wet Film Thickness  | 115, 3238        | 6-4, 6-4         |
| ISO 2808-7B        | Wet Film Thickness  | 112AL, 154       | 6-5, 6-5         |
| ISO 2808-7C        | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2808-7D        | Dry Film Thickness  | 456              | 7-11, 7-27       |
| ISO 2808 Method 10 | Dry Film Thickness  | 500              | 7-33             |
| ISO 29601          | Porosity            | 280, 266, 236    | 9-10, 9-16, 9-19 |
| ISO 4624           | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  |
| ISO 8045           | Concrete            | 181              | 13-6             |



| Standard         | Reference           | Elcometer Model  | Page             |
|------------------|---------------------|------------------|------------------|
| ISO 8289-A       | Porosity            | 270              | 9-6              |
| ISO 8501-1       | Surface Preparation | 128              | 3-3              |
| ISO 8502-11      | Surface Preparation | 134 CSN          | 4-20             |
| ISO 8502-3       | Surface Preparation | 142              | 4-22             |
| ISO 8502-4       | Climate             | 319, 309         | 5-4, 5-7         |
| ISO 8502-5       | Surface Preparation | 134S, 134 CSN    | 4-19, 4-20       |
| ISO 8502-6       | Surface Preparation | 135C, 135B       | 4-13, 4-13       |
| ISO 8502-6       | Surface Preparation | 138              | 4-14             |
| ISO 8502-9       | Surface Preparation | 138              | 4-14             |
| ISO 8503-1       | Surface Preparation | 125              | 3-14             |
| ISO 8503-2       | Surface Preparation | 125              | 3-14             |
| ISO 8503-5       | Surface Preparation | 122, 124         | 3-13, 3-14       |
| <b>JIS</b>       |                     |                  |                  |
| JIS G 3491       | Porosity            | 280              | 9-10             |
| JIS G 3492       | Porosity            | 280              | 9-10             |
| JIS K 5600-1-7   | Wet Film Thickness  | 112, 3236        | 6-3, 6-3         |
| JIS K 5600-1-7   | Wet Film Thickness  | 115, 3238        | 6-4, 6-4         |
| JIS K 5600-1-7   | Wet Film Thickness  | 112AL, 154, 3230 | 6-5, 6-5, 6-6    |
| JIS K 5600-1-7   | Dry Film Thickness  | 456              | 7-11, 7-27       |
| JIS K 5600-1-7   | Dry Film Thickness  | 211              | 7-42             |
| JIS K 5600-1-7   | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54       |
| JIS K 5600-5-6   | Adhesion            | 107, 1542        | 8-32, 8-34       |
| JIS K 5600-5-7   | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  |
| JIS K 6766       | Porosity            | 270, 266, 236    | 9-6, 9-16, 9-19  |
| <b>NACE</b>      |                     |                  |                  |
| NACE RP0178      | Surface Preparation | 999              | 3-5              |
| NACE RP0188      | Porosity            | 270, 266, 236    | 9-6, 9-16, 9-19  |
| NACE RP0190      | Porosity            | 266, 236         | 9-16, 9-19       |
| NACE RP0274      | Porosity            | 280, 266, 236    | 9-10, 9-16, 9-19 |
| NACE SP0178-2007 | Surface Preparation | 999              | 3-5              |
| NACE RP0287      | Surface Preparation | 122, 124         | 3-13, 3-14       |
| NACE RP0490      | Porosity            | 266, 236         | 9-16, 9-19       |
| NACE SP0188      | Porosity            | 270, 280         | 9-6, 9-10        |
| NACE SP0188      | Porosity            | 266, 236         | 9-16, 9-19       |
| NACE SP0490      | Porosity            | 280, 266, 236    | 9-10, 9-16, 9-19 |
| NACE TM0186      | Porosity            | 280              | 9-10             |
| NACE TM0384      | Porosity            | 270, 280         | 9-6, 9-10        |
| <b>NF</b>        |                     |                  |                  |
| NF P18-417       | Concrete            | 181              | 13-6             |
| NF T30-014       | Viscosity           | 2437, 2435       | 10-9, 10-9       |
| NF T30-038       | Adhesion            | 107, 1542        | 8-32, 8-34       |
| NF T30-038       | Dry Film Thickness  | 121/4            | 7-53             |
| NF T30-062       | Adhesion            | 510, 506, 106    | 8-6, 8-15, 8-18  |
| NF T30-123       | Dry Film Thickness  | 121/4, 141       | 7-53, 7-54       |
| NF T30-124       | Dry Film Thickness  | 456              | 7-11, 7-27       |
| NF T30-124       | Dry Film Thickness  | 211              | 7-42             |
| NF T30-125       | Wet Film Thickness  | 112, 3236        | 6-3, 6-3         |
| NF T30-125       | Wet Film Thickness  | 115, 3238        | 6-4, 6-4         |

| Standard              | Reference           | Elcometer Model    | Page                   |
|-----------------------|---------------------|--------------------|------------------------|
| NF T30-125            | Wet Film Thickness  | 112AL, 154         | 6-5, 6-5               |
| NF T30-125            | Wet Film Thickness  | 3230               | 6-6                    |
| NF T30-606            | Adhesion            | 510, 506           | 8-6, 8-15              |
| NF T30-606            | Adhesion            | 106, 508, 108      | 8-18, 8-24, 8-26       |
| <b>NSI</b>            |                     |                    |                        |
| NSI 009-32            | Surface Preparation | 130 SSP            | 4-3                    |
| <b>SANS</b>           |                     |                    |                        |
| SANS 5772             | Surface Preparation | 224, 123           | 3-6, 3-9, 3-12         |
| <b>SIA</b>            |                     |                    |                        |
| SIA 262               | Concrete            | 331B, 331          | 13-10, 13-12           |
| <b>SS</b>             |                     |                    |                        |
| SS 184159             | Dry Film Thickness  | 456                | 7-11, 7-27             |
| SS 55900              | Surface Preparation | 128                | 3-3                    |
| SS-EN 206             | Concrete            | 331B, 331          | 13-10, 13-12           |
| <b>SSPC</b>           |                     |                    |                        |
| SSPC Guide 15         | Surface Preparation | 138/2, 130 SSP     | 1-5, 4-3               |
| SSPC Guide 15         | Surface Preparation | 130, 138           | 4-9, 4-14              |
| SSPC Guide 15         | Surface Preparation | 134S, 134 CSN      | 4-19, 4-20             |
| SSPC PA 17            | Surface Preparation | 122, 124, 125, 127 | 3-13, 3-14, 3-14, 3-15 |
| SSPC PA 17            | Surface Preparation | 224, 123           | 3-6, 3-9, 3-12, 3-13   |
| SSPC PA 2             | Dry Film Thickness  | 456, 456 IPC       | 7-11, 7-27, 7-31       |
| SSPC PA 2             | Dry Film Thickness  | 211                | 7-42                   |
| SSPC PA 9             | Dry Film Thickness  | 500                | 7-33                   |
| SSPC VIS 1            | Surface Preparation | 128                | 3-3                    |
| SSPC VIS 2            | Surface Preparation | 128                | 3-3                    |
| SSPC VIS 3            | Surface Preparation | 128                | 3-3                    |
| SSPC VIS 4            | Surface Preparation | 128                | 3-3                    |
| SSPC VIS 5            | Surface Preparation | 128                | 3-3                    |
| <b>UNI</b>            |                     |                    |                        |
| UNI 10174             | Concrete            | 331HM, 331B, 331   | 13-8, 13-10, 13-12     |
| UNI 9189              | Concrete            | 181                | 13-6                   |
| <b>US NAVY</b>        |                     |                    |                        |
| US Navy NSI 009-32    | Surface Preparation | 128, 224, 123      | 3-3, 3-6, 3-9, 3-12    |
| US Navy NSI 009-32    | Surface Preparation | 122, 124           | 3-13, 3-14             |
| US Navy NSI 009-32    | Surface Preparation | 138                | 4-14                   |
| US Navy NSI 009-32    | Climate             | 319                | 5-4                    |
| US Navy NSI 009-32    | Wet Film Thickness  | 112, 3236          | 6-3, 6-3               |
| US Navy NSI 009-32    | Wet Film Thickness  | 115, 3238          | 6-4, 6-4               |
| US Navy NSI 009-32    | Wet Film Thickness  | 112AL              | 6-5                    |
| US Navy NSI 009-32    | Dry Film Thickness  | 456, 456 IPC       | 7-11, 7-27, 7-31       |
| US Navy PPI 63101-000 | Surface Preparation | 128, 224, 123      | 3-3, 3-6, 3-12         |
| US Navy PPI 63101-000 | Surface Preparation | 122, 124, 138      | 3-13, 3-14, 4-14       |
| US Navy PPI 63101-000 | Surface Preparation | 142                | 4-22                   |
| US Navy PPI 63101-000 | Climate             | 319                | 5-4                    |
| US Navy PPI 63101-000 | Wet Film Thickness  | 112, 3236          | 6-3, 6-3               |
| US Navy PPI 63101-000 | Wet Film Thickness  | 115, 3238, 112AL   | 6-4, 6-4, 6-5          |
| US Navy PPI 63101-000 | Dry Film Thickness  | 456                | 7-11, 7-27             |

| Product Type                               | Page         | Product Type                              | Page                       |
|--|--------------|---|----------------------------|
| <b>A</b>                                   |              |   |                            |
| Adhesion                                   | 8.1 - 8.35   | Coating Thickness - Bluetooth®            | 7.6 - 7.38                 |
| Adhesion - Cross Hatch Method              | 8.32 - 8.35  | Coating Thickness - Calibration Foils     | 7.47                       |
| Adhesion - Hydraulic                       | 8.26 - 8.28  | Coating Thickness - Marker Pens           | 10.6                       |
| Adhesion - Pull Off Method                 | 8.6 - 8.23   | Coating Thickness - Test Plates           | 7.48                       |
| Adhesion - Push Off Method                 | 8.24 - 8.28  | Coating Thickness Gauge - Accessories     | 7.24                       |
| Adhesion Tester - Digital                  | 8.6 - 8.14   | Coating Thickness Gauge - Concrete        | 7.33 - 7.38                |
| AFNOR Viscosity Dip Cups                   | 10.10        | Coating Thickness Gauge - Destructive     | 7.52 - 7.55                |
| Air Thermometers                           | 5.3 - 5.9    | Coating Thickness Gauge - Digital         | 7.6 - 7.38                 |
| Aluminium Wet Film Combs                   | 6.5          | Coating Thickness Gauge - Mechanical      | 7.42 - 7.43                |
| Amine Blush Chip Screen Test Kit           | 4.21         | Coating Thickness Gauge - PIG             | 7.52 - 7.55                |
| Amine Blush Swab Test Kit                  | 4.21         | Coating Thickness Gauge - Pull Off        | 7.52 - 7.55                |
| Analogue Concrete Test Hammer              | 13.6         | Coating Thickness Gauge - 'Tookey' Type   | 7.52 - 7.53                |
| Anemometer                                 | 5.14         | Coating Thickness - Zero Plates           | 7.48                       |
| Appendix                                   | 14.9         | Combs - Wet Film                          | 6.3 - 6.5                  |
| ASTM Viscosity Dip Cups                    | 10.9         | Compact Moisture Meter                    | 13.22                      |
| Atlas of Coating Defects                   | 10.7         | Comparators - Surface                     | 3.5, 3.14 - 3.15           |
| Banana Type Coating Thickness Gauge        | 7.42 - 7.43  | Concrete Adhesion Tester                  | 8.20 - 8.21                |
| Black Light - see Ultra Violet             | 9.21         | Concrete Inspection & Metal Detection     | 13.1 - 13.27               |
| <b>B</b>                                   |              | Concrete Inspection - Covermeters         | 13.10 - 13.16              |
| Blast Nozzle Gauge                         | 1.9          | Concrete Inspection - Half Cell           | 13.8 - 13.9, 13.12 - 13.16 |
| Bluetooth® Adhesion Tester                 | 8.6 - 8.14   | Concrete Inspection - Test Hammers        | 13.6                       |
| Bluetooth® Coating Thickness Gauge         | 7.6 - 7.38   | Concrete Inspection - Software            | 13.17                      |
| Bluetooth® Dewpoint Meter                  | 5.3 - 5.6    | Concrete Inspection - Crack Width Ruler   | 13.23                      |
| Bluetooth® Material Thickness Gauge        | 2.3 - 2.11   | Concrete Moisture Meter                   | 13.22 - 13.23              |
| Bluetooth® Soluble Salt Profiler           | 4.3 - 4.12   | Conductivity Meter                        | 1.8                        |
| Bluetooth® Surface Profile Gauge           | 3.6 - 3.11   | Conductivity Meter - Salt                 | 1.7                        |
| Bresle Patches                             | 4.13         | Convex Surface Probe                      | 3.8                        |
| Bresle Salt Kit                            | 4.14         | CoverMaster™ Software                     | 13.17                      |
| Calculator - Dewpoint                      | 5.9          | Corrosion Thickness                       | 2.3 - 2.11                 |
| <b>C</b>                                   |              | Couplant                                  | 2.11                       |
| Calibration Foils                          | 7.47         | Covermeter                                | 13.10 - 13.16              |
| Calibration Oils - Viscosity Cups          | 10.12        | Covermeter & Half Cell Meters             | 13.8 - 13.16               |
| Chloride Ion Test Kit for Abrasives        | 1.3          | Crack Width Ruler                         | 13.23                      |
| Chloride Ion Test Kit for Surfaces         | 4.19         | Cross Cut - Adhesion                      | 8.32 - 8.35                |
| Chloride Ion Test Kit for Water            | 1.3          | Cross Hatch - Adhesion                    | 8.32 - 8.35                |
| Chloride Test Strips                       | 1.5          | CSN Chloride, Sulphate & Nitrate Test Kit | 4.20                       |
| Chloride, Sulphate, Nitrate Test Kit - CSN | 4.20, 11.14  | Cup - Viscosity                           | 10.8 - 10.14               |
| Climate                                    | 5.1 - 5.14   | DC Holiday Detector                       | 9.10 - 9.13                |
| Climate Condition Testing                  | 5.1 - 5.14   | <b>D</b>                                  |                            |
| Cloud Computing with ElcoMaster®           | 12.3 - 12.9  | Destructive Coating Thickness Gauge       | 7.52 - 7.55                |
| Coating Defects Atlas                      | 10.7         | Dewpoint Calculator                       | 5.9                        |
| Coating Inspection Kits                    | 11.3 - 11.16 | Dewpoint Meter                            | 5.3 - 5.7                  |
| Coating Inspection Software                | 12.2 - 12.9  | Differential Mode                         | 2.3 - 2.10                 |
|  |              | Digital Adhesion Tester                   | 8.6 - 8.14                 |
|  |              | Digital Coating Thickness - Accessories   | 7.24                       |
|  |              | Digital Coating Thickness Gauges          | 7.6 - 7.38                 |



## Product Type Page

|                                    |               |
|------------------------------------|---------------|
| Digital Hygrometers                | 5.7           |
| Digital Moisture Meter             | 13.22 - 13.23 |
| Digital Pocket Thermometers        | 5.11          |
| Digital Surface Profile Gauge      | 3.6 - 3.11    |
| Digital Thermometer                | 5.11 - 5.13   |
| Digital Waterproof Thermometers    | 5.12          |
| Dip Cups                           | 10.9 - 10.11  |
| Dip Cups - Viscosity               | 10.9 - 10.11  |
| Disposable Wet Film Combs          | 6.5           |
| Dry Film Thickness                 | 7.1 - 7.55    |
| Dry Film Thickness - Bluetooth®    | 7.6 - 7.38    |
| Dry Film Thickness - Destructive   | 7.52 - 7.55   |
| Dry Film Thickness - Digital       | 7.6 - 7.38    |
| Dry Film Thickness - Mechanical    | 7.42 - 7.43   |
| Dry Film Thickness - Probes        | 7.12 - 7.23   |
| Dual Element Thickness Transducers | 2.11          |
| Dust Tape Roller                   | 4.22          |
| Dust Tape Test Kit                 | 4.22          |
| Echo-Echo Mode                     | 2.3 - 2.10    |

## E

|  |             |
|--|-------------|
| ElcoMaster® Data Management Software         | 12.3 - 12.9 |
| Electronic Coating Thickness Gauge           | 7.6 - 7.38  |
| Film Thickness Gauge - see Coating Thickness | 7.1 - 7.55  |

## F

|  |                            |
|--|----------------------------|
| Fitz's Atlas of Coating Defects        | 10.7                       |
| Flash Light                            | 10.5                       |
| Flash Light - Ultra Violet             | 9.21                       |
| Fluorescent UV Pinhole Flashlight      | 9.21                       |
| Foils                                  | 7.486 - 7.47               |
| FORD/ASTM Viscosity Dip Cups           | 10.9                       |
| Frikmar Dip Viscosity Cups - AFNOR     | 10.10                      |
| Frikmar Dip Viscosity Cups - DIN       | 10.10                      |
| Frikmar Dip Viscosity Cups - FORD/ASTM | 10.9                       |
| Frikmar Dip Viscosity Cups - ISO       | 10.9                       |
| Frikmar Cups                           | 10.9 - 10.10               |
| Half Cell Meter                        | 13.8 - 13.9, 13.12 - 13.16 |

## H

|                               |             |
|-------------------------------|-------------|
| Hexagonal Wet Film Comb       | 6.3, 6.5    |
| Hexagonal Wet Film Thickness  | 6.3, 6.5    |
| High Temperature Probe        | 7.12        |
| High Voltage Porosity Testers | 9.10 - 9.20 |
| Holiday Detectors             | 9.10 - 9.20 |
| Hydraulic Adhesion Tester     | 8.26 - 8.28 |

## Product Type Page

|                               |     |
|-------------------------------|-----|
| Hygrometer - Digital          | 5.7 |
| Hygrometer - Whirling & Sling | 5.8 |

## I

|   |              |
|---|--------------|
| Illuminated Inspection Mirrors          | 10.3         |
| Illuminated Magnifiers                  | 10.4         |
| Illuminated Microscope                  | 10.5         |
| Infrared Digital Thermometer            | 5.13         |
| Infrared Thermometers                   | 5.13         |
| Inspection Kits                         | 11.1 - 11.16 |
| Inspection Kit - Protective Coating     | 11.5 - 11.9  |
| Inspection Mirrors                      | 10.3         |
| Inspection Test Kits                    | 11.1 - 11.18 |
| Iron Test Strips                        | 4.18         |
| ISO 8502-3 Dust Tape Kit                | 4.22         |
| ISO Viscosity Dip Cups                  | 10.9         |
| Jeep Tester - see High Voltage Porosity | 9.10 - 9.13  |

## J

|                     |             |
|---------------------|-------------|
| Liquid Thermometers | 5.10 - 5.12 |
|---------------------|-------------|

## L

|                              |      |
|------------------------------|------|
| Long Edge Wet Film Comb      | 6.4  |
| Magnetic Surface Thermometer | 5.10 |

## M

|                                    |               |
|------------------------------------|---------------|
| Magnetic Thermometers              | 5.10          |
| Marker Pens                        | 10.6          |
| Material Thickness                 | 2.3 - 2.11    |
| Material Thickness Transducers     | 2.11          |
| Mechanical Coating Thickness Gauge | 7.42 - 7.43   |
| Metal Box Locator                  | 13.26         |
| Metal Detection                    | 13.26         |
| Microscope                         | 10.4 - 10.5   |
| Microscope with Reticules          | 10.5          |
| Mirrors                            | 10.3          |
| Mobile Application - ElcoCalc™     | 5.9, 10.8     |
| Mobile Application - ElcoMaster®   | 12.3 - 12.9   |
| Moisture Meters                    | 13.22 - 13.23 |
| NDT Inspection                     | 2.3 - 2.11    |

## N

|                            |             |
|----------------------------|-------------|
| Needle Pressure Gauge      | 1.9         |
| Needle Probe (Temperature) | 5.12        |
| Nitrate Test Kit           | 4.20, 11.14 |

| Product Type                              | Page             |
|---|------------------|
| <b>O</b>                                  |                  |
| Oils - Viscosity Cups                     | 10.12            |
| Paint Inspection Gauge                    | 7.52 - 7.55      |
| <b>P</b>                                  |                  |
| Paint Safe Marker Pens                    | 10.6             |
| pH Strips                                 | 1.5              |
| pH Tester                                 | 1.6              |
| Pictorial Surface Standards               | 3.3              |
| PIG - Paint Inspection Gauge              | 7.52 - 7.55      |
| Pinhole & Porosity                        | 9.1 - 9.29       |
| Pinhole & Porosity Detectors              | 9.6 - 9.21       |
| Pinhole Detectors                         | 9.6 - 9.7        |
| Pinless Moisture Meters                   | 13.22 - 13.23    |
| Pipe Pit Gauge                            | 3.4              |
| Plastic Wet Film Combs                    | 6.5              |
| Pocket Microscope                         | 10.4             |
| Porosity                                  | 9.1 - 9.29       |
| Porosity - High Voltage Method            | 9.10 - 9.29      |
| Porosity - Low Voltage Method             | 9.6 - 9.7        |
| Porosity - Purple Light (UV) Method       | 9.21             |
| Porosity - Ultra Violet Method            | 9.21             |
| Precision Foils                           | 7.46             |
| Pressure Gauge - Needle                   | 1.9              |
| Probe Adaptors                            | 7.25             |
| Protective Coating Inspection Kits        | 11.5 - 11.9      |
| Psychrometers - Sling                     | 5.8              |
| Pull Off Adhesion Tester                  | 8.6 - 8.23       |
| Pulsed DC Holiday Detector                | 9.10 - 9.13      |
| Pulsed DC Holiday Detector Inspection Kit | 11.16            |
| Punch Aluminium Wet Film Comb             | 6.5              |
| Purple Light (UV) Porosity                | 9.21             |
| Push Off Adhesion Tester                  | 8.24 - 8.28      |
| Relative Humidity Gauge                   | 5.3 - 5.6        |
| <b>R</b>                                  |                  |
| Replica Tape - Testex®                    | 3.13             |
| RH Meter - see Dewpoint Meter             | 5.3 - 5.6        |
| Roller - Dust Tape                        | 4.22             |
| Roughness Comparator                      | 3.5, 3.14 - 3.15 |
| Safety Torch / Flash Light                | 10.5             |
| <b>S</b>                                  |                  |
| Salt Conductivity Meter                   | 1.8, 4.15        |

| Product Type                        | Page                                |
|-------------------------------------|-------------------------------------|
| Salt Contamination Meter            | 1.8, 4.15                           |
| Scan Mode                           | 2.3 - 2.11, 7.6 - 7.29, 7.33 - 7.38 |
| Sling Hygrometer                    | 5.8                                 |
| Sling Psychrometers                 | 5.8                                 |
| Software - Coating Inspection       | 12.1 - 12.9                         |
| Software - Concrete                 | 13.17                               |
| Software - Surface Profile          | 12.1 - 12.9                         |
| Software - Viscosity                | 10.8                                |
| Spark Testers                       | 9.10 - 9.20                         |
| Steel Ultrasonic Thickness Gauge    | 2.3 - 2.11                          |
| Sulphate Test Kit                   | 4.20, 11.14                         |
| Surface Comparators                 | 3.14 - 3.15                         |
| Surface Contamination Kit           | 4.17, 11.11                         |
| Surface Moisture Meter              | 13.22 - 13.23                       |
| Surface Probe - Climate             | 5.6                                 |
| Surface Profile Comparator          | 3.14 - 3.15                         |
| Surface Profile Gauge               | 3.6 - 3.12                          |
| Surface Roughness Comparator        | 3.14                                |
| Surface Standards - Pictorial       | 3.3                                 |
| Surface Standards - Visual          | 3.3                                 |
| Surface Thermometers                | 5.10 - 5.13                         |
| Swab Test Kit - Amine Blush         | 4.21                                |
| Test Strips                         | 1.5                                 |
| Testex® Replica Tape                | 3.13                                |
| <b>T</b>                            |                                     |
| Thermometers - Air                  | 5.3 - 5.6                           |
| Thermometers - Liquid               | 5.10 - 5.12                         |
| Thermometers - Magnetic             | 5.10                                |
| Thermometers - Paint                | 5.10 - 5.12                         |
| Thermometers - Surface              | 5.10 - 5.13                         |
| Thickness Gauge                     | 3.14                                |
| ThruPaint™                          | 2.3 - 2.10                          |
| Transducers                         | 2.11                                |
| Ultrasonic Thickness Gauge          | 2.3 - 2.10                          |
| Ultrasonic Transducers              | 2.11                                |
| <b>U</b>                            |                                     |
| Universal Paint Inspection Gauge    | 7.52 - 7.55                         |
| UV Pinhole Flashlight               | 9.21                                |
| Velocity Mode                       | 2.3 - 2.10                          |
| Viscosity Cups                      | 10.8 - 10.14                        |
| <b>V</b>                            |                                     |
| Viscosity Cup Converter Application | 10.14                               |



| Product Type                             | Page         |
|--|--------------|
| Viscosity - Accessories                  | 10.13        |
| Viscosity - AFNOR Cups                   | 10.10        |
| Viscosity - Cup Calibration Oils         | 10.12        |
| Viscosity - DIN Cups                     | 10.10        |
| Viscosity - FORD/ASTM Cups               | 10.9         |
| Viscosity - Frikmar Dip Cups             | 10.9 - 10.10 |
| Viscosity - Frikmar Dip Cups - AFNOR     | 10.10        |
| Viscosity - Frikmar Dip Cups - DIN       | 10.10        |
| Viscosity - Frikmar Dip Cups - FORD/ASTM | 10.9         |
| Viscosity - Frikmar Dip Cups - ISO       | 10.9         |
| Viscosity - ISO Cups                     | 10.9         |
| Viscosity - Zahn Cups                    | 10.11        |
| Viscosity Conversion Chart               | 10.14        |
| Viscosity Cup Accessories                | 10.13        |
| Viscosity Cup Conversion Chart           | 10.14        |
| Waterproof Probe                         | 7.24         |
| Weld Gauge                               | 3-4          |

## W

|                               |           |
|-------------------------------|-----------|
| Wet Film Combs                | 6.3 - 6.5 |
| Wet Film Combs - 'Disposable' | 6.5       |
| Wet Film Combs - Plastic      | 6.5       |
| Wet Film Thickness            | 6.1 - 6.6 |
| Wet Film Wheels               | 6.6       |
| Whirling & Sling Hygrometer   | 5.8       |
| Whirling Hygrometer           |           |

5.8

## Z

|                     |       |
|---------------------|-------|
| Zahn Viscosity Cups | 10.11 |
| Zero Test Plates    | 7.48  |

Elcometer 224 Model T, Elcometer 319 Model T, Elcometer 456 Model S & T, Elcometer 456 IPC Model S & T, Elcometer 500 Model T, Elcometer 510 Model T, Elcometer 130 Model T, Elcometer 130 SSP: Suitable for mobile devices running Android™ software version 2.1 and upwards. Android™ is a trademark of Google Inc .

iPad, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a trademark of Apple Inc., registered in the U.S. and other countries.

Elcometer and ElcoMaster are registered trademarks of Elcometer Limited. PINIP™, ViscosityMaster™ & ElcoCalc™ are trademarks of Elcometer Limited. All other trademarks are acknowledged.

Due to our policy of continuous improvement, Elcometer Limited reserves the right to change specifications without notice. All gauges are supplied with a 1 year warranty as standard unless stated otherwise.

© Elcometer Limited, 2022. All rights reserved. No part of this document may be reproduced, transmitted, stored (in a retrieval system or otherwise), or translated into any language, in any form, or by any means, without the prior written permission of Elcometer Limited.

## Velocity Chart for the preset choice of 39 materials in the Elcometer MTG

| Elcometer Material Number | Material Description (Chemical Symbol/ Grouping) | Material Name                     | Sound Velocity (m/sec) | Sound Velocity (in/μsec) | Source of Value<br>NPL = National Physics Laboratory<br>ASNT = The American Society for Non destructive Testing<br>Industry = Industry knowledge |
|---------------------------|--|-----------------------------------|------------------------|--------------------------|--|
| 1                         | Fe   | Iron (soft)                       | 5960                   | 0.235                    | NPL  |
| 2                         | Fe   | Iron Cast                         | 4990                   | 0.196                    | NPL  |
| 3                         | Al   | Aluminium (7075-T6)               | 6350                   | 0.250                    | ASNT   |
| 4                         | Ti   | Titanium                          | 6100                   | 0.240                    | ASNT   |
| 5                         | Mg   | Magnesium                         | 5790                   | 0.228                    | ASNT   |
| 6                         | Ni   | Nickel                            | 5630                   | 0.222                    | ASNT   |
| 7                         | W  | Tungsten                          | 5180                   | 0.204                    | ASNT   |
| 8                         | Cu   | Copper                            | 4660                   | 0.183                    | ASNT   |
| 9                         | Zn   | Zinc                              | 4190                   | 0.165                    | NPL  |
| 10                        | Ag   | Silver                            | 3600                   | 0.142                    | Industry   |
| 11                        | Sn   | Tin                               | 3380                   | 0.133                    | NPL  |
| 12                        | Pt   | Platinum                          | 3260                   | 0.128                    | NPL  |
| 13                        | Au   | Gold                              | 3240                   | 0.128                    | NPL  |
| 14                        | Cd   | Cadmium                           | 2780                   | 0.109                    | NPL  |
| 15                        | Bi   | Bismuth                           | 2180                   | 0.086                    | Industry   |
| 16                        | Pb   | Lead                              | 2160                   | 0.085                    | ASNT   |
| 17                        | Cobalt-chromium Alloy                            | Stellite                          | 6990                   | 0.275                    | Industry   |
| 18                        | Iron Alloy                                       | Steel (Carbon 1018)               | 5920                   | 0.233                    | Industry   |
| 19                        | Iron Alloy                                       | Steel (Alloy 4340)                | 5850                   | 0.230                    | Industry   |
| 20                        | Nickel-chromium Alloy                            | Inconel (625)                     | 5820                   | 0.229                    | Industry   |
| 21                        | Silver Alloy                                     | Stainless Steel, (Austenitic 304) | 5660                   | 0.233                    | ASNT   |
| 22                        | Copper Alloy                                     | Constantan                        | 5180                   | 0.204                    | NPL  |
| 23                        | Copper-nickel Alloy                              | German Silver                     | 4760                   | 0.187                    | Industry   |
| 24                        | Copper-zinc Alloy                                | Brass (Naval)                     | 4430                   | 0.174                    | ASNT   |
| 25                        | Non-metal  | Glass (Quartz)                    | 5930                   | 0.233                    | ASNT   |
| 26                        | Non-metal  | Glass (Crown)                     | 5660                   | 0.223                    | NPL  |
| 27                        | Non-metal  | Glass (Flint)                     | 5260                   | 0.207                    | NPL  |
| 28                        | Non-metal  | Porcelain                         | 5840                   | 0.230                    | Industry   |
| 29                        | Non-metal  | Plexiglas                         | 2760                   | 0.109                    | Industry   |
| 30                        | Non-metal  | Glass Fibre                       | 2740                   | 0.108                    | Industry   |
| 31                        | Non-metal  | Nylon                             | 2680                   | 0.106                    | NPL  |
| 32                        | Non-metal  | Epoxy Resin                       | 2540                   | 0.100                    | Industry   |
| 33                        | Non-metal  | Polystyrene                       | 2350                   | 0.093                    | NPL  |
| 34                        | Non-metal  | PVC                               | 2330                   | 0.092                    | NPL  |
| 35                        | Non-metal  | Rubber (Butyl)                    | 1830                   | 0.072                    | Industry   |
| 36                        | Non-metal  | Rubber (Natural)                  | 1600                   | 0.063                    | NPL  |
| 37                        | Non-metal  | Polyurethane                      | 1780                   | 0.070                    | Industry   |
| 38                        | Non-metal  | Teflon                            | 1400                   | 0.055                    | NPL  |
| 39                        | Non-metal  | Water                             | 1490                   | 0.059                    | ASNT   |



# Elcometer catalogues



Blast  
Equipment



Spray  
Equipment



Inspection  
Equipment



NDT  
Equipment



## Industrial finishing inspection & physical test equipment

From production lines to paint formulation laboratories, quality assurance to academic institutions, **Elcometer's** comprehensive range of **coating inspection** and **physical test equipment** will meet your inspection requirements.



## Protective coating inspection equipment

From offshore oil & gas platforms to shipyards, bridges to wind farms, the Elcometer coating inspection division provides a comprehensive range of **coating inspection**, **concrete inspection** and **metal detection** equipment to meet the needs of the protective coatings industry.



# Contact Us

## ENGLAND, UK

Elcometer Limited  
+44 (0)161 371 6000  
sales@elcometer.com  
www.elcometer.com

## FRANCE

Elcometer Sarl  
+33 (0)2 38 86 33 44  
fr\_info@elcometer.com  
www.elcometer.fr

## GERMANY

Elcometer Instruments GmbH  
AALEN: +49 (0) 7361 52806 0  
LEER: +49 (0) 7361 528 06 60  
de\_info@elcometer.com  
www.elcometer.de

## THE NETHERLANDS

Elcometer B.V.  
+31 (0)30 259 1818  
nl\_info@elcometer.com  
www.elcometer.nl

## JAPAN

Elcometer KK  
+81 (0)3 6869 0770  
jp\_info@elcometer.com  
www.elcometer.co.jp

## REPUBLIC OF SINGAPORE

Elcometer (Asia) Pte Ltd  
+65 6462 2822  
asia@elcometer.com  
www.elcometer.com

## UNITED ARAB EMIRATES

Elcometer LLC  
+971 4 295 0191  
+971 4 280 3526  
uae\_sales@elcometer.com  
www.elcometer.ae

## UNITED STATES OF AMERICA

Elcometer Inc  
WARREN, MI: +1 248 650 0500  
HOUSTON, TX: +1 713 450 0631  
Toll Free: 800 521 0635  
inc@elcometer.com  
www.elcometer.com



With a **global network** of **offices**, **training centres**, **distribution centres** and **distributors**, all expertly trained on our products to provide **full after sales service** and **support** Elcometer are wherever you are.

To find your local representative click 'Contact Us' on **elcometer.com**





elcometer®  
[www.elcometer.com](http://www.elcometer.com)